

P-06-185

Oskarshamn site investigation

Difference flow logging of borehole KLX12A

Subarea Laxemar

Juha Väisäsvaara, Petri Heikkinen,
Stefan Kristiansson, Jari Pöllänen
PRG-Tec Oy

December 2006

Svensk Kärnbränslehantering AB

Swedish Nuclear Fuel
and Waste Management Co
Box 5864

SE-102 40 Stockholm Sweden

Tel 08-459 84 00
+46 8 459 84 00

Fax 08-661 57 19
+46 8 661 57 19



Oskarshamn site investigation

Difference flow logging of borehole KLX12A

Subarea Laxemar

Juha Väisäsvaara, Petri Heikkinen,
Stefan Kristiansson, Jari Pöllänen
PRG-Tec Oy

December 2006

Keywords: Laxemar, Hydrogeology, Hydraulic tests, Difference flow measurements, Flow logging, Pumping test, Transmissivity.

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the author(s) and do not necessarily coincide with those of the client.

Data in SKB's database can be changed for different reasons. Minor changes in SKB's database will not necessarily result in a revised report. Data revisions may also be presented as supplements, available at www.skb.se.

A pdf version of this document can be downloaded from www.skb.se

Abstract

Difference flow logging is a swift method for the determination of the transmissivity and the hydraulic head in borehole sections and fractures/fracture zones in core drilled boreholes. This report presents the main principles of the methods as well as the results of the measurements carried out in borehole KLX12A at Oskarshamn, Sweden, June 2006, using Posiva flow log. Posiva Flow Log is a multipurpose measurement instrument developed by PRG-Tec Oy for the use of Posiva Oy. The primary aim of the measurements was to determine the position and flow rate of flow yielding fractures in borehole KLX12A.

The first flow logging measurements were done with a 5 m test section by moving the measurement tool in 0.5 m steps. This method was used to flow log the entire measurable part of the borehole during natural (un-pumped) as well as pumped conditions. The flow measurements were repeated at the location of detected flow anomalies using a 1 m long test section. In these selective measurements the borehole was pumped and measurement tool was moved in 0.1 m steps.

Length calibration was made based on length marks milled into the borehole wall at accurately determined positions along the borehole. The length marks were detected by caliper and single-point resistance measurements using sensors connected to the flow logging tool.

A high-resolution absolute pressure sensor was used to measure the total pressure along the borehole. These measurements were carried out together with the flow measurements.

The electric conductivity (EC) and temperature of borehole water were also measured. The EC measurements were used to study the occurrence of saline water in the borehole during natural as well as pumped conditions. The EC of fracture-specific water was also measured (0.5 m test section) for a selection of fractures.

The recovery of the groundwater level in the borehole was measured after the pumping of the borehole was stopped.

Sammanfattning

Differensflödesloggning är en snabb metod för bestämning av transmissivitet och hydraulisk tryckhöjd i borrhålssektioner och sprickor/sprickzoner i kärnborrhål. Denna rapport presenterar huvudprinciperna för metoden och resultat av mätningar utförda i borrhål KLX12A i Oskarshamn, Sverige, i juni 2006 med Posiva flödesloggningsmetod. Det primära syftet med mätningarna var att bestämma läget och flödet för vattenförande sprickor i borrhål KLX12A.

Flödet till eller från en 5 m lång testsektion (som förflyttades successivt med 0,5 m) mättes i borrhål KLX12A under såväl naturliga (icke-pumpade) som pumpade förhållanden. Flödesmätningarna upprepades vid lägena för de detekterade flödesanomalierna med en 1 m lång testsektion som förflyttades successivt med 0,1 m.

Längdkalibrering gjordes baserad på längdmärkena som frästs in i borrhålsväggen vid noggrant bestämda positioner längs borrhålet. Längdmärkena detekterades med caliper-mätningar och med punktresistansmätningar med hjälp av sensorer anslutna på flödesloggningssonden.

En högupplösande absoluttryckgivare användes för att mäta det absoluta totala trycket längs borrhålet. Dessa mätningar utfördes tillsammans med flödesmätningarna.

Elektrisk konduktivitet och temperatur på borrhålsvattnet mättes också. EC-mätningarna användes för att studera förekomsten av saltvatten i borrhålet under såväl naturliga som pumpade förhållanden. Sprickspecifikt (0,5 m lång testsektion) EC mättes även vid utvalda sprickor.

Återhämtningen av grundvattennivån mättes efter att pumpningen i hålet avslutades.

1 Introduction

This document reports the results acquired by flow logging the borehole KLX12A at Oskarshamn, Sweden. The work was carried out in accordance with activity plan AP PS 400-06-048. The controlling documents for performing according to this activity plan are listed in Table 1-1. The list of the controlling documents excludes the assignment-specific quality plans. Both the activity plan and the method descriptions are SKB's internal controlling documents.

The difference flow logging in the core drilled borehole KLX12A at Oskarshamn was conducted between June 8 and 16, 2006. KLX12A is 602.29 m long and its inclination is 75.1° from the horizontal plane. The borehole was drilled using a telescopic drilling technique, where the c. 0–100 m interval was percussion drilled and the remaining c. 100–600 m interval was core drilled. The first 17.92 m of the percussion drilled section was cased with cement. The inner diameter of the casing and the percussion drilled section is approximately 200 mm. The diameter of the core drilled section is 76 mm. There is a conical steel guide at 97.36 m–102.13 m. The values given above are values on the axis parallel to the borehole. We call this the borehole length axis.

The location of KLX12A in the subarea of Laxemar in Oskarshamn is illustrated in Figure 1.1.

The field work and the subsequent data interpretation were conducted by PRG-Tec Oy as Posiva Oy's subcontractor. The Posiva Flow Log/Difference Flow method has previously been employed in Posiva's site characterisation programme in Finland as well as at the Äspö Hard Rock Laboratory at Simpevarp, Sweden.

Table 1-1. SKB's internal controlling documents for the activities concerning this report.

Activity plan	Number	Version
Difference flow logging in borehole KLX12A	AP PS 400-06-048	1.0
Method descriptions	Number	Version
Method description for difference flow logging	SKB MD 322.010	1.0
Instruktion för rengöring av borrhålsutrustning och viss markbaserad utrustning	SKB MD 600.004	1.0
Instruktion för längdkalibrering vid undersökningar i kärnborrhål	SKB MD 620.010	1.0
Instruktion för analys av injektions- och enhålpumptester	SKB MD 320.004	1.0

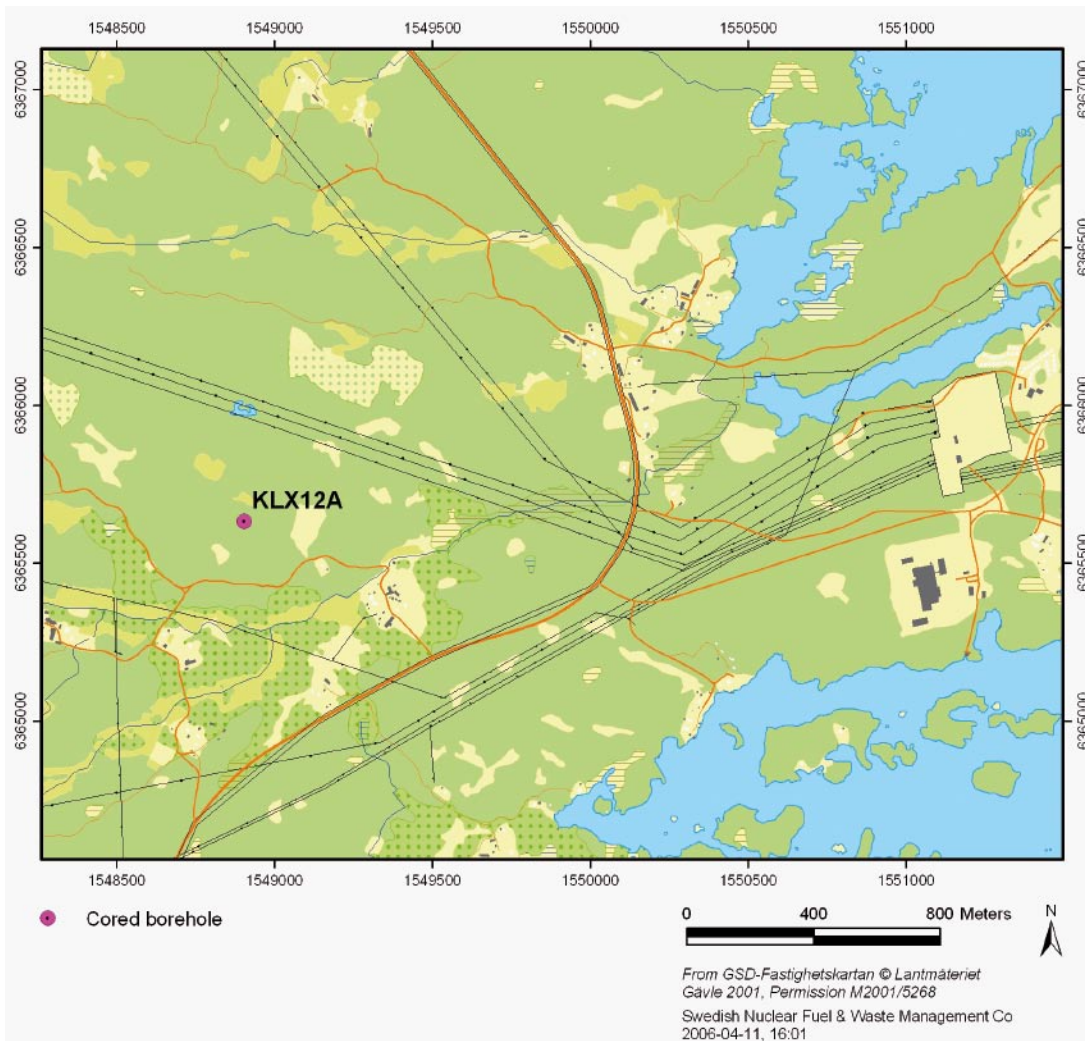


Figure 1-1. Site map showing the location of borehole KLX12A situated in the subarea of Laxemar.

2 Objective and scope

The main objective of the difference flow logging in KLX12A was to identify water-conductive sections/fractures. Secondly, the measurements aim at a hydrogeological characterisation, including the prevailing water flow balance in the borehole. Based on the results of these investigations, a more detailed characterisation of flow anomalies along the borehole, e.g. an estimate of the conductive fracture frequency (CFF), may be obtained.

Besides difference flow logging, the measuring programme for borehole KLX12A also included supporting measurements, performed in order to gain a better understanding of the overall hydrogeochemical conditions. The data gathered in these measurements consisted of the single-point resistance of the borehole wall and the electric conductivity of the borehole water. Furthermore, the recovery of the groundwater level after pumping was registered and interpreted hydraulically.

A high-resolution absolute pressure sensor was used to measure the total pressure along the borehole. These measurements were carried out together with the flow measurements. The results are used in the calculation of the hydraulic head along the borehole.

Single-point resistance measurements were also combined with caliper (borehole diameter) measurements to detect depth marks milled into the borehole wall at accurately determined positions. This procedure allowed for the length calibration of all other measurements.

3 Principles of measurement and interpretation

3.1 Measurements

Unlike traditional types of borehole flowmeters, the Difference flowmeter measures the flow rate into or out of limited sections of the borehole instead of measuring the total cumulative flow rate along the borehole. The advantage of measuring the flow rate in isolated sections is a better detection of the incremental changes of flow along the borehole, which are generally very small and can easily be missed using traditional types of flowmeters.

Rubber disks at both ends of the downhole tool are used to isolate the flow rate in the test section from the flow rate in the rest of the borehole, see Figure 3-1. The flow rate along the borehole outside the isolated test section passes through the test section by means of a bypass pipe and is discharged at the upper end of the downhole tool. This entire structure is called the flow guide.

The Difference flowmeter can be used in two modes, a sequential mode and an overlapping mode. In the sequential mode, the measurement increment is as long as the section length. It is used for determining the transmissivity and the hydraulic head (Öhberg and Rouhiainen 2000). In the overlapping mode, the measurement increment is shorter than the section length. It is mostly used to determine the location of hydraulically conductive fractures and to classify them with regards to their flow rates.

The Difference flowmeter measures the flow rate into or out of the test section by means of thermistors, which track both the dilution (cooling) of a thermal pulse and the transfer of a thermal pulse with moving water. In the sequential mode, both methods are used, whereas in the overlapping mode, only the thermal dilution method is used because it is faster than thermal pulse method.

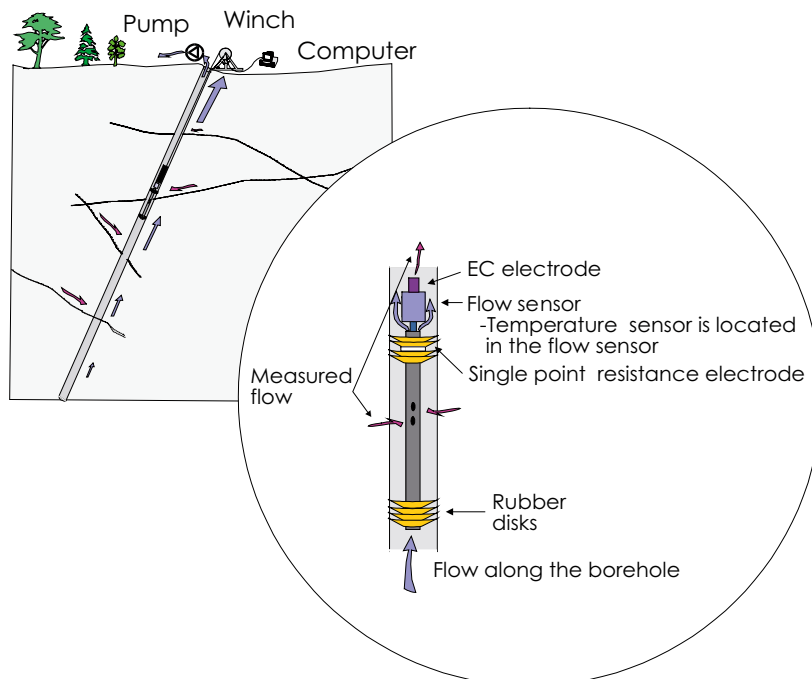


Figure 3-1. Schematic of the downhole equipment used in the Difference flowmeter.

Besides incremental changes of flow, the downhole tool of the Difference flowmeter can also be used to measure:

- The electric conductivity (EC) of the borehole water and fracture-specific water. The electrode for the EC measurements is located on the top of the flow sensor, Figure 3-1.
- The single-point resistance (SPR) of the borehole wall (grounding resistance). The electrode of the Single point resistance tool is located in between the uppermost rubber disks, see Figure 3-1. This method is used for high-resolution depth/length determination of fractures and geological structures.
- The diameter of the borehole (caliper). The caliper tool, combined with SPR, is used for the detection of the depth/length marks milled into the borehole wall. This enables an accurate depth/length calibration of the flow measurements.
- The prevailing water pressure profile in the borehole. The pressure sensor is located inside the electronics tube and connected through a tube to the borehole water, Figure 3-2.
- Temperature of the borehole water. The temperature sensor is placed in the flow sensor, Figure 3-1.

All of the above measurements were performed in KLX12A.

The principles of difference flow measurements are described in Figures 3-3 and 3-4. The flow sensor consists of three thermistors, see Figure 3-3a. The central thermistor, A, is used both as a heating element and for thermal pulse method and for registration of temperature changes in the thermal dilution method, Figures 3-3b and c. The side thermistors, B1 and B2, serve to detect the moving thermal pulse, Figure 3-3d, caused by the constant power heating in A, Figure 3-3b.

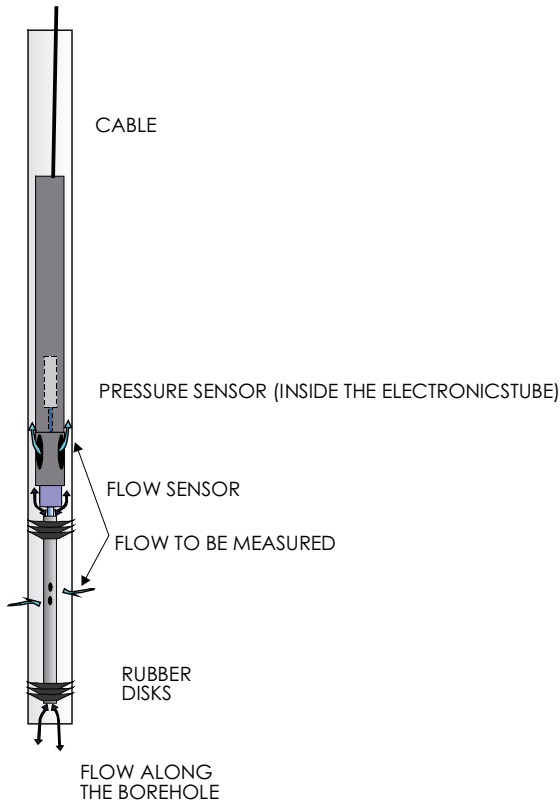


Figure 3-2. The absolute pressure sensor is located inside the electronics tube and connected through a tube to the borehole water.

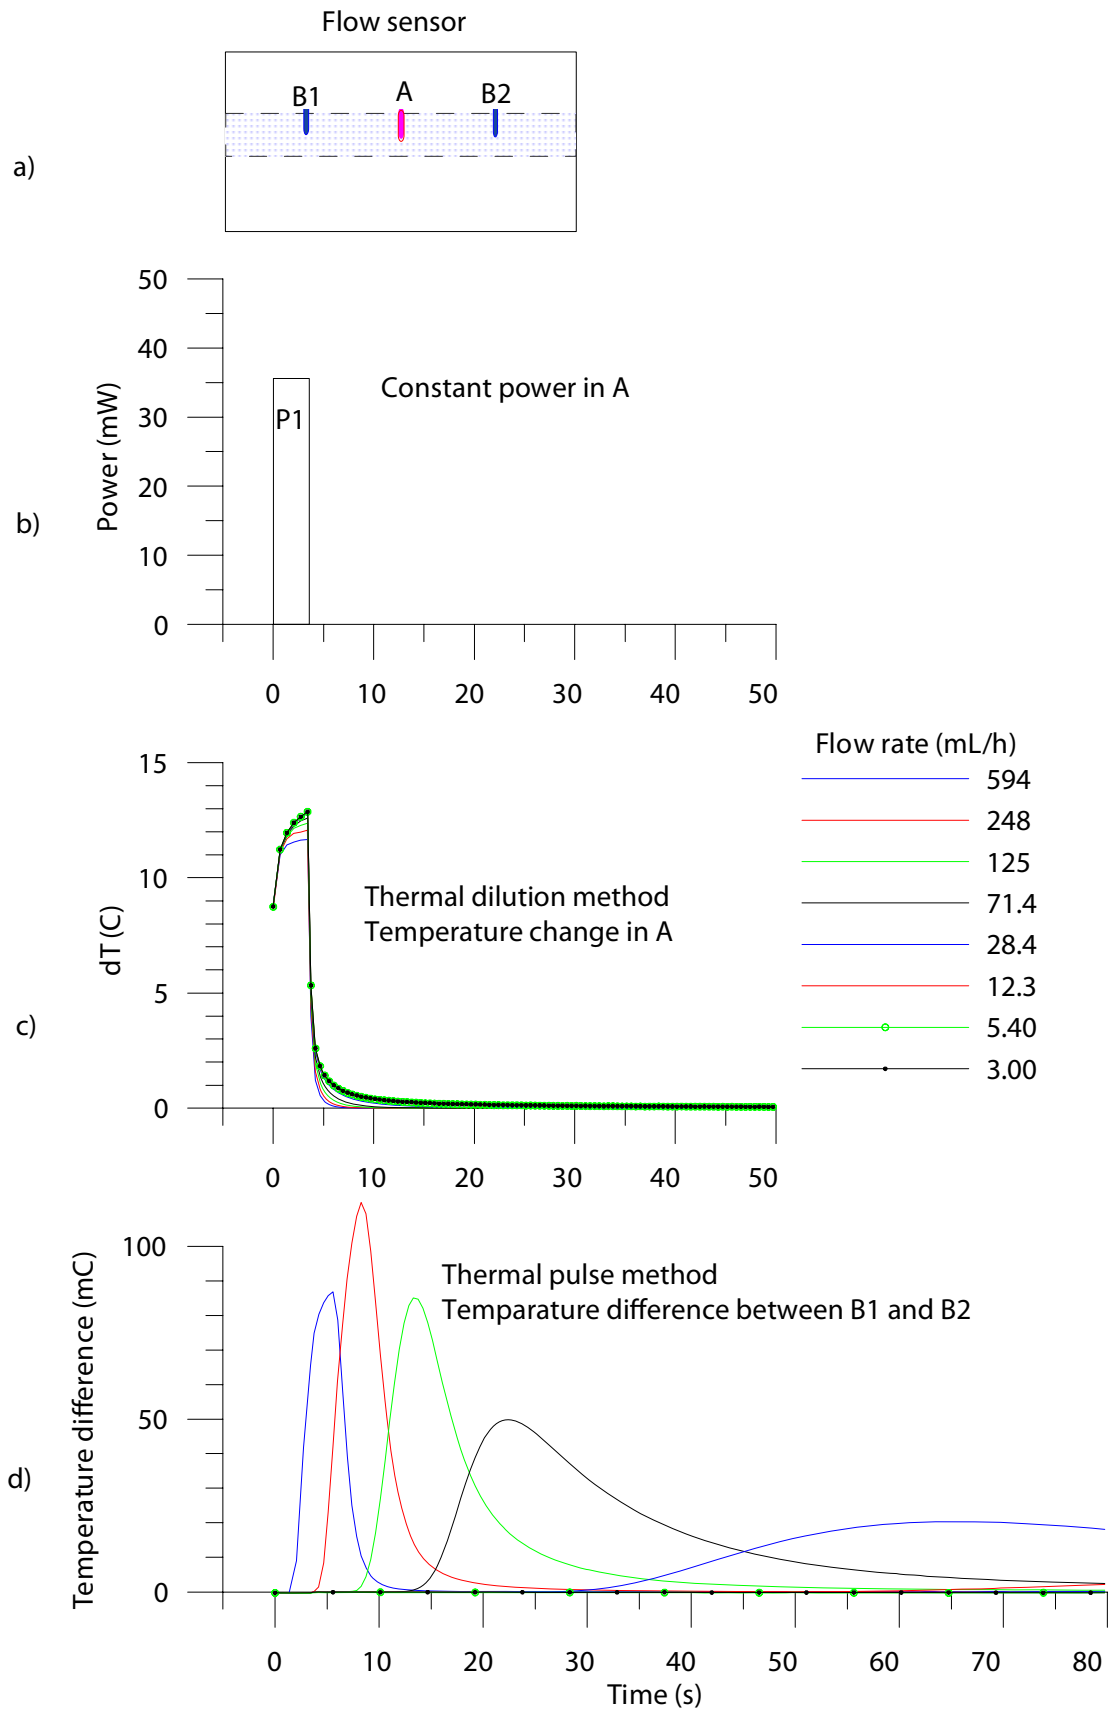


Figure 3-3. Flow measurement, flow rate < 600 mL/h.

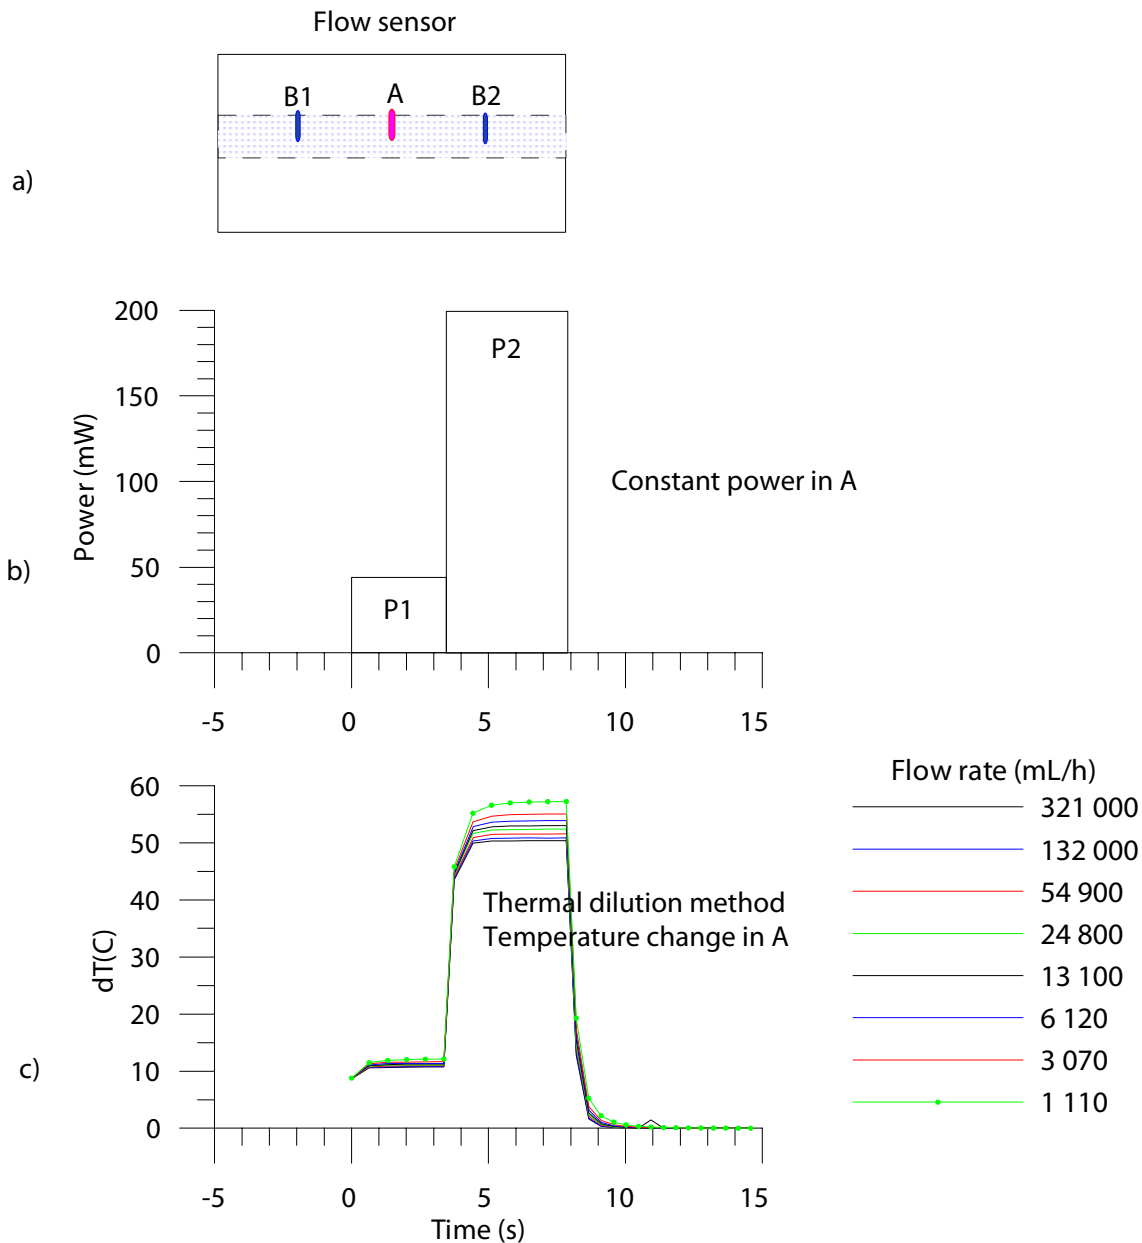


Figure 3-4. Flow measurement, flow rate > 600 mL/h.

Flow rate is measured during the constant power (P_1) heating (Figure 3-3b). If the flow rate exceeds 600 mL/h, the constant power heating is increased (to P_2), Figure 3-4b, and the thermal dilution method is applied.

If the flow rate during the constant power heating (Figure 3-3b) falls below 600 mL/h, the measurement continues by monitoring transient thermal dilution (Figure 3-3c) and thermal pulse response (Figure 3-3d). When applying the thermal pulse method, thermal dilution is also measured. The same heat pulse is used for both methods.

The flow is measured when the tool is at rest. After the tool is transferred to a new position, there is a waiting time (the duration of which can be adjusted according to the prevailing circumstances) before the heat pulse (Figure 3-3b) is applied. The waiting time after the constant power thermal pulse can also be adjusted, but is normally 10 s for thermal dilution and 300 s for the thermal pulse method. The measurement range of each method is given in Table 3-1.

Table 3-1. Ranges of flow measurement.

Method	Range of measurement (mL/h)
Thermal dilution P1	30–6,000
Thermal dilution P2	600–300,000
Thermal pulse	6–600

The lower end limits of the thermal dilution and the thermal pulse methods in Table 3-1 are theoretical lowest measurable values. Depending on the borehole conditions these limits may not always prevail. Examples of disturbing conditions are suspended drilling debris in the borehole water, gas bubbles in the water and high flow rates (above about 30 L/min) along the borehole. If the disturbing conditions are significant, a practical measurement limit is calculated for each set of data.

3.2 Interpretation

The interpretation of data is based on Thiems or Dupuits formula that describes a steady state and two dimensional radial flow into the borehole /Marsily 1986/:

$$h_s - h = Q / (T \cdot a) \quad 3-1$$

where

h is the hydraulic head in the vicinity of the borehole and h_s at the radius of influence (R),

Q is the flow rate into the borehole,

T is the transmissivity of the test section,

a is a constant depending on the assumed flow geometry.

For cylindrical flow, the constant a is:

$$a = 2 \cdot \pi / \ln(R/r_0) \quad 3-2$$

where

r_0 is the radius of the well and

R is the radius of influence, i.e. the zone inside which the effect of the pumping is felt.

If flow rate measurements are carried out using two levels of hydraulic heads in the borehole, i.e. natural or pump-induced hydraulic heads, then the undisturbed (natural) hydraulic head and transmissivity of the tested borehole sections can be calculated. Two equations can be written directly from equation 3-1:

$$Q_{s0} = T_s \cdot a \cdot (h_s - h_0) \quad 3-3$$

$$Q_{s1} = T_s \cdot a \cdot (h_s - h_1) \quad 3-4$$

where

h_0 and h_1 are the hydraulic heads in the borehole at the test level,

Q_{s0} and Q_{s1} are the measured flow rates in the test section,

T_s is the transmissivity of the test section and

h_s is the undisturbed hydraulic head of the tested zone far from the borehole.

Since, in general, very little is known about the flow geometry, cylindrical flow without any skin zones is assumed. Cylindrical flow geometry is also justified because the borehole is at a constant head and there are no strong pressure gradients along the borehole, except at its ends.

The radial distance R to the undisturbed hydraulic head h_s is not known and must be assumed. Here a value of 500 is selected for the quotient R/r_0 .

The hydraulic head and the test section transmissivity can be deduced from the two measurements:

$$h_s = (h_0 - b \cdot h_1) / (1 - b) \quad 3-5$$

$$T_s = (1/a) (Q_{s0} - Q_{s1}) / (h_1 - h_0) \quad 3-6$$

where

$$b = Q_{s0} / Q_{s1}$$

Transmissivity (T_f) and the hydraulic head (h_f) of individual fractures can be calculated provided that the flow rates of individual fractures are known. Similar assumptions as above have to be used (a steady state cylindrical flow regime without skin zones).

$$h_f = (h_0 - b \cdot h_1) / (1 - b) \quad 3-7$$

$$T_f = (1/a) (Q_{f0} - Q_{f1}) / (h_1 - h_0) \quad 3-8$$

where

Q_{f0} and Q_{f1} are the flow rates at a fracture and

h_f and T_f are the hydraulic head (far away from borehole) and the transmissivity of a fracture, respectively.

Since the actual flow geometry and the skin effects are unknown, transmissivity values should be considered only as an indication of the orders of magnitude. As the calculated hydraulic heads do not depend on geometrical properties but only on the ratio of the flows measured at different heads in the borehole, they should be less sensitive to unknown fracture geometries. A discussion of potential uncertainties in the calculation of transmissivity and the hydraulic head is provided in /Ludvigson et al. 2002/.

Transmissivity of the entire borehole can be evaluated in several ways using the data of the pumping phase and of the recovery phase. For the pumping phase the assumptions above (cylindrical and steady state flow) lead to Dupuits formula /Marsily 1986/:

$$T = \frac{Q}{s2\pi} \ln\left(\frac{R}{r_0}\right), \quad 3-9$$

where

s is drawdown and

Q is the pumping rate at the end of the pumping phase.

In the Moye /Moye 1967/ formula it is assumed that the steady state flow is cylindrical near the borehole (to distance $r = L/2$, where L is the section under test) and spherical further away:

$$T = \frac{Q}{s2\pi} \cdot \left[1 + \ln\left(\frac{L}{2r_0}\right) \right], \quad 3-10$$

where L is length of test section (m), in this case the water filled, uncased part of the borehole.

4 Equipment specifications

The Posiva Flow Log/Difference flowmeter monitors the flow of groundwater into or out from a borehole by means of a flow guide (which uses rubber disks to isolate the flow). The flow guide thereby defines the test section to be measured without altering the hydraulic head. Groundwater flowing into or out from the test section is guided to the flow sensor. The flow is measured using the thermal pulse and/or thermal dilution methods. Measured values are transferred into a computer in digital form.

Type of instrument:	Posiva Flow Log/Difference Flowmeter.
Borehole diameters:	56 mm, 66 mm and 76 mm.
Length of test section:	A variable length flow guide is used.
Method of flow measurement:	Thermal pulse and/or thermal dilution.
Range and accuracy of measurement:	Table 4-1.
Additional measurements:	Temperature, Single-point resistance, Electric conductivity of water, Caliper, Water pressure.
Winch:	Mount Sopris Wna 10, 0.55 kW, 220V/50Hz. Steel wire cable 1,500 m, four conductors, Gerhard-Owen cable head.
Length determination:	Based on a marked cable and a digital length counter.
Logging computer:	PC, Windows XP.
Software:	In-house developed software using MS Visual Basic.
Total power consumption:	1.5–2.5 kW depending on the pumps.
Calibrated:	April 2006.
Calibration of cable length:	Using length marks in the borehole.
Range and accuracy of sensors is presented in Table 4-1.	

Table 4-1. Range and accuracy of sensors.

Sensor	Range	Accuracy
Flow	6–300,000 mL/h	+/- 10% curr.value
Temperature (middle thermistor)	0–50°C	0.1°C
Temperature difference (between outer thermistors)	-2 – +2°C	0.0001°C
Electric conductivity of water (EC)	0.02–11 S/m	+/- 5% curr.value
Single-point resistance	5–500,000 Ω	+/- 10% curr.value
Groundwater level sensor	0–0.1 MPa	+/- 1% fullscale
Absolute pressure sensor	0–20 MPa	+/- 0.01% fullscale

5 Performance

5.1 Execution of the field work

The commission was performed according to Activity Plan AP PS 400-06-048 (SKB internal controlling document) following the SKB Method Description 322.010, Version 1.0 (Method description for difference flow logging). Prior to the measurements, the downhole tools and the measurement cable were disinfected. Every clock was synchronized to the official Swedish time. The activity schedule of the borehole measurements is presented in Table 5-1. The items and activities in Table 5-1 are the same as in the Activity Plan.

Logging cables, wires, and pipe strings are exposed to stretching when lowered into a vertical or sub-vertical borehole. This will introduce a certain error in defining the position of a test tool connected to the end of a logging cable. Immediately after the completion of the drilling operations in borehole KLX12A, length marks were milled into the borehole wall at certain intervals to be used for length calibration of various logging tools. By using the known positions of the length marks, logging cables etc can be calibrated in order to obtain an accurate length correction of the testing tool.

Each length mark consists of two 20 mm wide tracks in the borehole wall. The distance between the tracks is 100 mm. The upper track defines a reference level. An inevitable condition for a successful length calibration is that all length marks, or at least the major part of them, are detectable. The Difference Flowmeter system uses caliper measurements in combination with single-point resistance measurements for this purpose. These methods also reveal parts of the borehole widened for some reason (fracture zones, breakouts etc). The length calibration (Item 9) of KLX12A was performed before any other measurements were started. The only exception was the dummy logging (Item 8) of the borehole which is done in order to assure that the measurement tools do not get stuck in the borehole.

The caliper/SPR-measurements in the measurement schedule were followed by measurements of the electric conductivity (EC) and temperature of the borehole water (Item 10) during natural (un-pumped) conditions.

The combined overlapping/sequential flow logging (Item 12) was carried out in the borehole with a 5 m section length and in 0.5 m length increments (step length). The measurements were performed during natural (un-pumped) conditions. Every tenth flow measurement (sequential mode) had a longer measurement time than normally in the overlapping mode. This was done in order to ensure the direction of the flow (into the borehole or out of it). The telescopic part of the borehole was also flow logged (Item 11).

Pumping was started on June 10. After a waiting time of c. 23 hours, overlapping flow logging (Item 13) was conducted using the same section and step lengths as before.

The overlapping flow logging was then continued by re-measuring previously detected flow anomalies with a 1 m section length and a 0.1 m step length (Item 14).

The fracture-specific EC of water from some selected fractures (Item 15) was also measured.

The EC of borehole water (Item 16) was measured while the borehole was still pumped. After this, the pump was stopped and the recovery of the groundwater level was monitored (Item 17).

Table 5-1. Flow logging and testing in KLX12A. Activity schedule.

Item	Activity	Explanation	Date
2	Mobilisation at site	Unpacking the trailer. Time synchronization.	2006-06-08
8	Dummy logging	Borehole stability/risk evaluation.	2006-06-08
9	Length calibration of the downhole tool	SPR and SKB Caliper logging.	2006-06-08– 2006-06-09
10	Borehole fluid logging	Borehole EC and temperature measurements without the lower rubber disks. No pumping.	2006-06-09
12	Sequential flow logging/Combined	Overlapping flow logging, Section length $L_w=5$ m, Step length $dL=0.5$ m. No pumping.	2006-06-09– 2006-06-10
11	Telescopic part of borehole flow logging	Logging flow rate along the borehole without the lower rubber disks. No pumping.	2006-06-10
13	Sequential flow logging (Combined)	Overlapping flow logging, Section length $L_w=5$ m, Step length $dL=0.5$ m. Pumping (includes 1 day of waiting after the pumping was begun).	2006-06-10– 2006-06-12
14	Selective overlapping flow logging	Section length $L_w=1$ m, Step length $dL=0.1$ m. Pumping.	2006-06-12– 2006-06-14
15	Selective overlapping flow logging and fracture-EC	Section length $L_w=0.5$ m, Step length $dL=0.1$ m. Pumping.	2006-06-14– 2006-06-15
16	EC and temperature logging of borehole fluid	Logging without the lower rubber disks. Pumping.	2006-06-15
17	Transient registration of water level recovery	Measurement of water level and absolute pressure in the borehole after the pumping was stopped. The measurement was continued between 16–17.06.2006 by SKB.	2006-06-15– 2006-06-16

5.2 Nonconformities

There were no nonconformities during these activities.

6 Results

6.1 Length calibration

6.1.1 Caliper and SPR measurement

Accurate length measurements are difficult to conduct in long boreholes, i.e. the accurate position of the measurement equipment is difficult to determine. The main cause of inaccuracy is the stretching of the logging cable. The stretching depends on the tension on the cable which in turn depends, among other things, on the inclination of the borehole and the roughness (friction properties) of the borehole wall. The cable tension is higher when the borehole is measured upwards. The cables, especially new cables, may also stretch out permanently.

Length marks on the borehole wall can be used to minimise the length errors. The length marks are initially detected with the SKB caliper tool. The length scale is first corrected according to the length marks. Single-point resistance is recorded simultaneously with the caliper logging. All flow measurement sequences can then be length corrected by synchronising the SPR results (SPR is recorded during all the measurements except borehole EC measurements) with the original caliper/SPR-measurement.

The procedure of the length correction was the following:

- The caliper/SPR-measurements (Item 9) were initially length corrected in relation to the known length marks, Appendix 1.26, black curve. Corrections between the length marks were obtained by linear interpolation.
- The SPR curve of Item 9 was then compared with the SPR curves of Items 12, 13, 14 and 15 to obtain relative length errors of these measurement sequences.
- All SPR curves could then be synchronized, as can be seen in Appendices 1.2–1.25.

The results of the caliper and single-point resistance measurements from all measurements in the entire borehole are presented in Appendix 1.1. The five SPR-curves are plotted together with the caliper-data. These measurements correspond to Items 9, 12, 13, 14 and 15 in Table 5-1.

The caliper tool outputs a low voltage value when the borehole diameter is below 77 mm and a high value when the borehole diameter is over 77 mm.

Zoomed results of the caliper and SPR data are presented in Appendices 1.2–1.25. The detected length marks are listed in Table 6-1. All the marks were detected. They can also be seen in the SPR results. However, the SPR-anomaly is complicated due to the four rubber disks used at the upper end of the section, two at each side of the resistance electrode. If only one length mark is detected, the decision whether it is the lower or the upper mark is made based on the shape of the SPR-anomaly. The SPR-anomaly at the length marks has a distinctive shape, which can usually be recognized. In this case there were no partially recognized length marks. Appendix 1 also illustrates many natural anomalies (for example Appendices 1.3, 1.4 and 1.6) which can help in synchronizing the results.

The aim of the plots in Appendices 1.2–1.25 is to verify the accuracy of the length correction. The curves in these plots are the length corrected results.

The magnitude of the length correction along the borehole is presented in Appendix 1.26. The negative values of the error represent the situation where the logging cable has been extended, i.e. the cable is longer than the nominal length marked on it.

Table 6-1. Detected length marks.

Length marks given by SKB (m)	Length marks detected by caliper	Length marks detected by SPR
110	both	yes
150	both	yes
200	both	yes
250	both	yes
300	both	yes
350	both	yes
400	both	yes
450	both	yes
500	both	yes
550	both	yes
580	both	yes

6.1.2 Estimated error in the location of detected fractures

In spite of the length correction described above, there can still be length errors due to the following reasons:

1. The point interval in the overlapping mode flow measurements is 0.1 m. This could cause an error of ± 0.05 m.
2. The length of the test section is not exact. The specified section length denotes the distance between the nearest upper and lower rubber disks. Effectively, the section length can be larger. At the upper end of the test section there are four rubber disks. The distance between them is 5 cm. This will cause rounded flow anomalies: a flow may be detected already when a fracture is situated between the upper rubber disks. These phenomena can cause an error of ± 0.05 m when the short step length (0.1 m) is used.
3. There could sometimes be a need for the corrections between the length marks to be other than linear. This could cause an error of ± 0.1 m in the caliper/SPR-measurement (Item 9).
4. SPR curves may be imperfectly synchronized. This could cause an error of ± 0.1 m.

In the worst case, the errors from sources 1, 2, 3 and 4 are summed and the total estimated error between the length marks would be ± 0.3 m.

The situation is slightly better near the length marks. In the worst case, the errors from sources 1, 2 and 4 are summed and the total estimated error would be ± 0.2 m.

Knowing the location accurately is important when different measurements are compared, for instance flow logging and borehole TV. In a case like that the situation may not be as severe as in the worst case above, since some of the length errors are systematic and the error is nearly constant in fractures that are close to each other. However, the error caused by source 1 is random.

Fractures nearly parallel with the borehole may also be problematic. Fracture location may be difficult to define accurately in such cases.

The errors given above are estimations and are based on the experiences and observations from earlier measurements.

6.2 Electric conductivity and temperature

6.2.1 Electric conductivity and temperature of borehole water

The electric conductivity of the borehole water was initially measured when the borehole was at rest, i.e. at natural, un-pumped conditions. The measurement was performed downwards and upwards, see Appendix 2.1.

The EC measurement was repeated during pumping (after a pumping period of about five days), see Appendix 2.1, green curves. The results show clear change to less saline water above the length of about 150 m.

The temperature of the borehole water was measured simultaneously with the EC measurements. The EC values are temperature corrected to 25°C to make them more comparable with other EC measurements /Heikkonen et al. 2002/. The temperature results in Appendix 2.2 have the same length axis as the EC results in Appendix 2.1.

The length calibration of the borehole electric conductivity measurements is not as accurate as in other measurements because single-point resistance is not registered. The length correction of the SPR/caliper-measurement was applied to the borehole EC measurements, black curve in Appendix 1.26.

6.2.2 Electric conductivity of fracture-specific water

The flow direction is always from the fractures into the borehole if the borehole is pumped with a sufficiently large drawdown. This enables the determination of electric conductivity from fracture-specific water. Both electric conductivity and temperature of flowing water from the fractures were measured.

The fractures detected in the flow measurements can be measured for electric conductivity later. These fracture-specific measurements begin near the fracture which has been chosen for inspection. The tool is first moved stepwise closer to the fracture until the detected flow is larger than a predetermined limit. At this point the tool is stopped. The measurement is continued at the given position allowing the fracture-specific water to enter the section. The waiting time for the EC measurement can be automatically calculated from the measured flow rate. The aim is to flush the water volume within the test section sufficiently to gain accurate results. The measuring computer is programmed so that the water in the test section will be replaced approximately three times over. After the set of stationary measurements the tool is once again moved stepwise past the fracture for a short distance. The electric conductivity is also measured between the steps before and after the set of stationary measurements.

The test section in these measurements was 0.5 m long and the tool was moved in 0.1 m steps. The water volume in a half meter long test section is 1.8 L. The results are presented in Appendix 14. The blue symbol represents the conductivity value when the tool was moved and the red symbol is used for the set of stationary measurements.

Borehole lengths at the upper and lower ends of the section, fracture locations as well as the final EC values are listed in Table 6-2.

The electric conductivity of the entire borehole in pumped and un-pumped conditions is illustrated in Appendix 2.1 along with the fracture specific results.

Table 6-2. Fracture-specific EC.

Upper end of section (m)	Lower end of section (m)	Fractures measured (m)	EC (S/m) at 25°C
139.31	139.81	139.5	0.10
151.11	151.61	151.4	0.16
245.39	245.89	245.6	0.72
397.93	398.43	398.1	1.09
403.73	404.23	404.0	1.06
539.38	539.88	539.7	0.98

6.3 Pressure measurements

Absolute pressure was registered with the other measurements in Items 10–17. The pressure sensor measures the sum of hydrostatic pressure in the borehole and air pressure. Air pressure was also registered separately, Appendix 13.2. The hydraulic head along the borehole is determined in the following way. First, the monitored air pressure at the site is subtracted from the measured absolute pressure by the pressure sensor. The hydraulic head (h) at a certain elevation (z) is then calculated according to the following expression /Freeze et al. 1979/:

$$h = (p_{\text{abs}} - p_{\text{b}}) / (\rho_{\text{fw}} g) + z \quad (6-1)$$

where

h is the hydraulic head (metres above sea level) according to the RHB 70 reference system,

p_{abs} is absolute pressure (Pa),

p_{b} is barometric (air) pressure (Pa),

ρ_{fw} is unit density 1,000 kg/m³,

g is standard gravity 9.80665 m/s² and

z is the elevation of measurement (metres above sea level) according to the RHB 70 reference system.

A tool-specific offset of 2.46 kPa is subtracted from absolute pressure raw data.

Exact z -coordinates are important in head calculations, 10 cm error in z -coordinate means 10 cm error in the head.

The calculated head values are presented in a graph in Appendix 13.1.

6.4 Flow logging

6.4.1 General comments on results

The flow results are presented together with the single-point resistance results (right hand side) and the caliper plot (in the middle), see Appendices 3.1–3.26. Single-point resistance is usually lower in value on a fracture where a flow is detected. There are also many other resistance anomalies from other fractures and geological features. The electrode of the Single-point resistance tool is located in between the upper rubber disks. Thus, the locations of the resistance anomalies of leaky fractures coincide with the lower end of the flow anomalies in the data plot.

The flow logging was first performed with a 5 m section length and with 0.5 m length increments, see Appendices 3.1–3.26. The method (overlapping flow logging) gives the length and the thickness of conductive zones with a length resolution of 0.5 m. To obtain quick results, only the thermal dilution method is used for flow determination.

Under natural conditions, the flow direction may be into the borehole or out from it. For small flow rates (< 100 mL/h) the flow direction can not be seen in the normal overlapping mode (thermal dilution method). Therefore the waiting time was longer for the thermal pulse method to determine the flow direction at every 5 m interval. The thermal pulse method was only used to detect the flow direction and not the flow rate, which would take a longer time to measure. The longer flow direction measurement has to be done in un-pumped conditions.

The test section length determines the width of a flow anomaly of a single fracture in the plots. If the distance between flow yielding fractures is less than the section length, the anomalies will overlap, resulting in a stepwise flow data plot. Overlapping flow logging was therefore repeated in the vicinity of identified flow anomalies using a 1 m long test section and 0.1 m length increments, see Appendices 3.1–3.26 (violet curve).

Detected fractures are shown on the caliper scale with their positions (borehole length). They are interpreted on the basis of the flow curves and therefore represent flowing fractures. A long line represents the location of a leaky fracture; short line denotes that the existence of a leaky fracture is uncertain. A short line is used if the flow rate is less than 30 mL/h or the flow anomalies are overlapping or unclear because of noise.

The tables in Appendices 10 were used to calculate conductive fracture frequency (CFF). The number of conductive fractures was counted on the same 5 m sections as in Appendix 7. The number of conductive fractures was sorted in six columns depending on their flow rate. The total conductive fracture frequency is presented graphically, see Appendix 11.

The flow along the borehole was also logged for the telescopic part of the borehole (Item 11). This was done by removing the lower rubber disks and guiding all flow along the borehole through the flow sensor. The location for the measurement was at the intact bedrock just below the telescopic part of the borehole at 102.76 m. The results are presented in Appendix 13.4.

6.4.2 Transmissivity and hydraulic head of borehole sections

The entire borehole between 101.89 m and 597.25 m was flow logged with a 5 m section length and with 0.5 m length increments. All the flow logging results presented in this report are derived from measurements with the thermal dilution method.

The results of the measurements with a 5 m section length are presented in tables, see Appendix 7. Only the results with 5 m length increments are used. All borehole sections are shown in Appendices 3.1–3.26. Secup and Seclow in Appendix 7 are the distance along the borehole from the reference level (top of the casing tube) to the upper end of the test section and to the lower end of the test section, respectively. The Secup and Seclow values for the two sequences (measurements at un-pumped and pumped conditions) are not exactly identical, due to a minor difference in the cable stretching. The difference between these two sequences was small. Secup and seclow given in Appendix 7 are calculated as the average of these two values.

Pressure was measured and calculated as described in Chapter 6.3. dh_0 and dh_1 in Appendix 7 represent heads determined without and with pumping, respectively. The head in the borehole and calculated heads of borehole sections are given on the RHB 70 scale.

The flow results in Appendix 7 (Q_0 and Q_1), representing the flow rates derived from measurements during un-pumped and pumped conditions, are presented side by side to make comparison easier. Flow rates are positive if the flow direction is from the bedrock into the borehole and vice versa. With the borehole at rest, 17 sections were detected as flow yielding, 14 of which had a flow direction from the borehole into the bedrock (negative flow). During pumping, all 32 detected flows were directed towards the borehole.

The flow data is presented as a plot, see Appendix 4.1. The left hand side of each diagram represents flow from the borehole into the bedrock for the respective test sections, whereas the right hand side represents the opposite. If the measured flow was zero (below the measurement limit), it is not visible in the logarithmic scale of the appendices.

The lower and upper measurement limits of the flow are also presented in the plots (Appendix 4.1) and in the tables (Appendix 7). There are theoretical and practical lower limits of flow, see Chapter 6.4.4.

The hydraulic head and transmissivity (T_D) of borehole sections can be calculated from the flow data using the method described in Chapter 3. The hydraulic head of sections is presented in the plots if none of the two flow values at the same length is equal to zero. Transmissivity is presented if none or just one of the flows is equal to zero, see Appendix 4.2. The measurement limits of transmissivity are also shown in Appendix 4.2 and in Appendix 7. All the measurement limit values of transmissivity are based on the actual pressure difference in the borehole (dh_0 and dh_1 in Appendix 7).

The sum of detected flows without pumping (Q_0) was $-4.79 \cdot 10^{-7} \text{ m}^3/\text{s}$ ($-1,724 \text{ mL/h}$). This sum should normally be zero if all the flows in the borehole are correctly measured, the borehole is not pumped, the water level is constant, the salinity distribution in the borehole is stabilized and the fractures are at steady state pressure. In this case the sum is fairly close to zero. The last telescopic measurement at 102.76 m showed a 2,740 mL/h downward flow. If this is taken into account the flow balance is 1,016 mL/h. It should be noted that there was a c. 10 cm change in the water level during the 5 m section measurement in natural conditions and the water level was also changing during the telescopic measurement. Since the water level did not remain constant during the 5 m section measurements, the sum of detected flows may not be entirely accurate. It is also possible that there are flows below the lowest measurement sector, i.e. below 597.25 m.

6.4.3 Transmissivity and hydraulic head of fractures

An attempt was made to evaluate the magnitude of fracture-specific flow rates. The results for a 1 m section length and 0.1 m length increments were used for this purpose. The first step in this procedure is to identify the locations of individual flowing fractures and then evaluate their flow rates.

In cases where the fracture distance is less than one meter, it may be difficult to evaluate the flow rate. There are such cases for instance in Appendix 3.3. In these cases a stepwise increase or decrease in the flow data plot equals the flow rate of a specific fracture (filled triangles in the appendices).

Since the 1 m section was not used in un-pumped conditions, the results for the 5 m section were used instead. The fracture locations are important when evaluating the flow rate in un-pumped conditions. The fracture locations are known on the basis of the 1 m section measurements. It is not a problem to evaluate the flow rate in un-pumped conditions when the distance between flowing fractures is more than 5 m. The evaluation may be problematic when the distance between fractures is less than 5 m. In this case an increase or decrease of a flow anomaly at the fracture location determines the flow rate. However, this evaluation is used conservatively, it is only used in the clearest of cases and no flow value is usually evaluated in un-pumped conditions at densely fractured parts of bedrock. If the flow for a specific fracture can not be determined conclusively, the flow rate is marked with “-“ and value 0 is used in the transmissivity calculation, see Appendix 8. The flow direction is evaluated as well. The results of the evaluation are plotted in Appendix 3, blue filled triangle.

Some fracture-specific results were classified to be “uncertain”. The basis for the classification was in part of the cases a minor flow rate ($< 30 \text{ mL/h}$), but in most of the cases unclear fracture anomalies. The anomalies were unclear because the distance between them was less than one meter or the nature of an anomaly was unclear because of noise.

The total amount of detected flowing fractures was 77, but only 7 could be defined without pumping. These 7 fractures could be used for head estimation and all 77 were used for transmissivity estimations, Appendix 8. The transmissivity and hydraulic head of fractures are plotted in Appendix 5.

Fracture-specific transmissivities were compared with the transmissivities of borehole sections in Appendix 12. All fracture-specific transmissivities within each 5 m interval were first summed together to make them comparable with the measurements with a 5 m section length. The results are, in most cases, consistent between the two types of measurements. The decrease of flow as a function of pumping time can be seen in most fractures. The measurements with a 1 m section were carried out later than with a 5 m section (during pumping) and therefore the flow rate and transmissivity are generally smaller.

6.4.4 Theoretical and practical limits of flow measurements and transmissivity

The theoretical minimum of the measurable flow rate in the overlapping method (thermal dilution method only) is about 30 mL/h. The thermal pulse method can also be used when the borehole is not pumped. Its theoretical lower limit is about 6 mL/h. In these boreholes the thermal pulse method was only used to detect the flow direction not the flow rate. The upper limit of the flow measurements is 300,000 mL/h. These limits are determined on the basis of flow calibration. It is assumed that a flow can be reliably detected between the upper and lower theoretical limits in favorable borehole conditions.

In practice, the minimum measurable flow rate may be much higher. Borehole conditions may be such that the base level of flow (noise level) is higher than assumed. The noise level can be evaluated on such intervals of the borehole where there are no flowing fractures or other structures. The noise level may vary along the borehole.

There are several known reasons for increased noise levels:

- 1) Rough borehole wall.
- 2) Solid particles in the water such as clay or drilling mud.
- 3) Gas bubbles in the water.
- 4) High flow rate along the borehole.

A rough borehole wall always causes a high noise level, not only in the flow results but also in the single-point resistance results. The flow curve and the SPR curves are typically spiky when the borehole wall is rough.

Drilling mud in the borehole water usually increases the noise level. Typically this kind of noise is seen both in un-pumped and pumped conditions.

Pumping causes the pressure drop in the borehole water and in the water in the fractures near the borehole. This may lead to the release of dissolved gas and increase the amount of gas bubbles in the water. Some fractures may produce more gas than others. Sometimes the noise level is larger just above certain fractures (when the borehole is measured upwards). The reason for this is assumed to be gas bubbles. The bubbles may cause a decrease of the average density of water and therefore also decrease the measured head in the borehole.

The effect of a high flow rate along the borehole can often be seen above high flowing fractures. Any minor leak at the lower rubber disks is directly measured as increased noise.

A high noise level in a flow masks the “real” flow if it is smaller than the noise. Real flows are totally invisible if they are about ten times smaller than the noise and they are registered correctly if they are about ten times larger than the noise. Based on experience, real flows between 1/10 times the noise level and 10 times the noise level are summed with the noise.

Therefore the noise level could be subtracted from the measured flow to get the real flow. This correction has not been done so far because it is unclear whether it is applicable in each case.

The practical minimum of the measurable flow rate is evaluated and presented in Appendices 3.1–3.26 using a grey dashed line (Lower limit of flow rate). The practical minimum level of the measurable flow is always evaluated in pumped conditions since this measurement is the most important for transmissivity calculations. The limit is an approximation. It is evaluated to obtain a limit below which there may be fractures or structures that remain undetected.

The noise level in KLX12A was near 30 mL/h. In some places anomalies below the theoretical limit of the thermal dilution method (30 mL/h) could be detected. The noise line (grey dashed line) was never drawn below 30 mL/h, because the values of flow rate measured below 30 mL/h are uncertain.

In some boreholes the upper limit of flow measurement (300,000 mL/h) may be exceeded. Such fractures or structures hardly remain undetected (as the fractures below the lower limit). High flow fractures can be measured separately at a smaller drawdown. In KLX12A the flow values never exceeded the upper limit.

The practical minimum of measurable flow rate is also presented in Appendix 7 (Q-lower limit P). It is taken from the plotted curve in Appendix 3 (Lower limit of flow rate). The practical minimum of measurable transmissivity can be evaluated using Q-lower limit and the actual head difference at each measurement location, see Appendix 7 ($T_D\text{-meas}_{LP}$). The theoretical minimum measurable transmissivity ($T_D\text{-meas}_{LT}$) is evaluated using a Q value of 30 mL/h (minimum theoretical flow rate with the thermal dilution method). The upper measurement limit of transmissivity can be evaluated using the maximum flow rate (300,000 mL/h) at the actual head difference as above, see Appendix 7 ($T_D\text{-meas}_U$).

All three flow limits are also plotted with measured flow rates, see Appendix 4.1. Theoretical minimum and maximum values are 30 mL/h and 300,000 mL/h, respectively.

The three transmissivity limits are also presented graphically, see Appendix 4.2.

Similar flow and transmissivity limits are not given for the fracture-specific results, Appendices 5 and 8. Approximately the same limits would also be valid for these results. The limits for fracture-specific results are more difficult to define. For instance, it may be difficult to see a small flow rate near (< 1 m) a high flowing fracture. The situation is similar for the upper flow limit. If there are several high flowing fractures less than one meter apart from each other, the upper flow limit depends on the sum of flows which must be below 300,000 mL/h.

6.4.5 Transmissivity of the entire borehole

The pumping phase for the logging is utilized to evaluate the transmissivity of the entire borehole. This is done with the two steady state methods, described in Chapter 3.

Steady state analysis

For Dupuit's formula (equation 3-9) R/r_0 is chosen to be 500, Q was 6.25 L/min and s (drawdown) was 9.44 m. Transmissivity calculated with Dupuit's formula is $1.09 \cdot 10^{-5}$ m²/s.

In Moye's formula (equation 3-10) the length of the test section L is 584.37 m (602.29 m–17.92 m) and the borehole diameter $2r_0$ is 0.076 m. Transmissivity calculated with Moye's formula is $1.75 \cdot 10^{-5}$ m²/s.

Table 6-3. Transmissivity of the entire borehole KLX12A.

Method	Transmissivity (m²/s)
Dupuit	1.1·10 ⁻⁵
Moye	1.8·10 ⁻⁵

6.5 Groundwater level and pumping rate

The groundwater level and the pumping rate are illustrated in Appendix 13.2. The borehole was pumped between June 10 and June 15 with a drawdown of approximately 9.5 m. The pump intake was at level 1.0 m (metres above sea level, RHB 70). The groundwater level sensor (pressure transducer) was at 0.72 m (metres above sea level, RHB 70).

The groundwater recovery was measured after the pumping period, June 15–16, Appendix 13.3. The measurement was done with two sensors, the water level sensor (pressure sensor) and the absolute pressure sensor located in the flowmeter tool at the borehole length of 26.32 m. The measurement was continued by SKB between June 16 and 17.

7 Summary

In this study, the Posiva Flow Log/Difference Flow method has been used to determine the location and flow rate of flowing fractures or structures in borehole KLX12A at Oskarshamn. Measurements were carried out both when the borehole was at rest and during pumping. A 5 m section length with 0.5 m length increments was used initially. The detected flow anomalies were re-measured with a 1 m section length using a 0.1 m measurement interval.

Length calibration was made using the length marks on the borehole wall. The length marks were detected by caliper and in single-point resistance logging. The latter method was also performed simultaneously with the flow measurements, and thus all flow results could be length calibrated by synchronizing the single-point resistance logs.

The distribution of saline water along the borehole was logged by electric conductivity and temperature measurements of the borehole water. In addition, electric conductivity was measured in selected flowing fractures.

The water level in the borehole during pumping and its recovery after the pump was turned off were also measured.

The total amount of detected flowing fractures was 77. Transmissivity and hydraulic head were calculated for borehole sections and fractures. The highest transmissivity ($5.80 \cdot 10^{-6} \text{ m}^2/\text{s}$) was detected in a fracture at the length of 139.5 m. High-transmissive fractures were also found at 142.9 m, 147.5 m and 151.4 m. The lowest identified flowing fracture was at the approximate length of 553.7 m.

References

Heikkonen J, Heikkinen E, Mäntynen M, 2002. Mathematical modelling of temperature adjustment algorithm for groundwater electrical conductivity on basis of synthetic water sample analysis. Helsinki, Posiva Oy. Working report 2002-10 (in Finnish).

Ludvigson J-E, Hansson K, Rouhiainen P, 2002. Methodology study of Posiva difference flowmeter in borehole KLX02 at Laxemar. SKB R-01-52. Svensk Kärnbränslehantering AB.

Marsily G, 1986. Quantitative Hydrology, Groundwater Hydrology for Engineers. Academic Press, Inc. London.

Moye D G. Diamond drilling for foundation exploration. Civil Engineering Trans. 1967, April, pp. 95–100.


Freeze R A, Cherry J A, 1979. Groundwater. Prentice Hall, Inc., United States of America.

Öhberg A, Rouhiainen P, 2000. Posiva groundwater flow measuring techniques. Helsinki, Posiva Oy. Report POSIVA 2000-12.

Appendices


Appendices	1.1–1.25	SPR and Caliper results after length correction	37
Appendix	1.26	Length correction	62
Appendix	2.1	SPR and Caliper results after length correction	63
Appendix	2.2	Temperature of borehole water	64
Appendices	3.1–3.26	Flow rate, Caliper and Single point resistance	65
Appendix	4.1	Plotted flow rates of 5 m sections	91
Appendix	4.2	Plotted transmissivity and head of 5 m sections	92
Appendix	5	Plotted transmissivity and head of detected fractures	93
Appendix	6	Basic test data	95
Appendix	7	Results of sequential flow logging	97
Appendix	8	Inferred flow anomalies from overlapping flow logging	101
Appendix	9	Explanations for the tables in Appendices 6–8	103
Appendix	10	Conductive fracture frequency	105
Appendix	11	Plotted conductive fracture frequency	109
Appendix	12	Comparison between section transmissivity and fracture transmissivity	111
Appendix	13.1	Head in the borehole during flow logging	113
Appendix	13.2	Air pressure, water level in the borehole and pumping rate during flow logging	114
Appendix	13.3	Groundwater recovery after pumping	115
Appendix	13.4	Vertical flow along the borehole at 102.76 m	116
Appendix	14	Fracture-specific EC results	117

Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

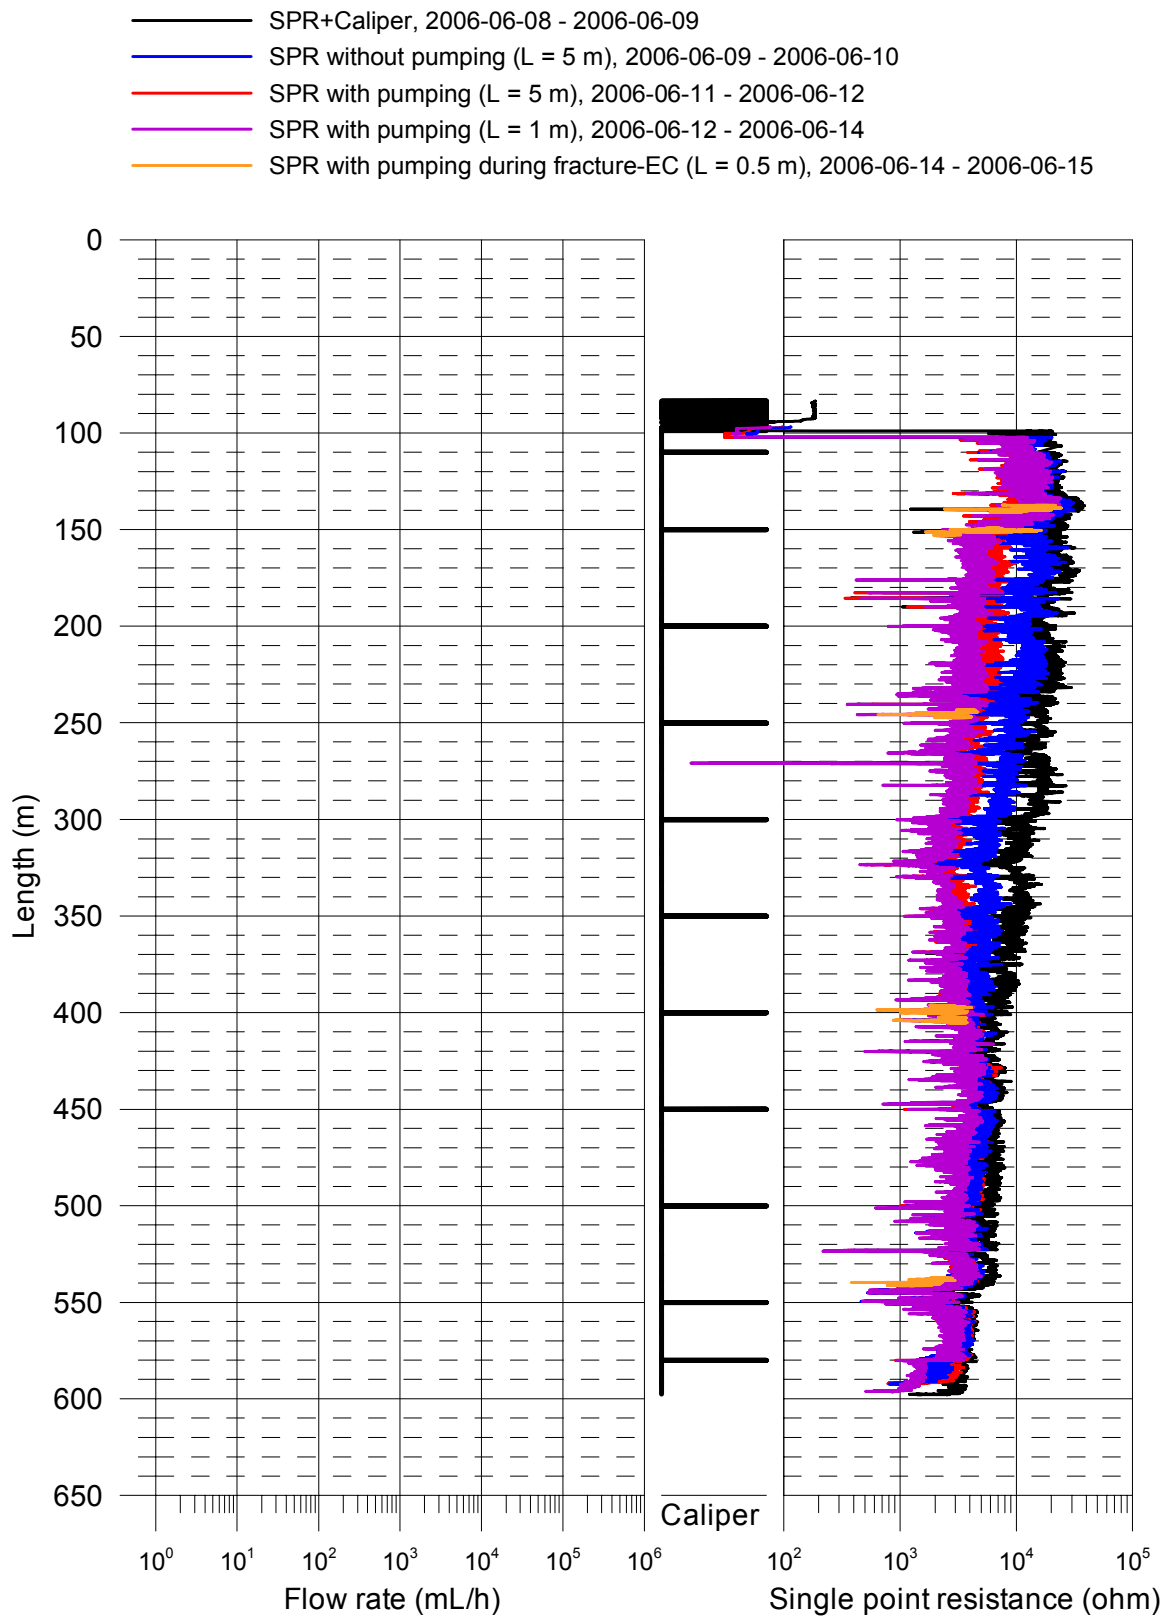


Laxemar, borehole KLX12A
SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

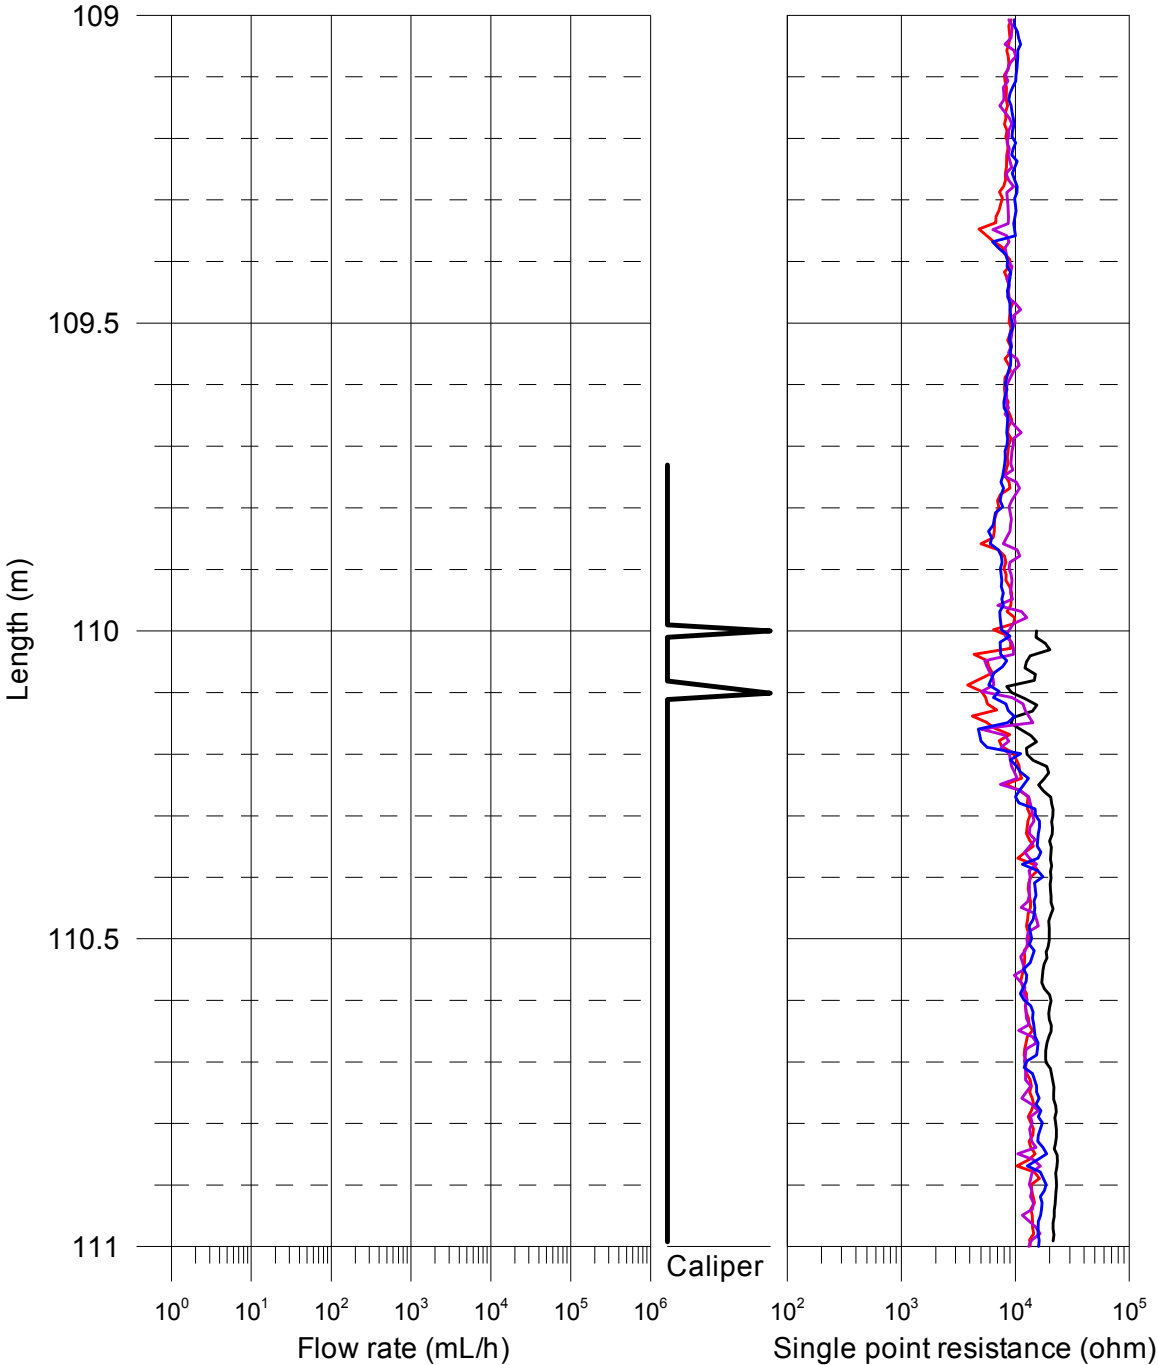


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

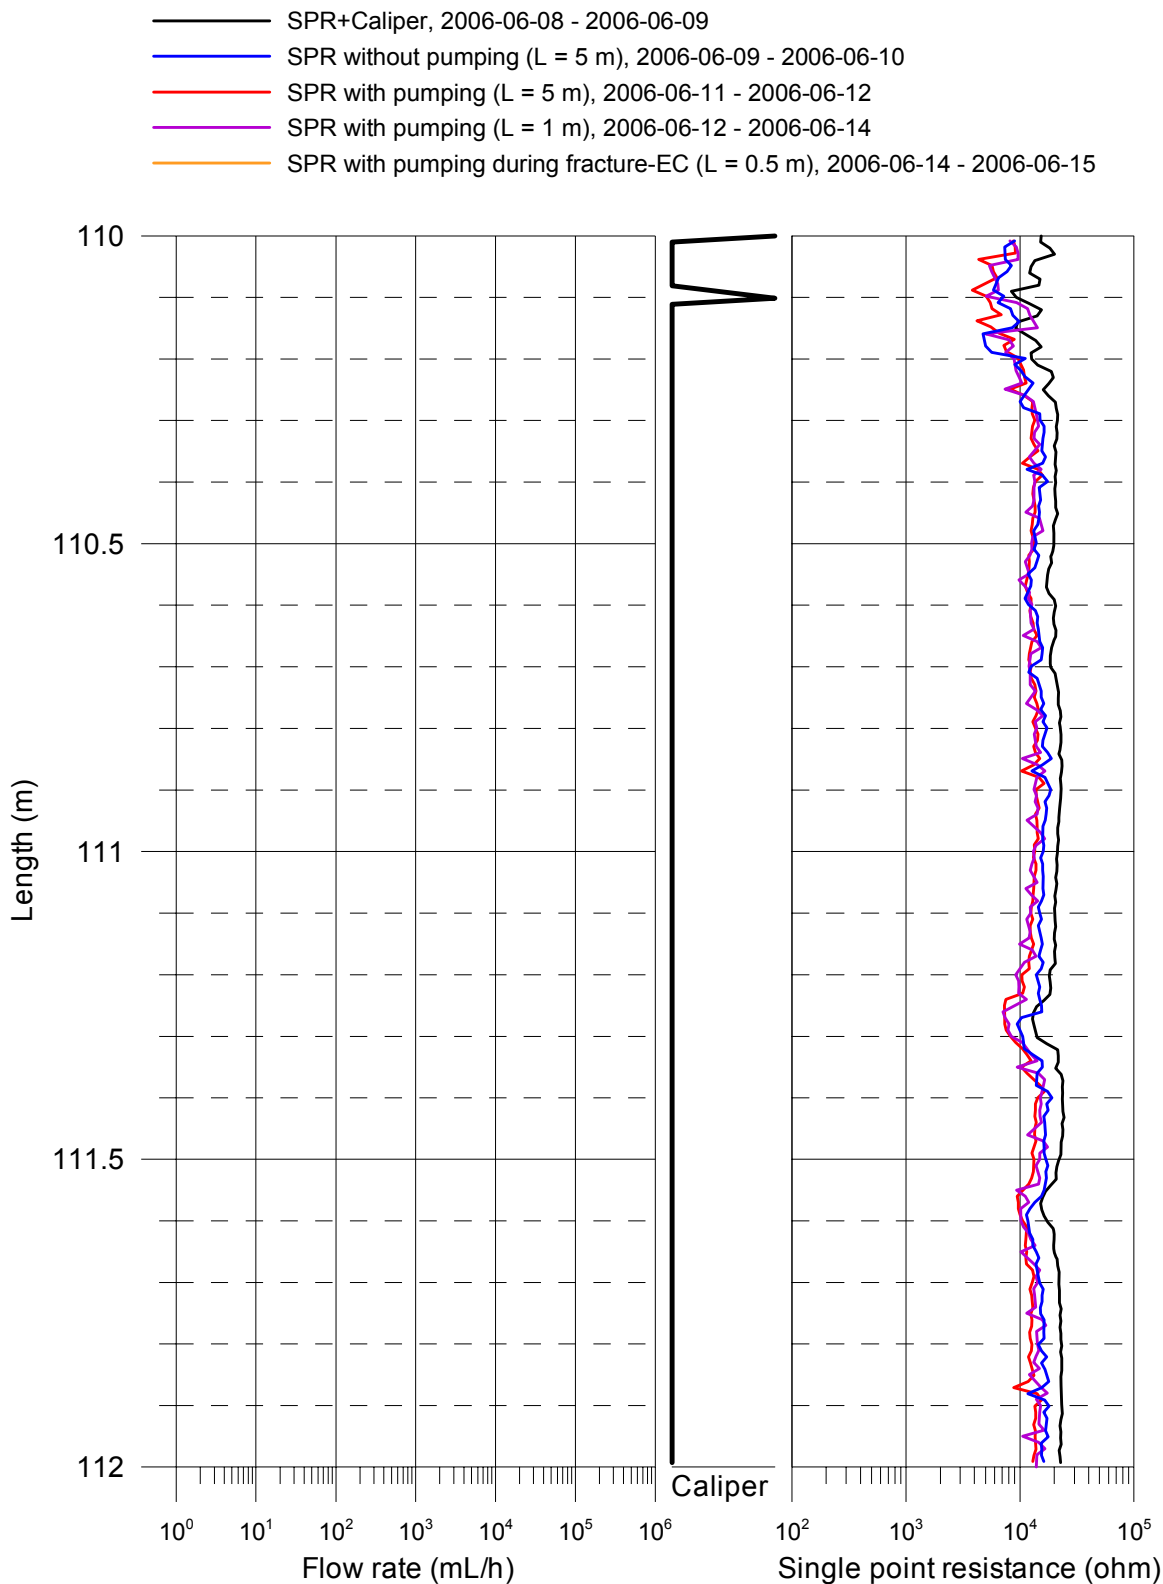


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

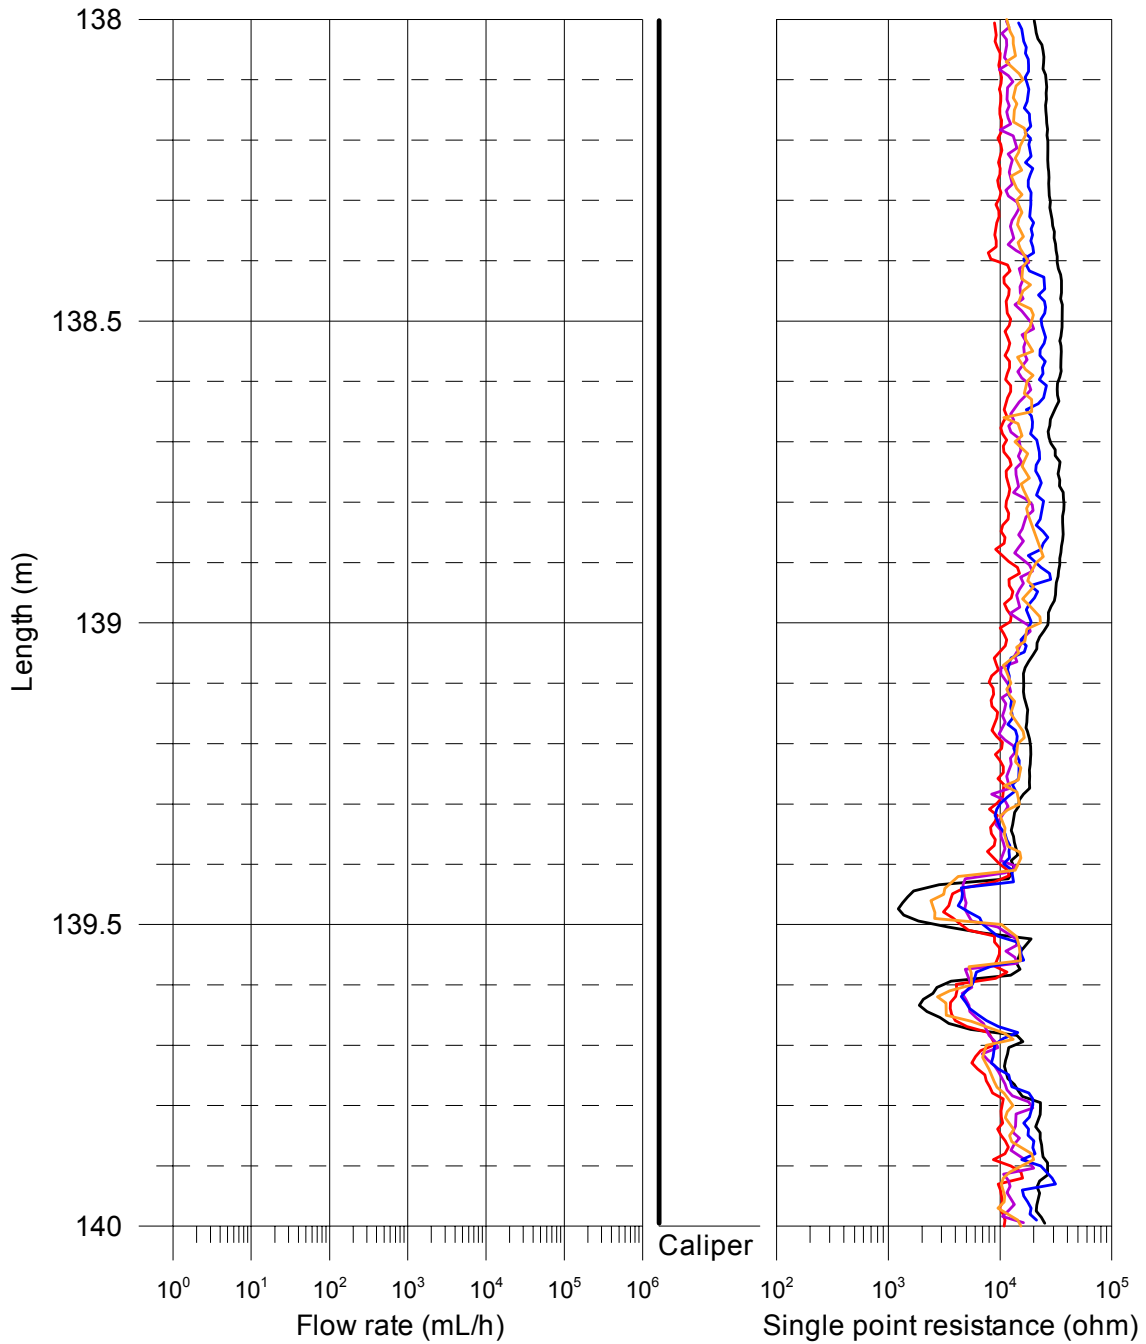


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

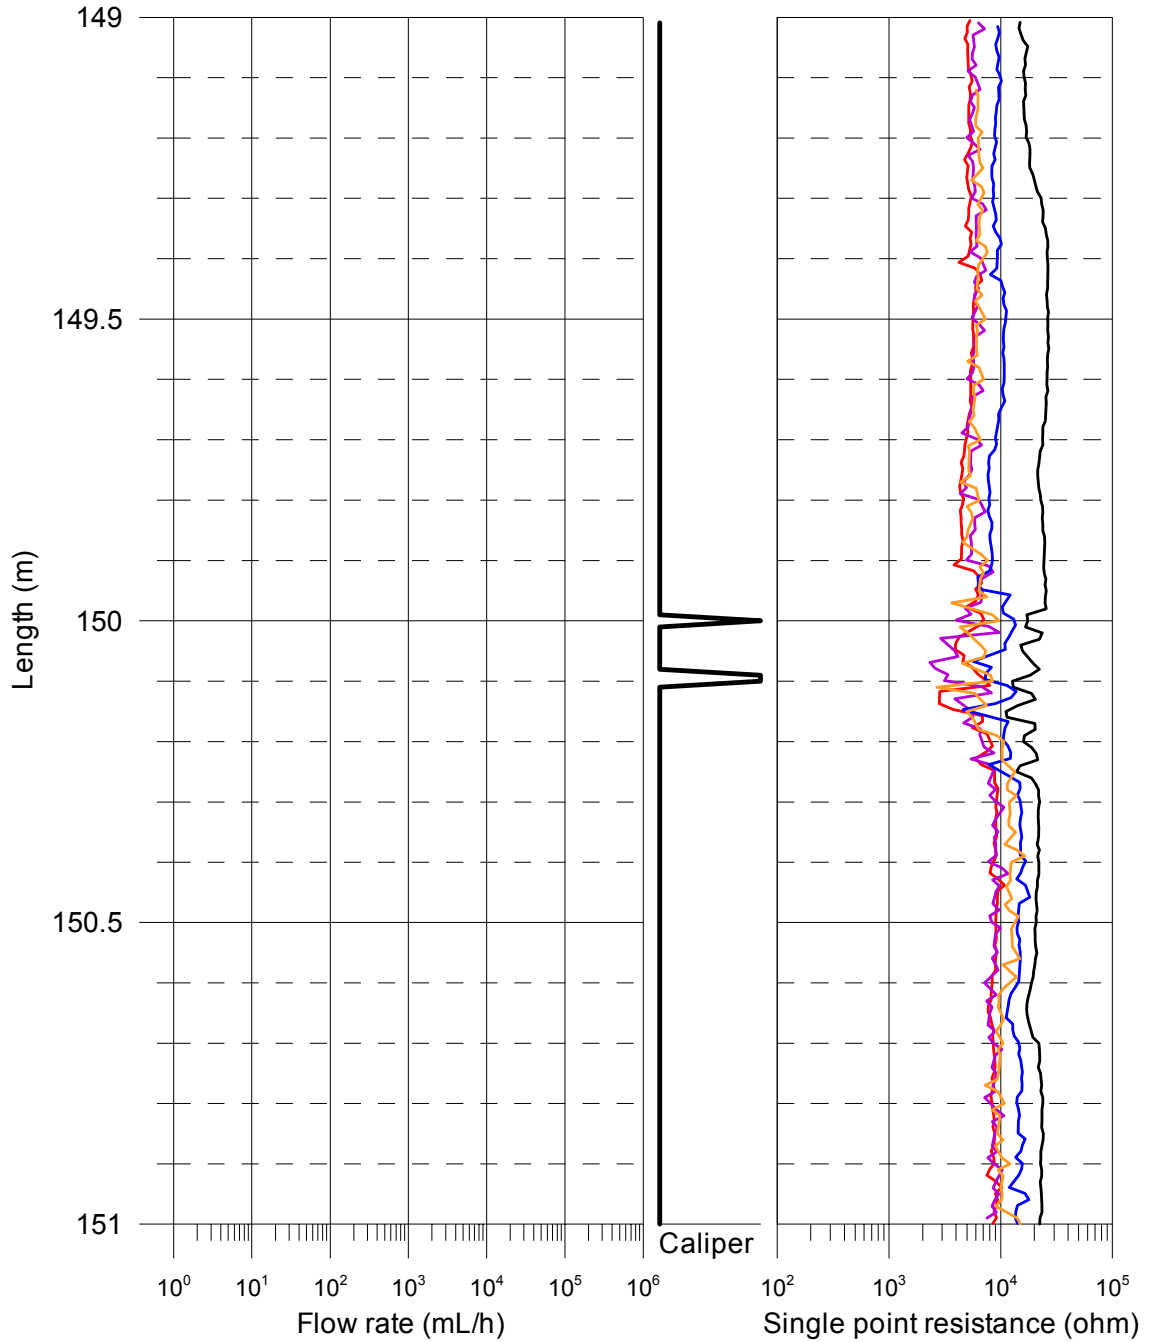


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

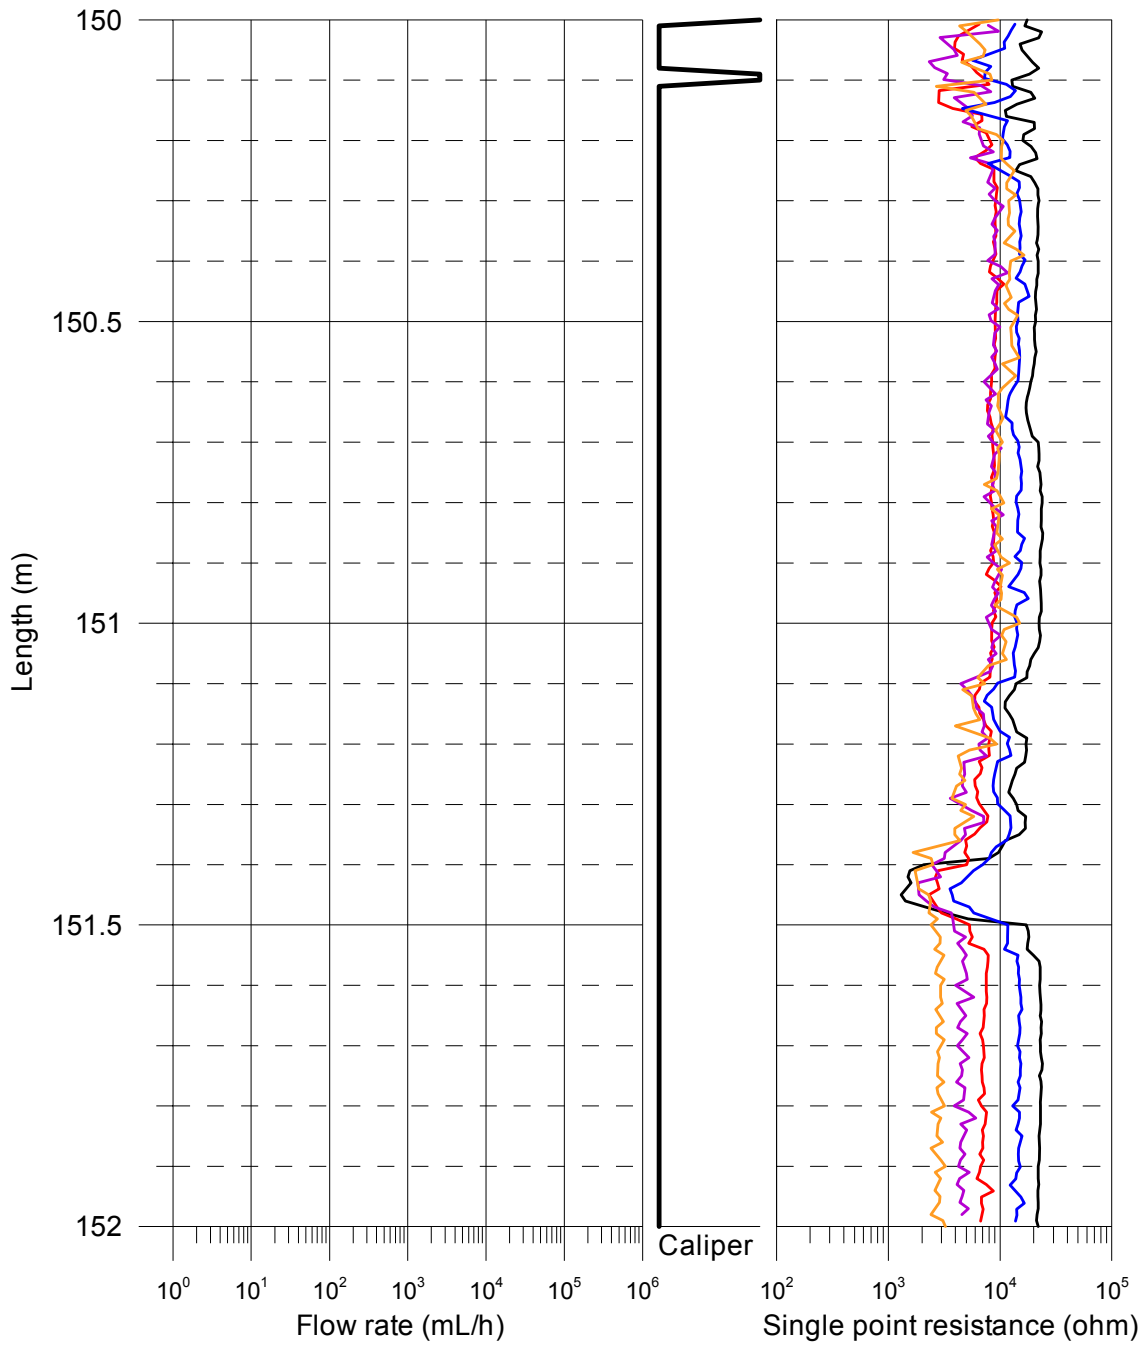


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

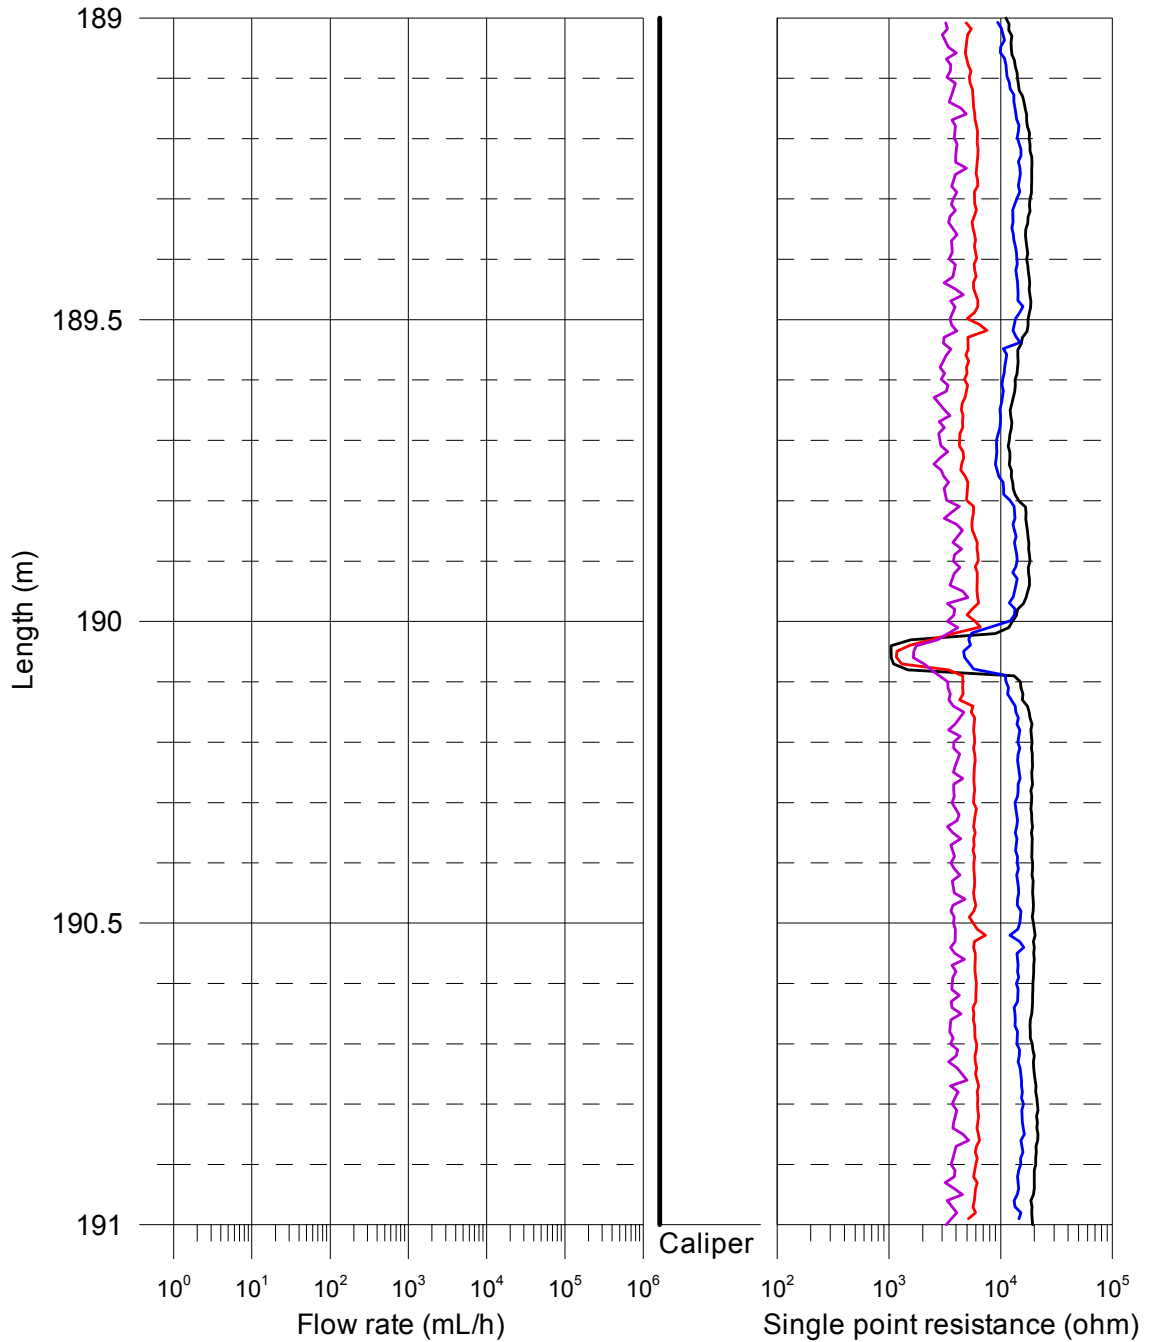


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

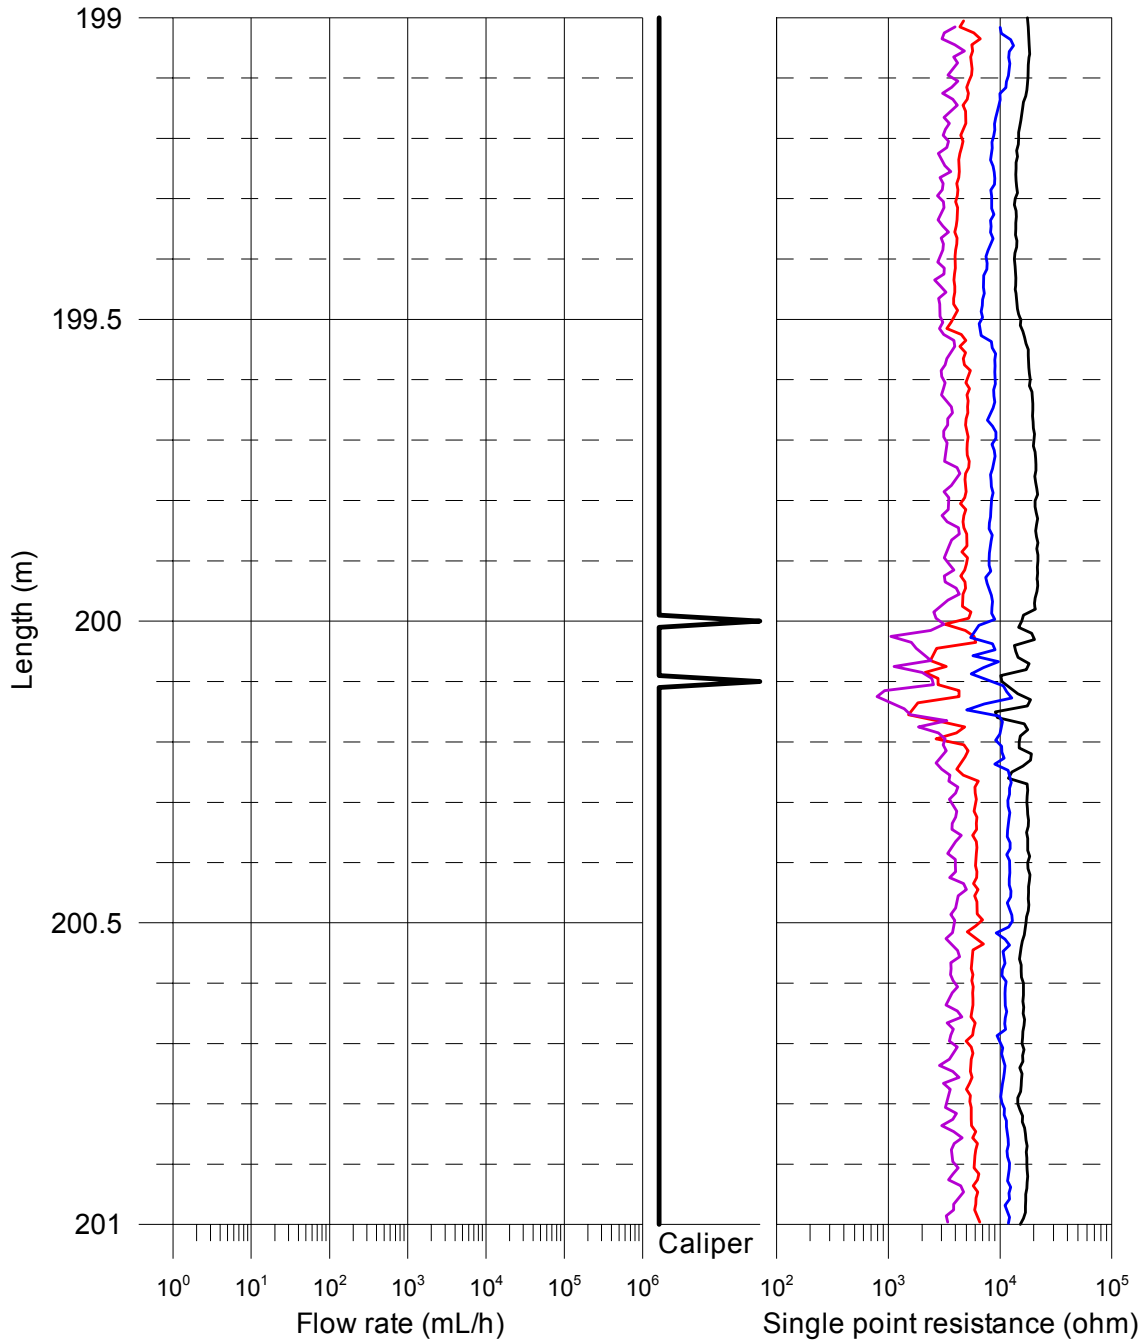


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

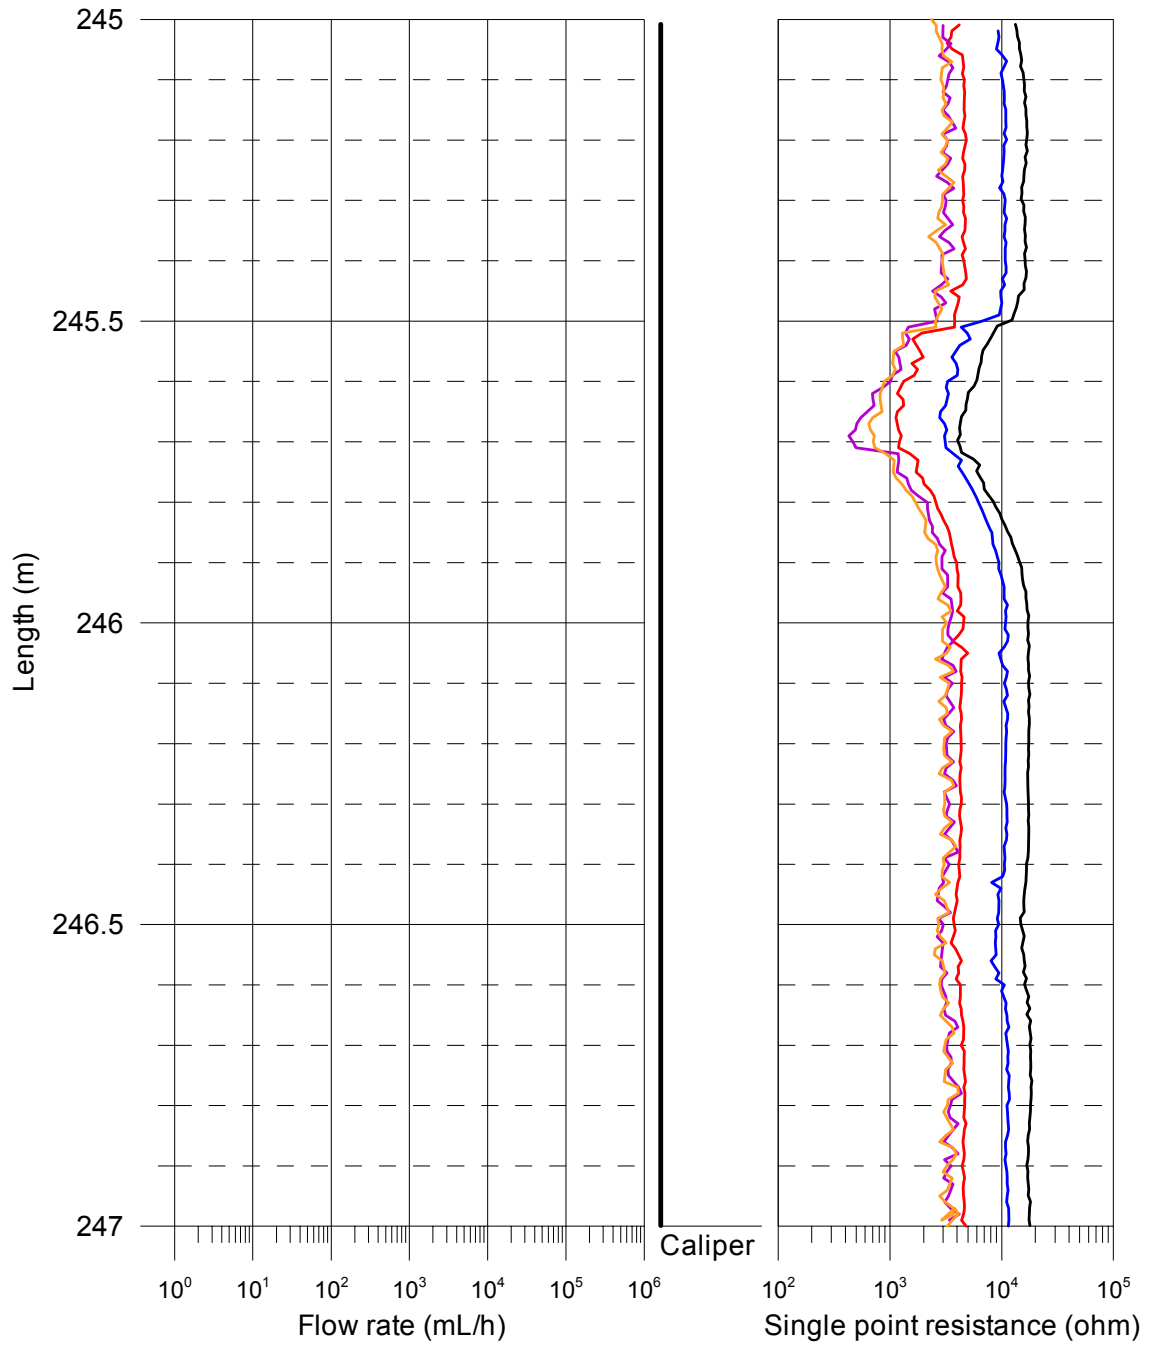


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

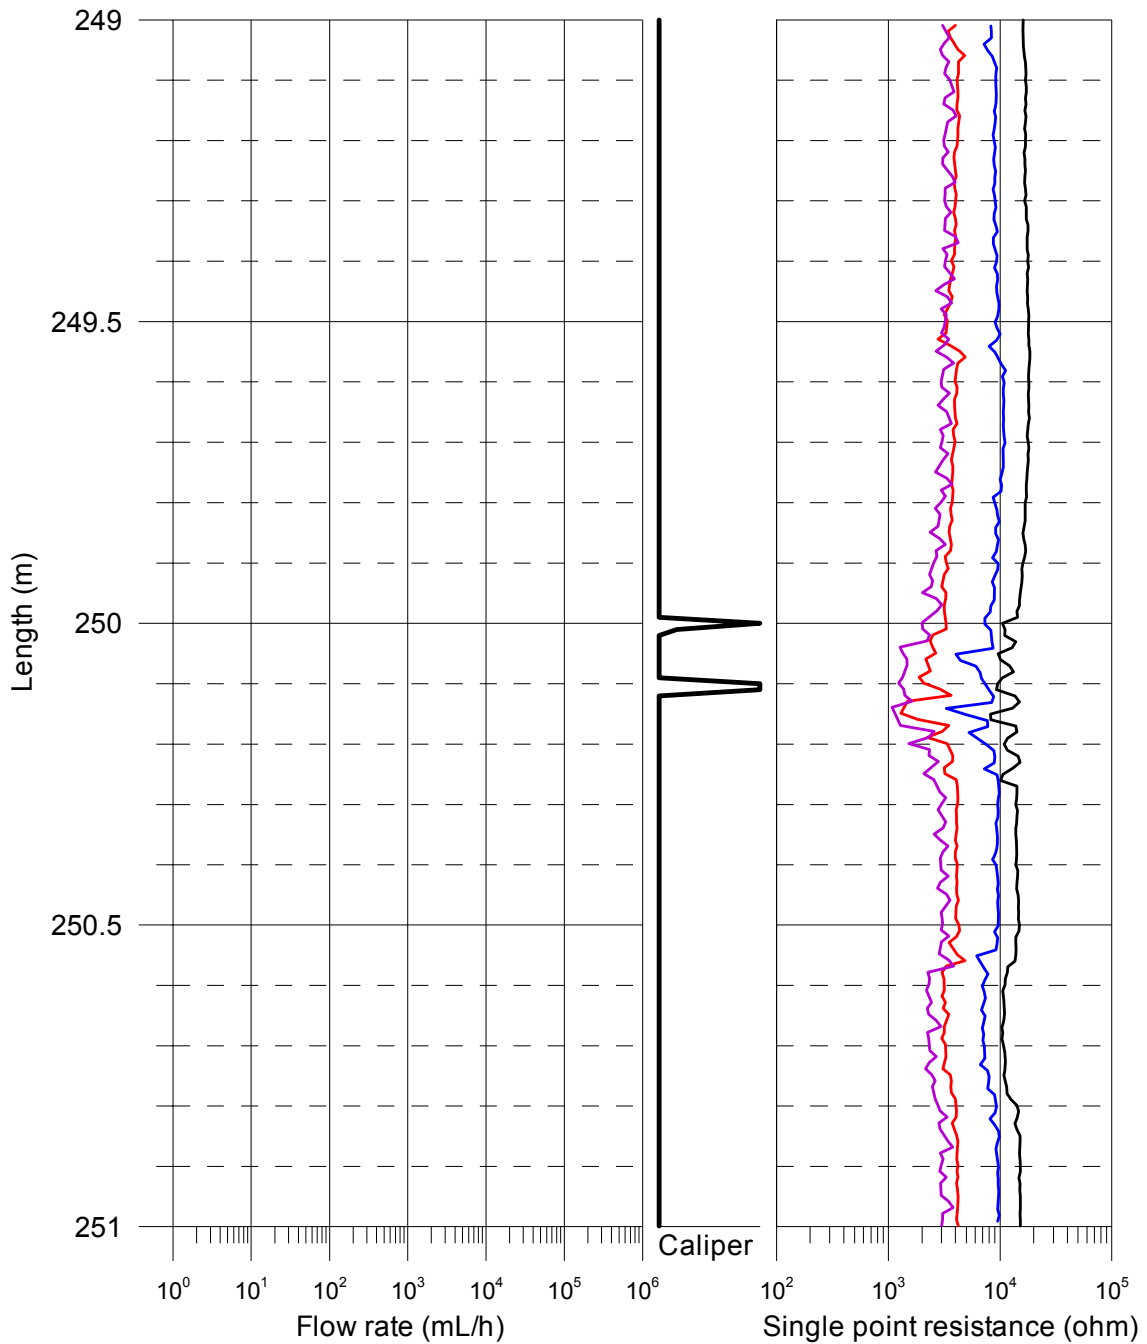


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

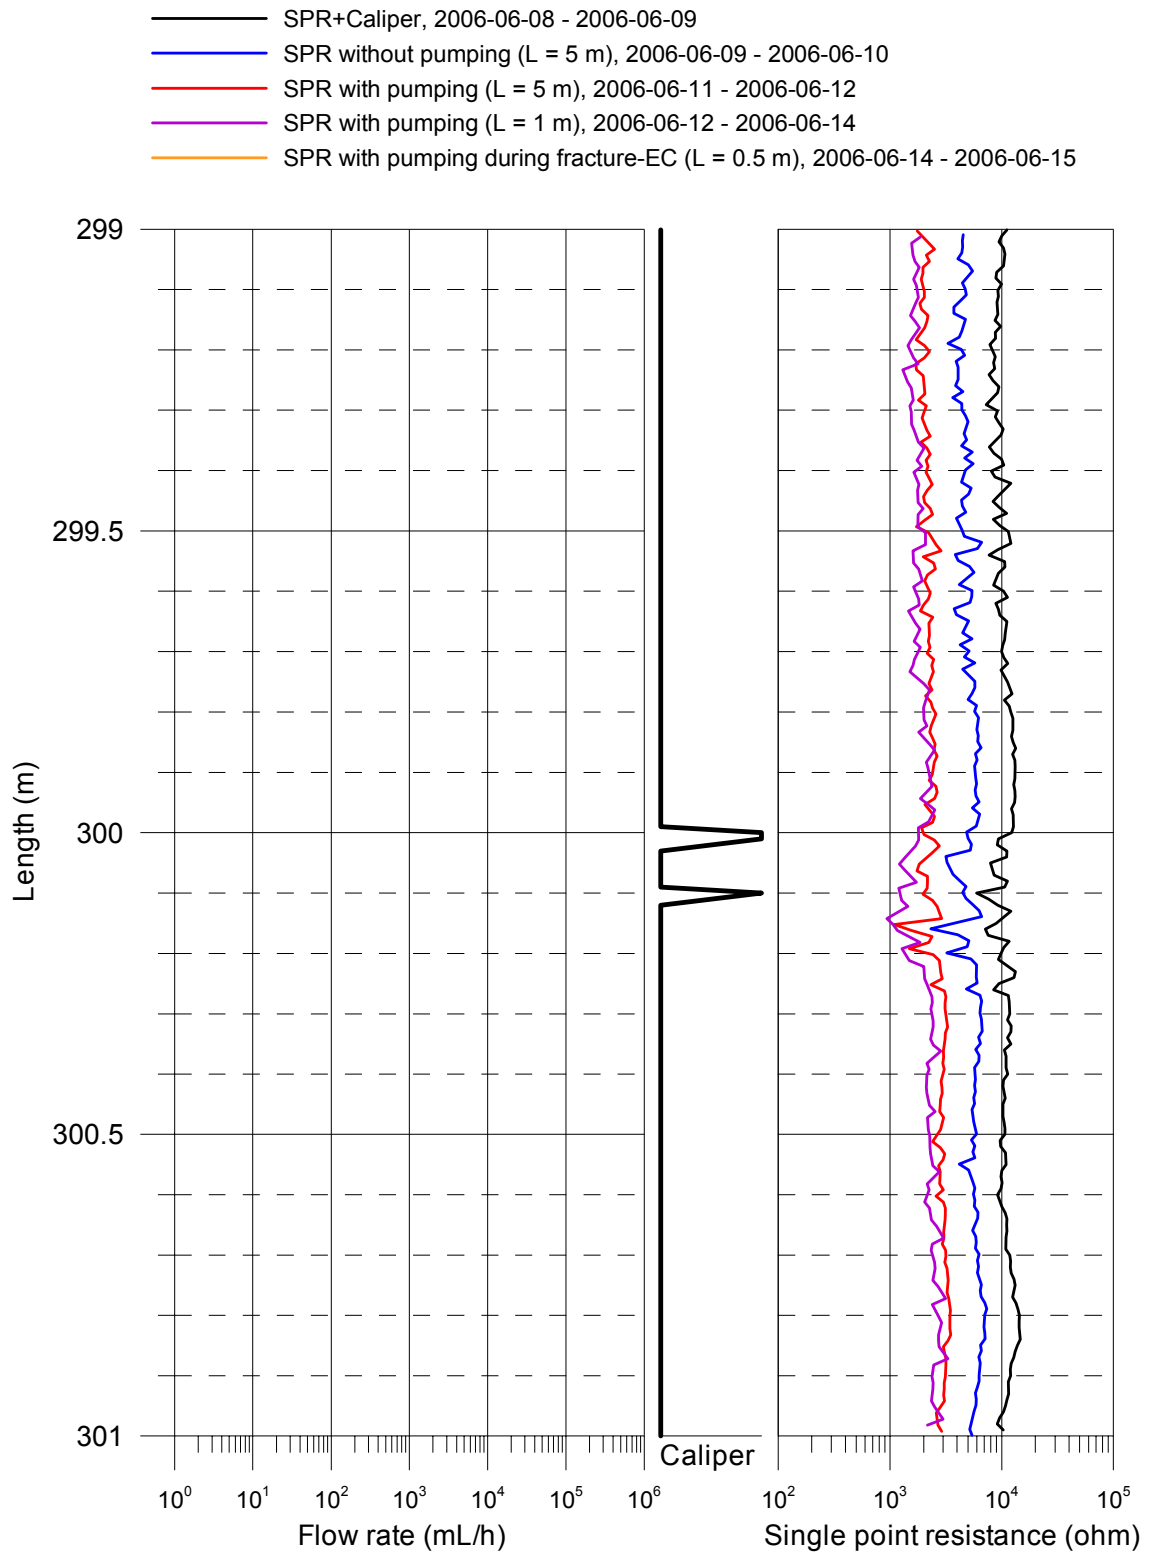


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

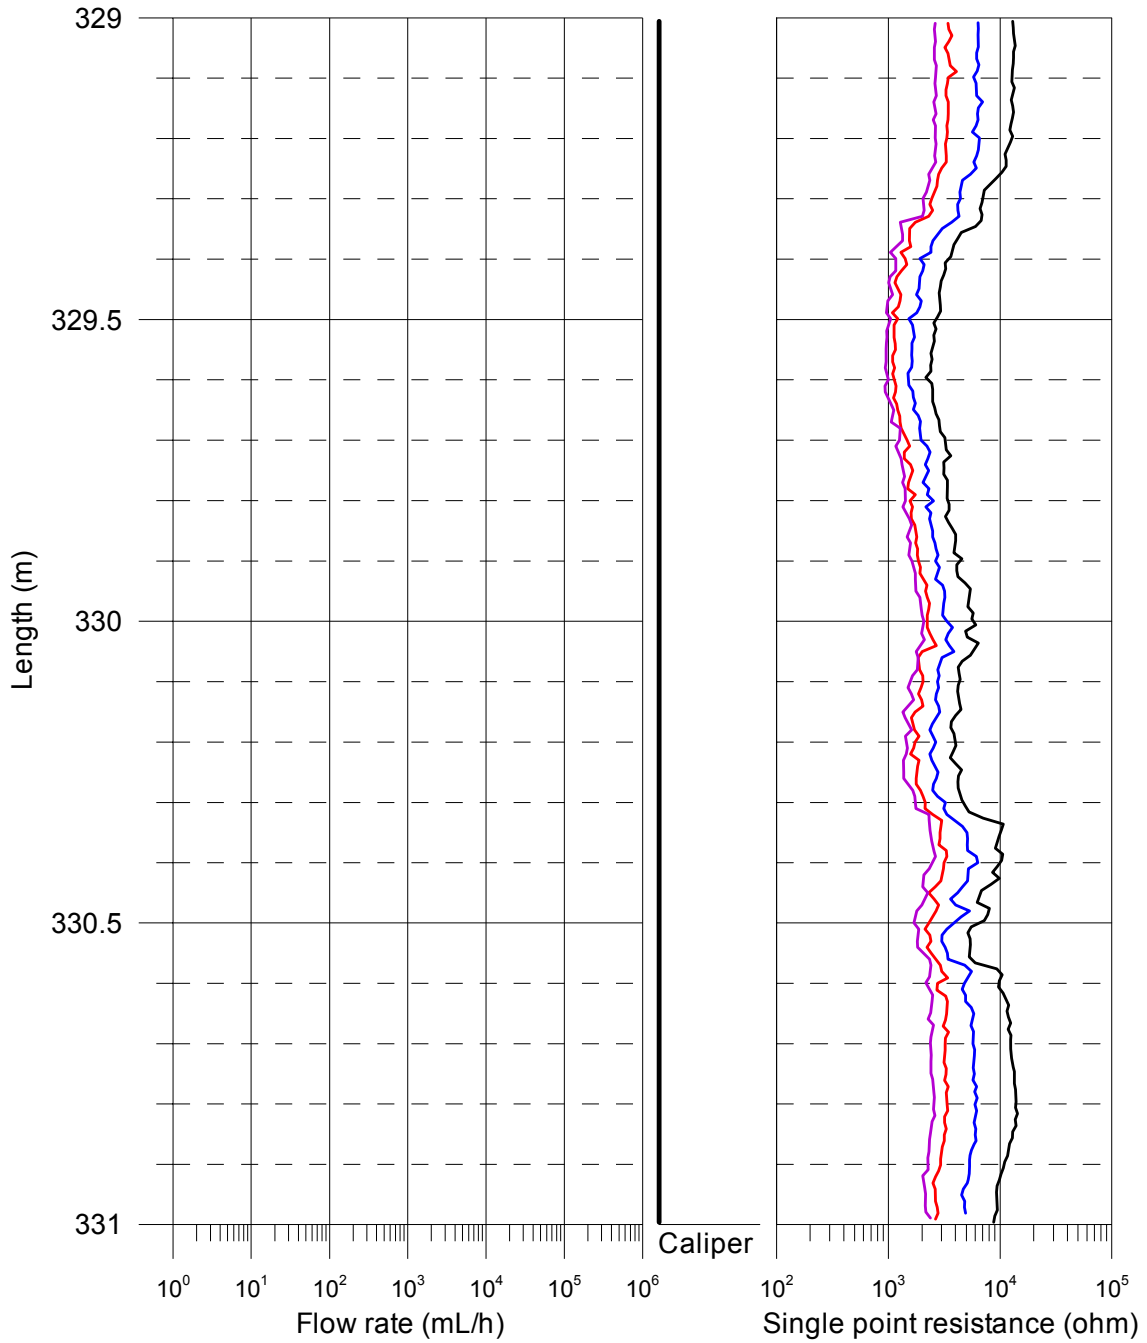


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

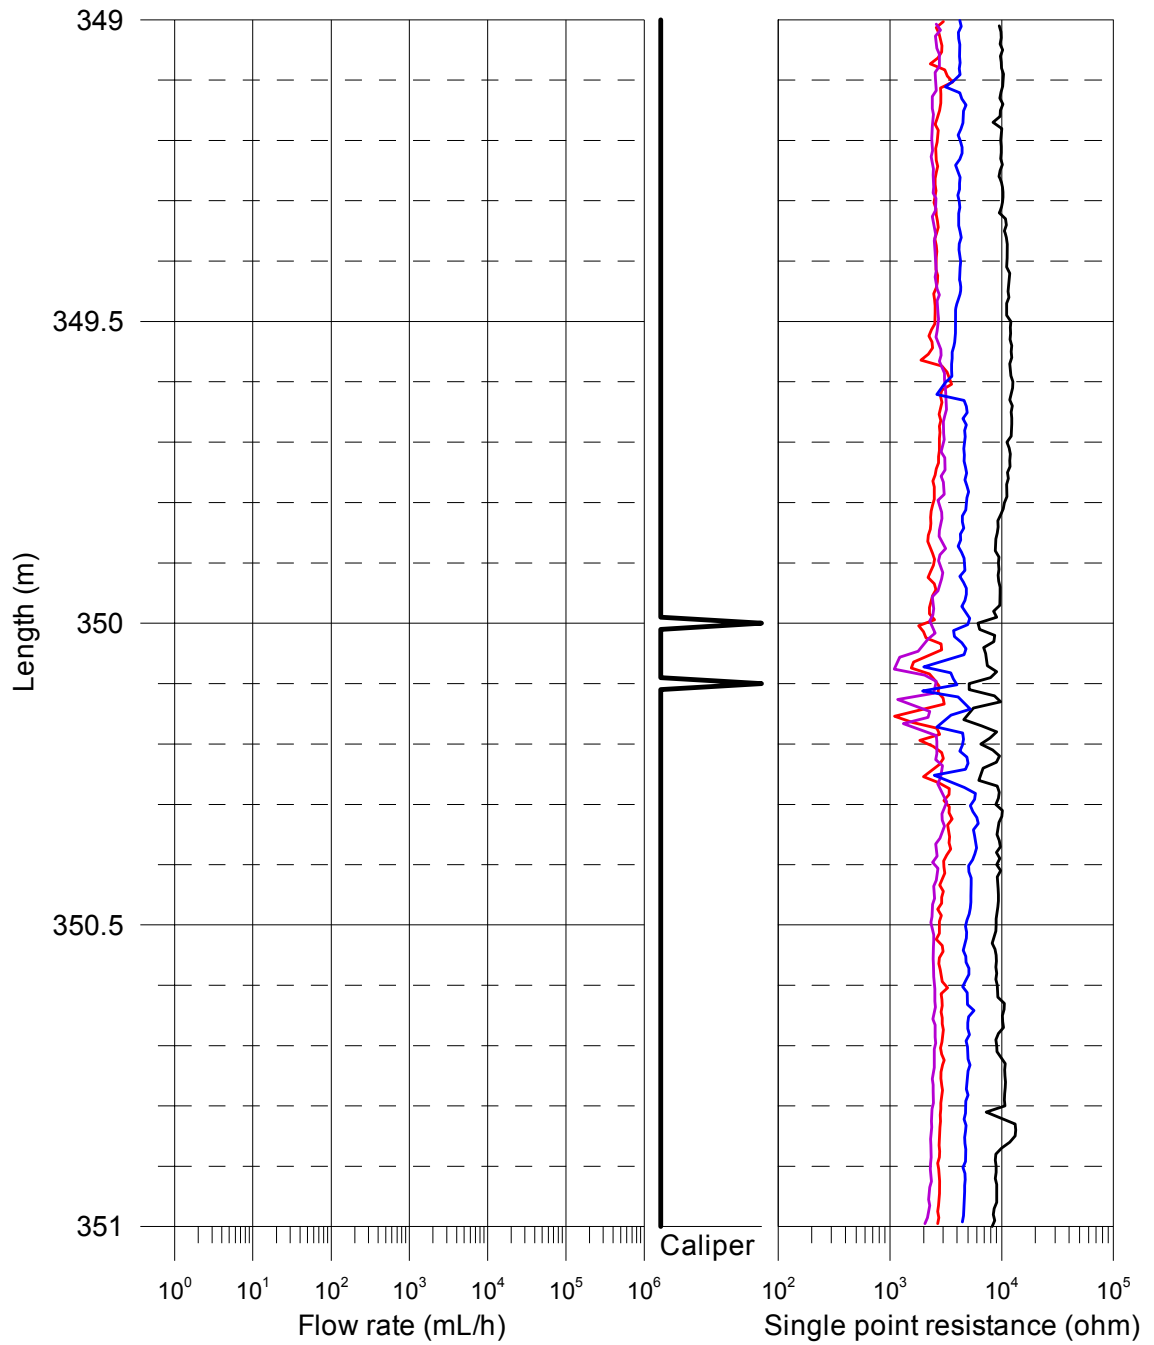


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

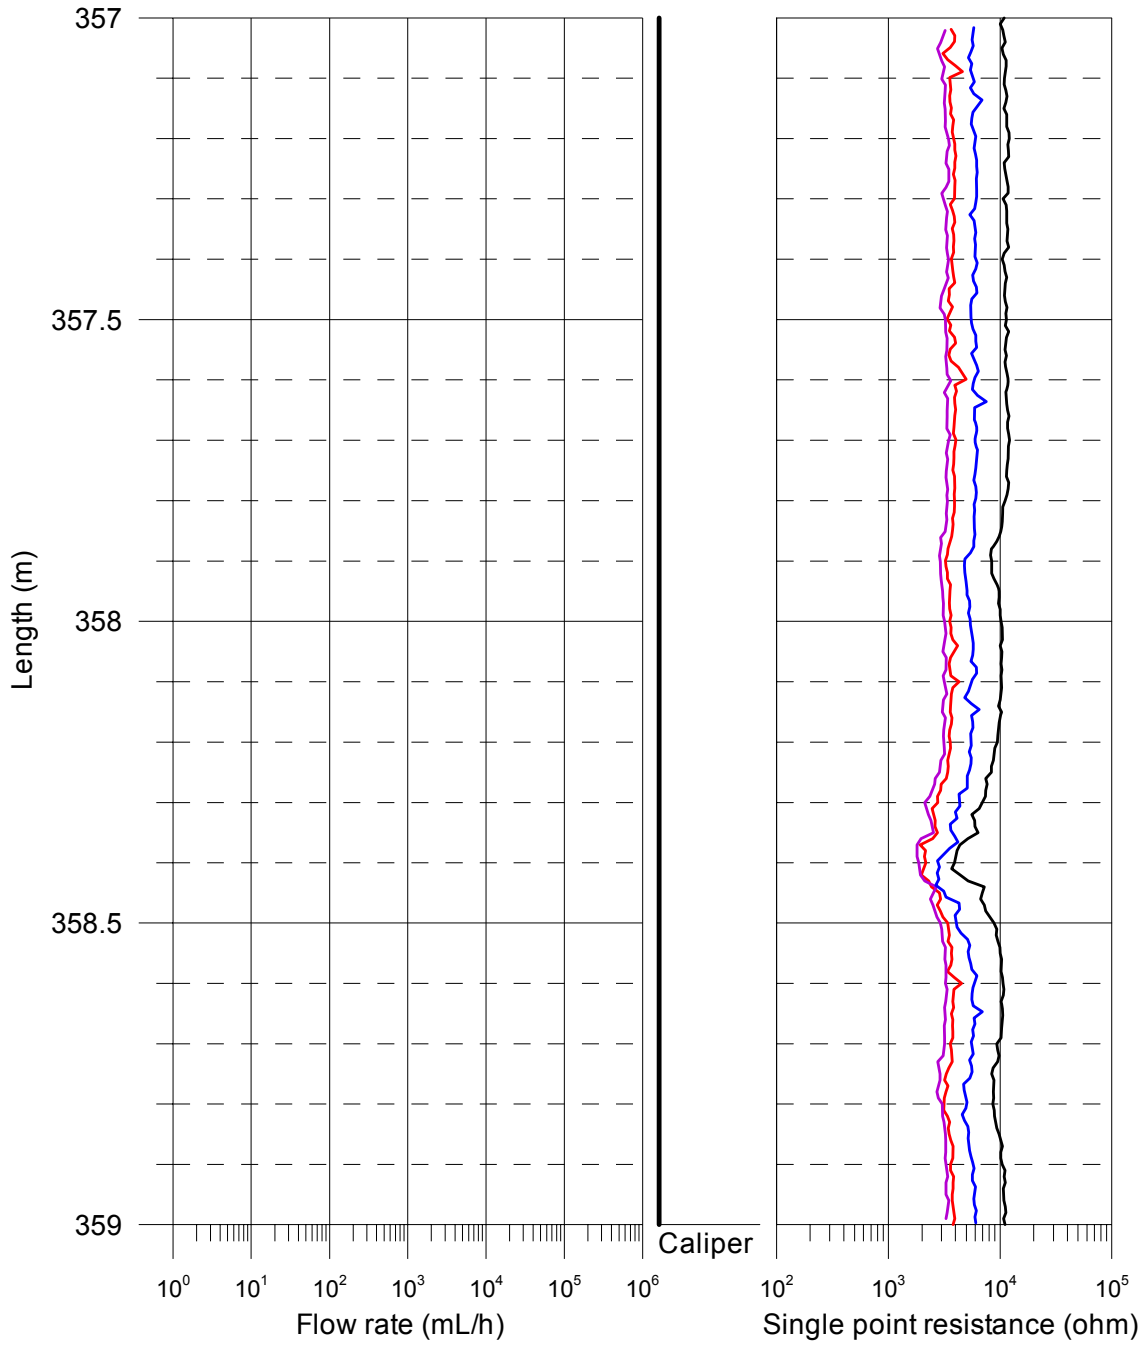


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

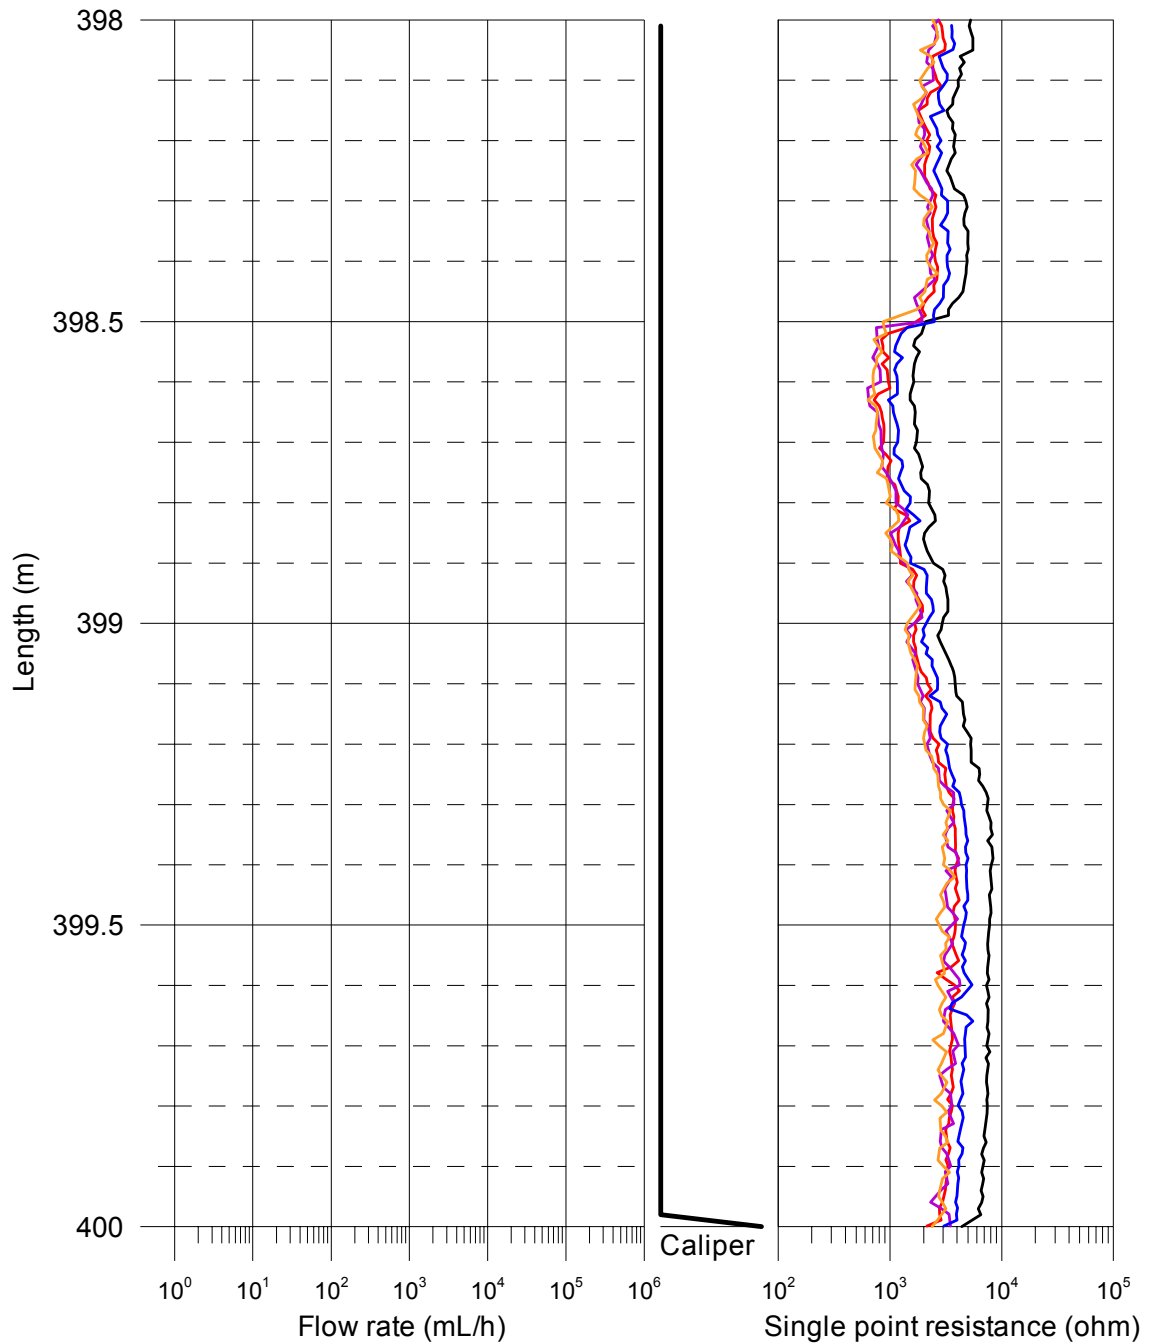


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

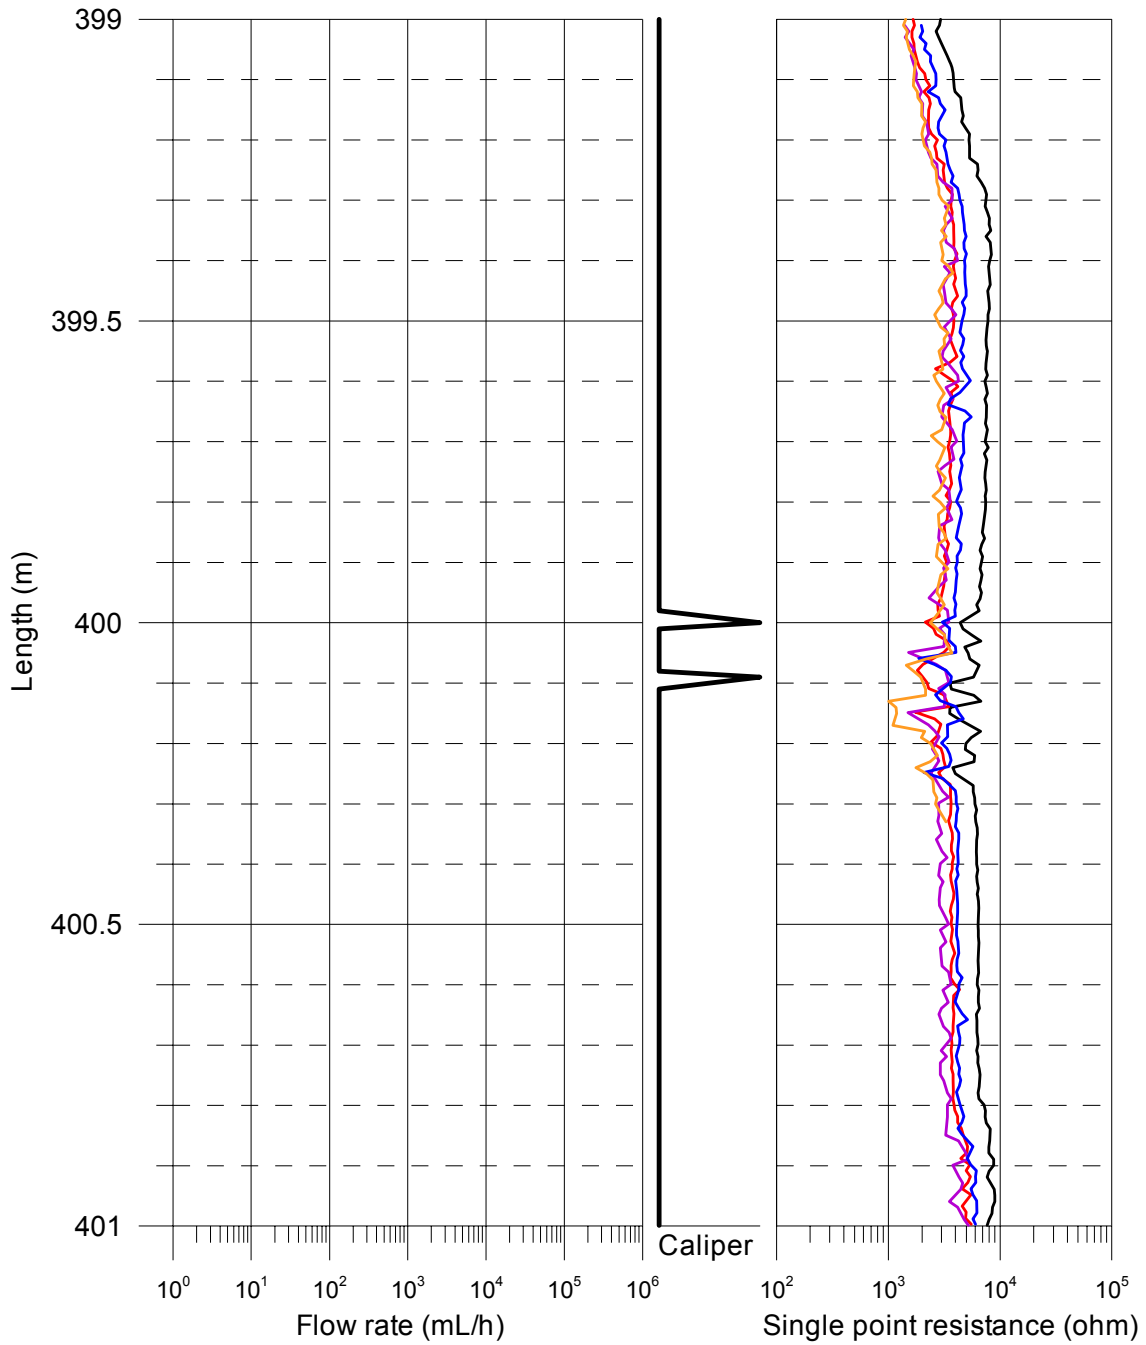


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

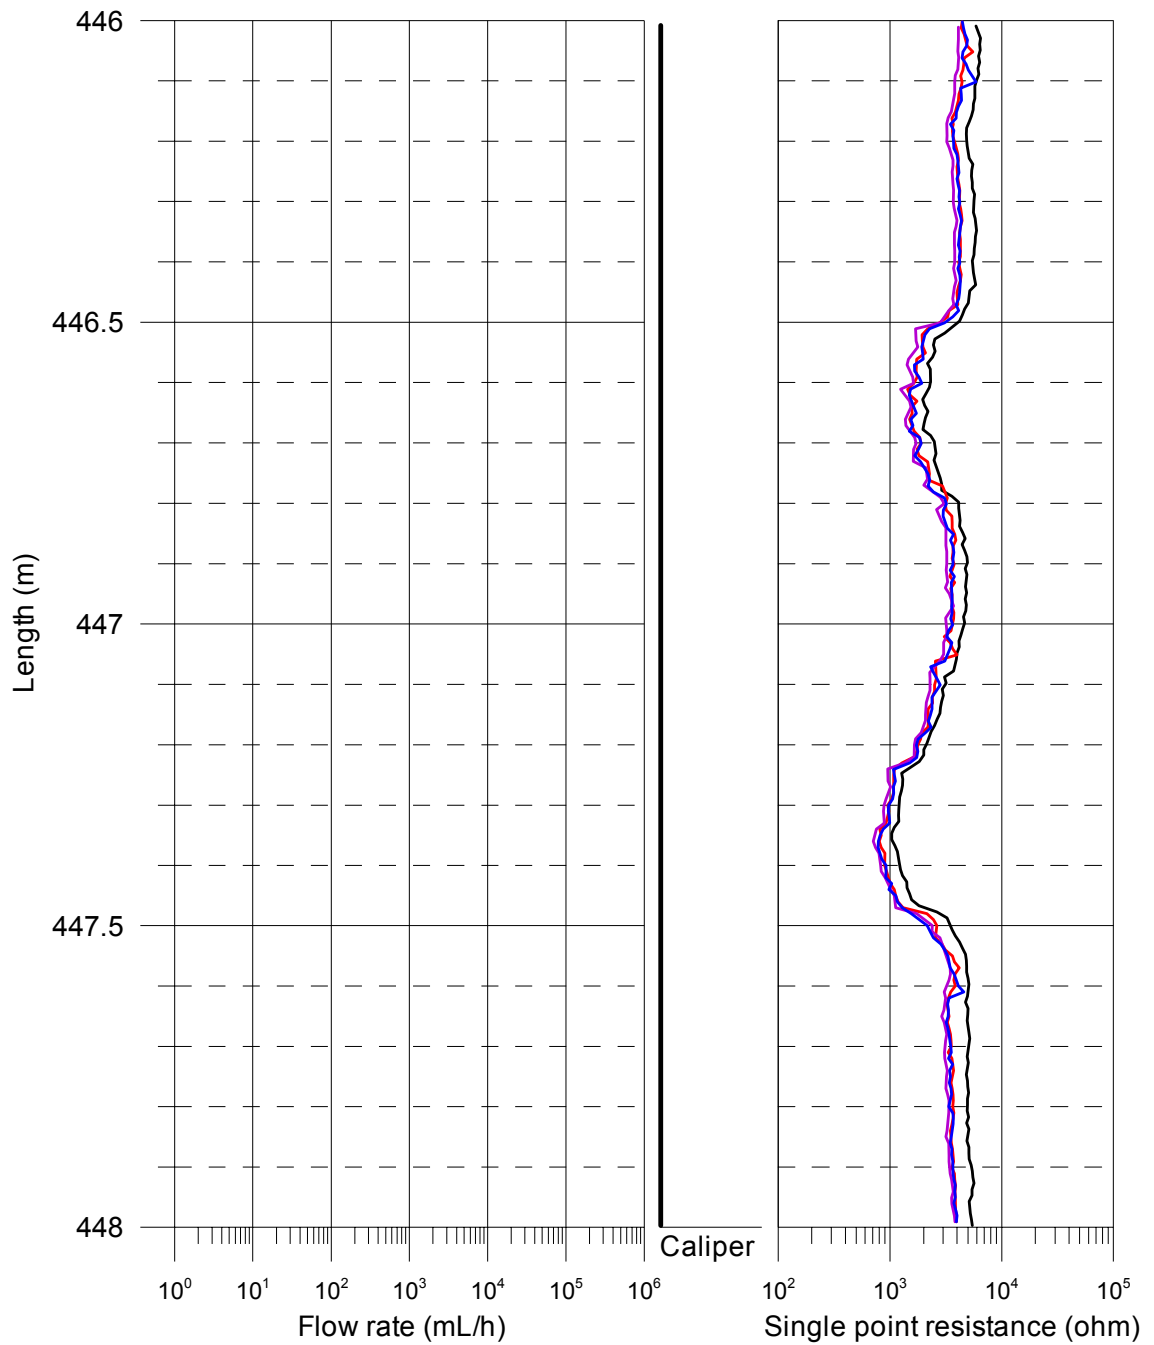


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

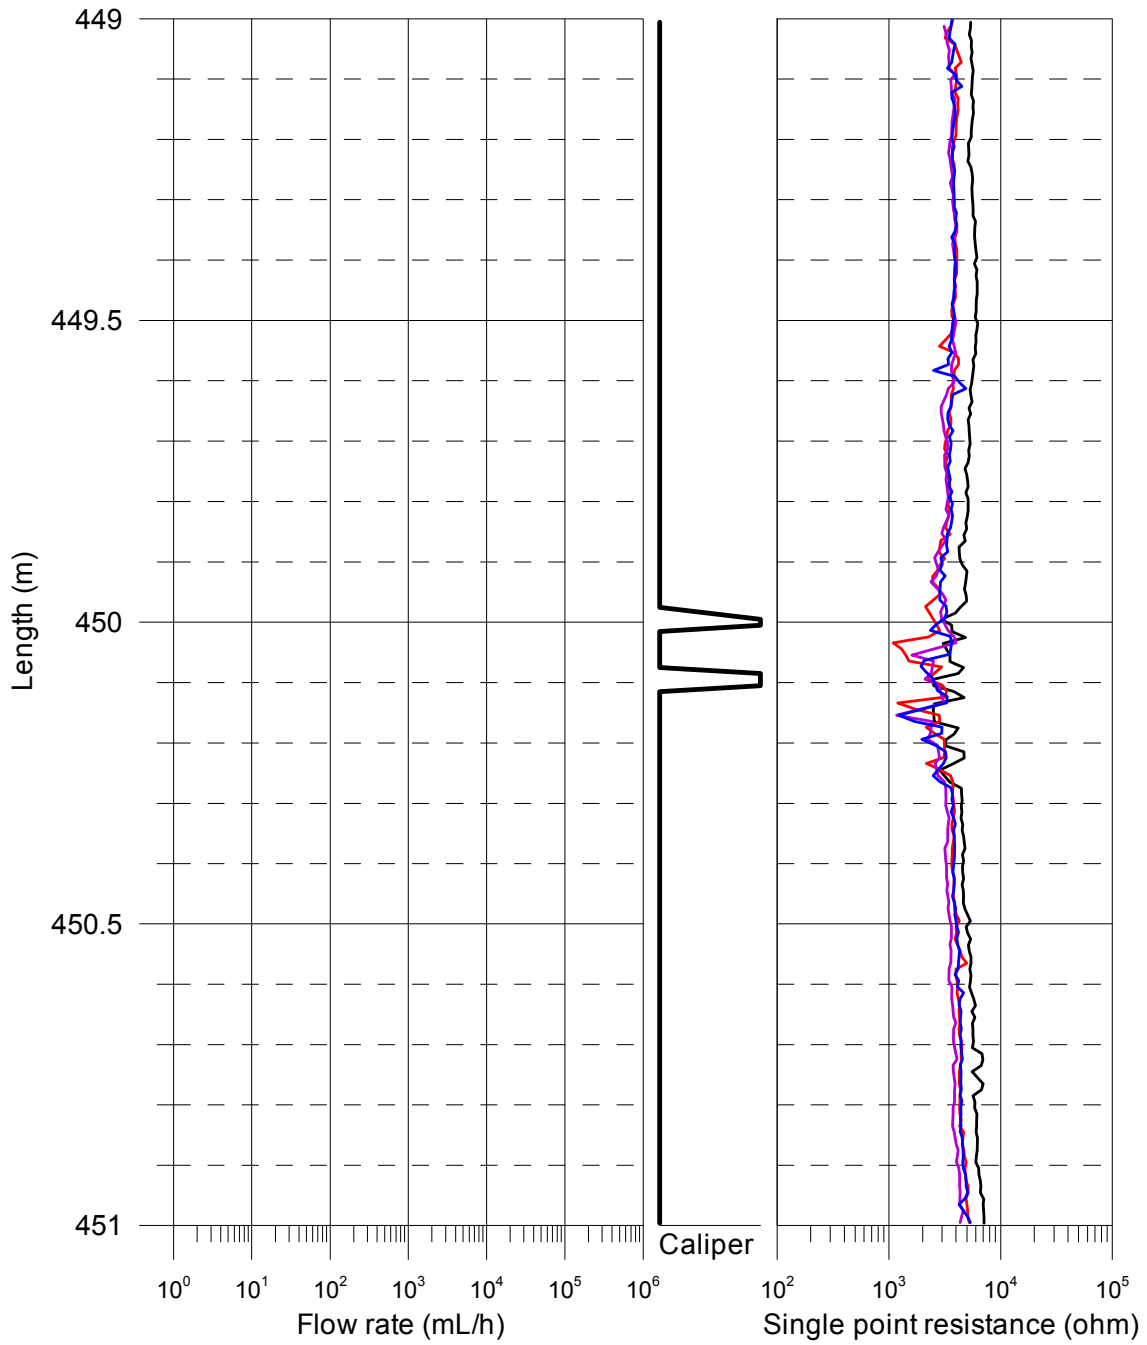


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

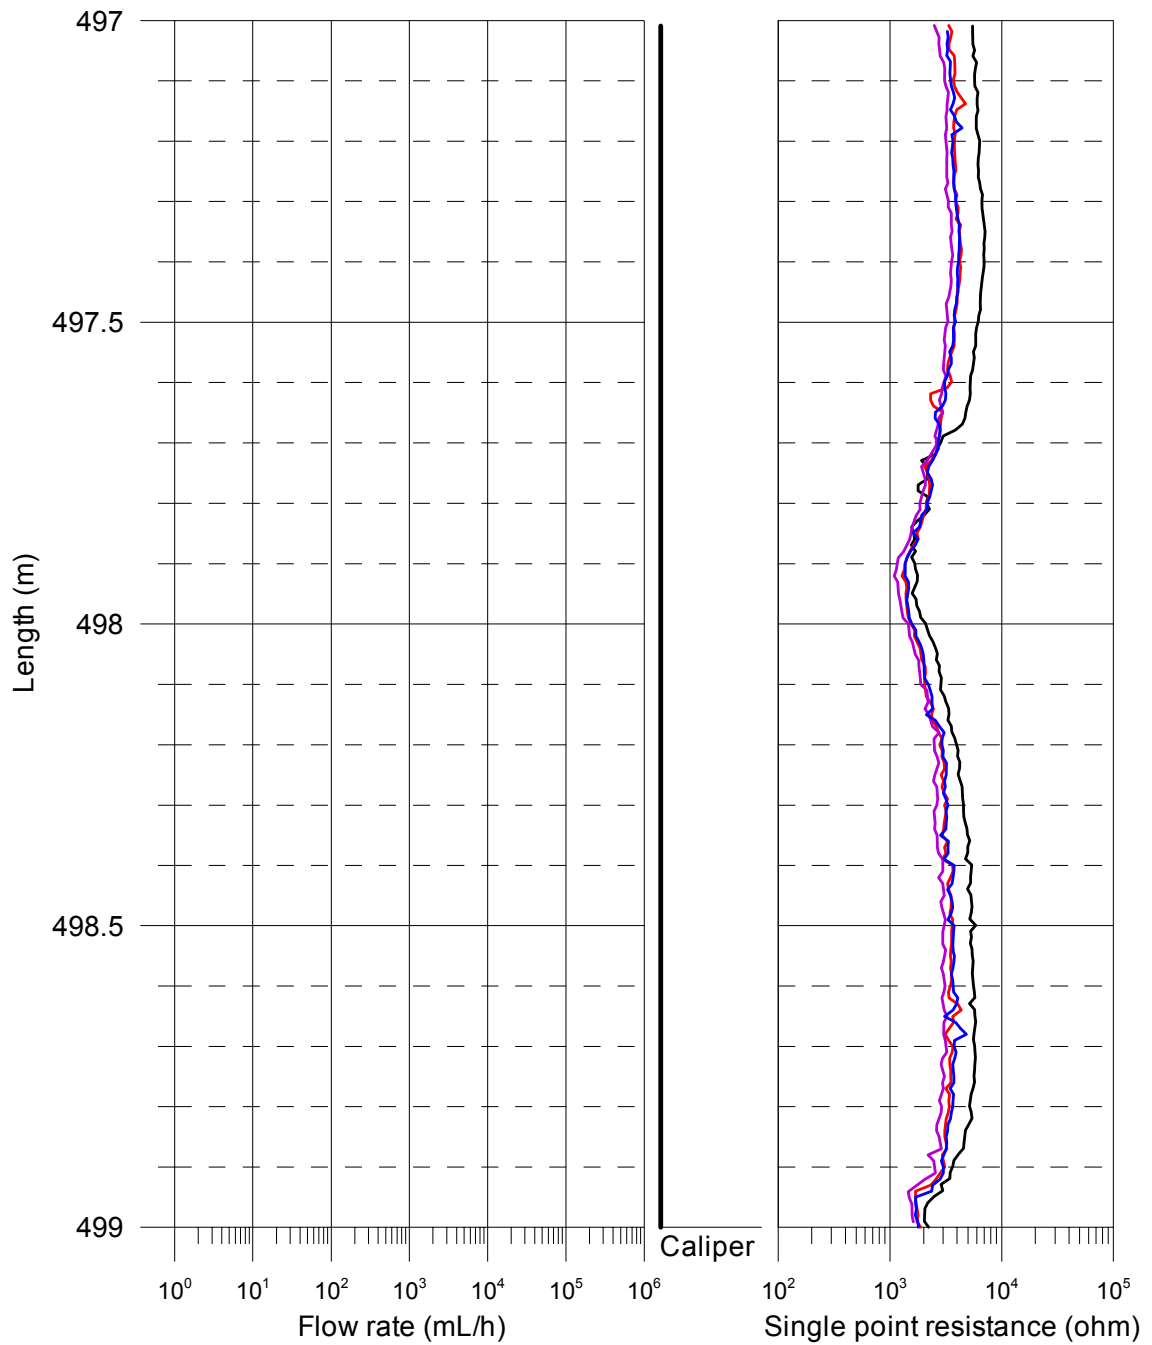


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

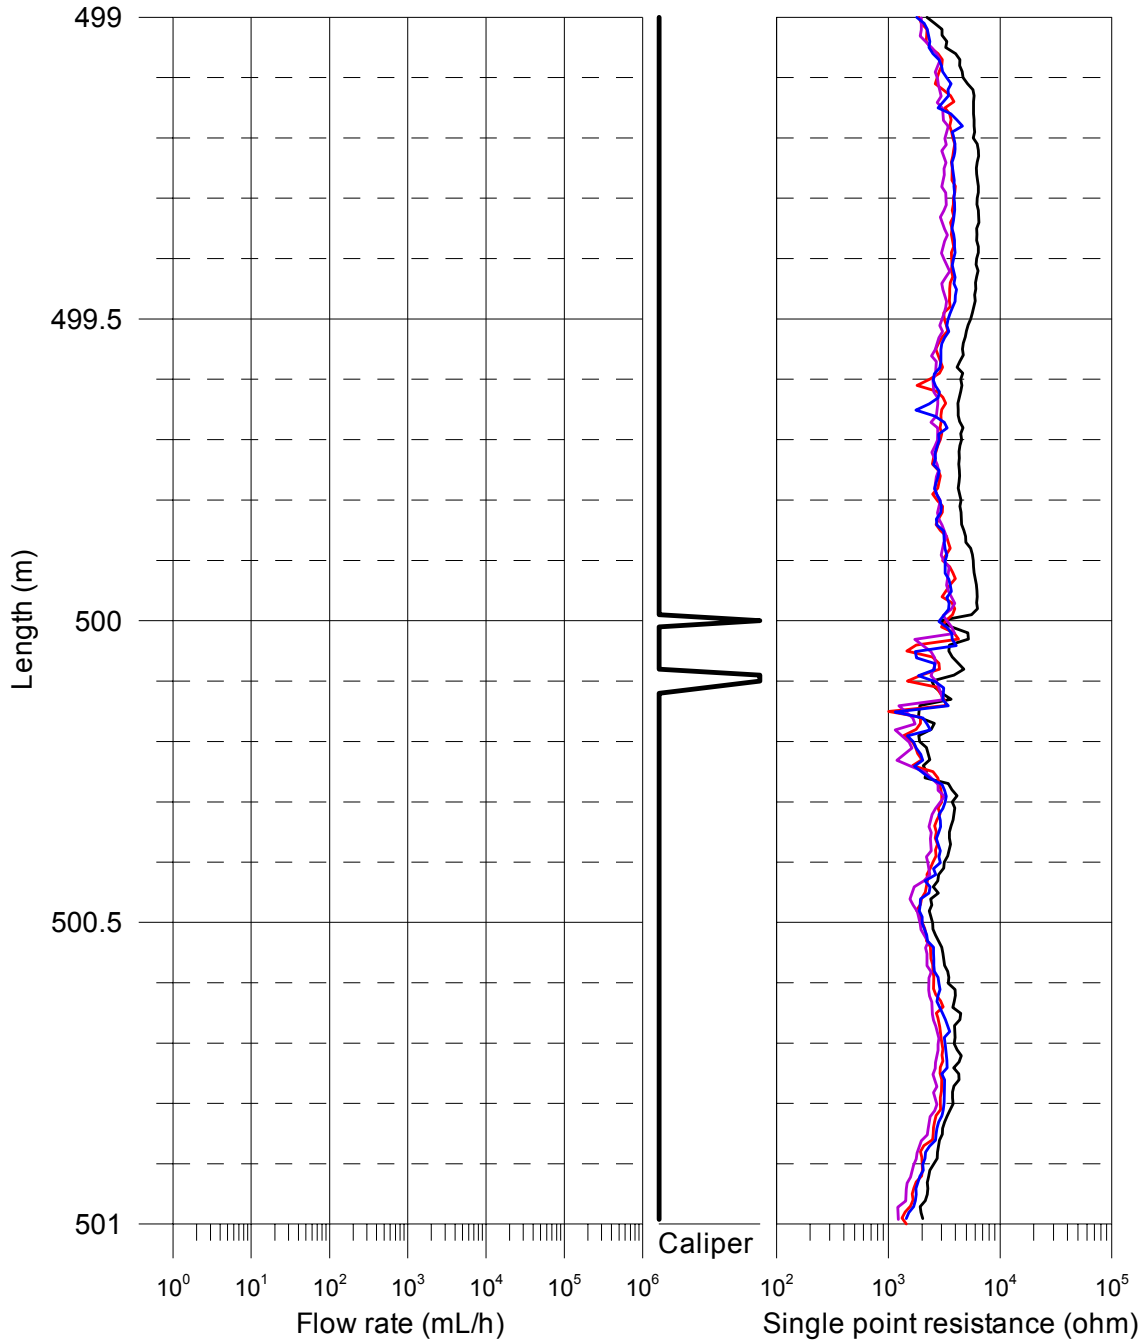


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

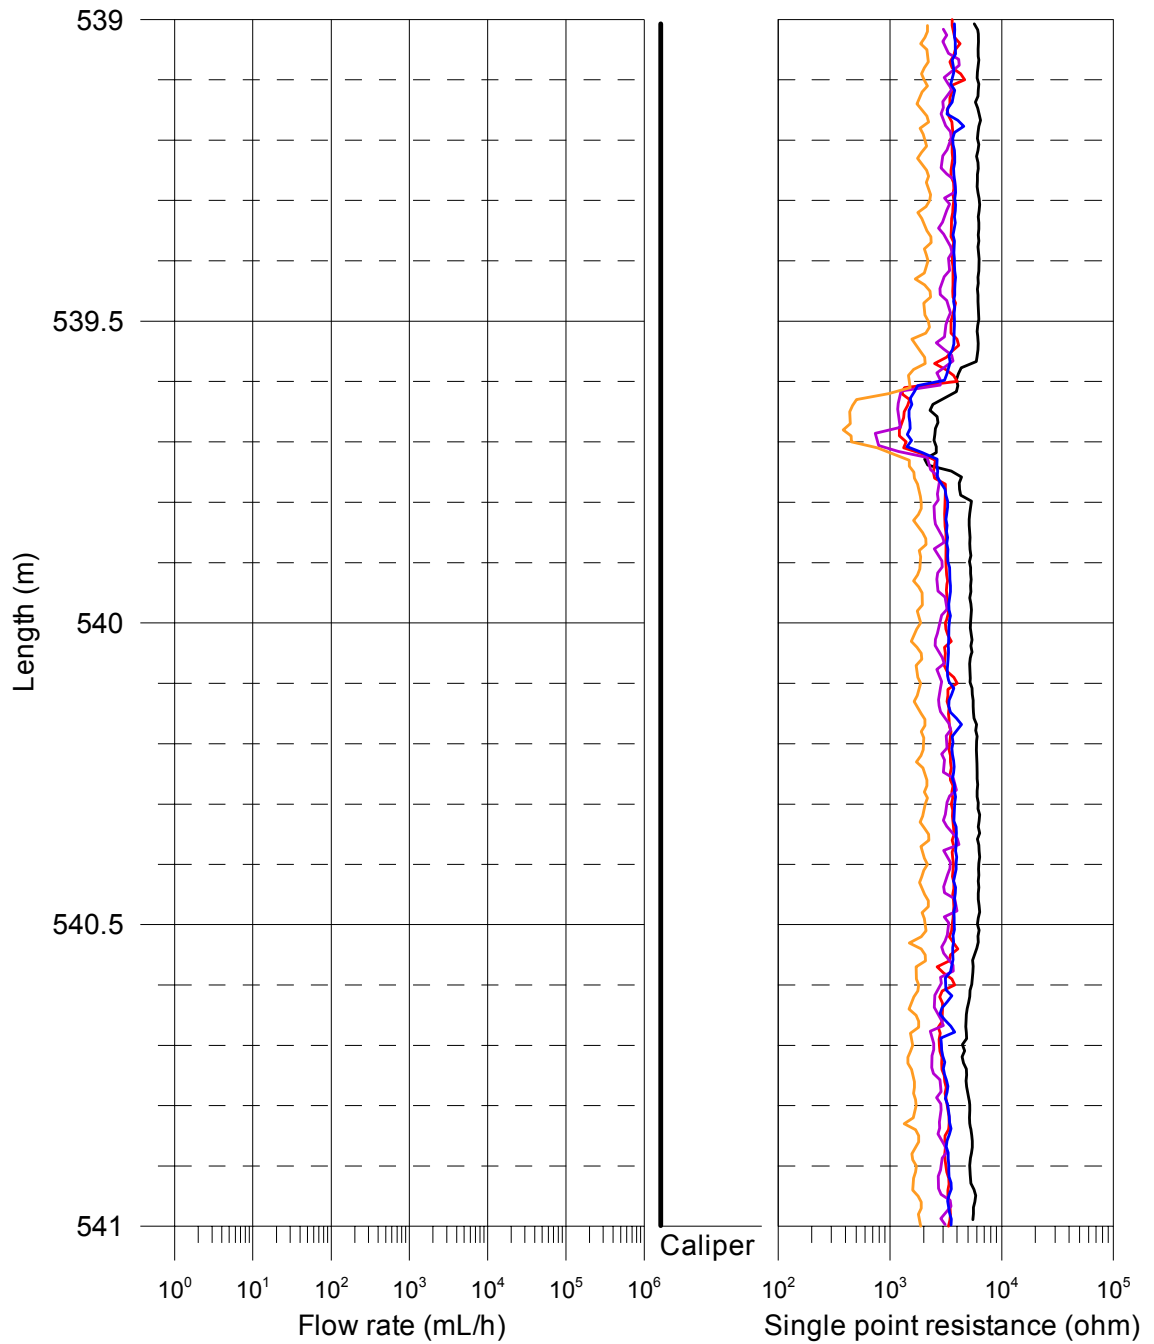


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

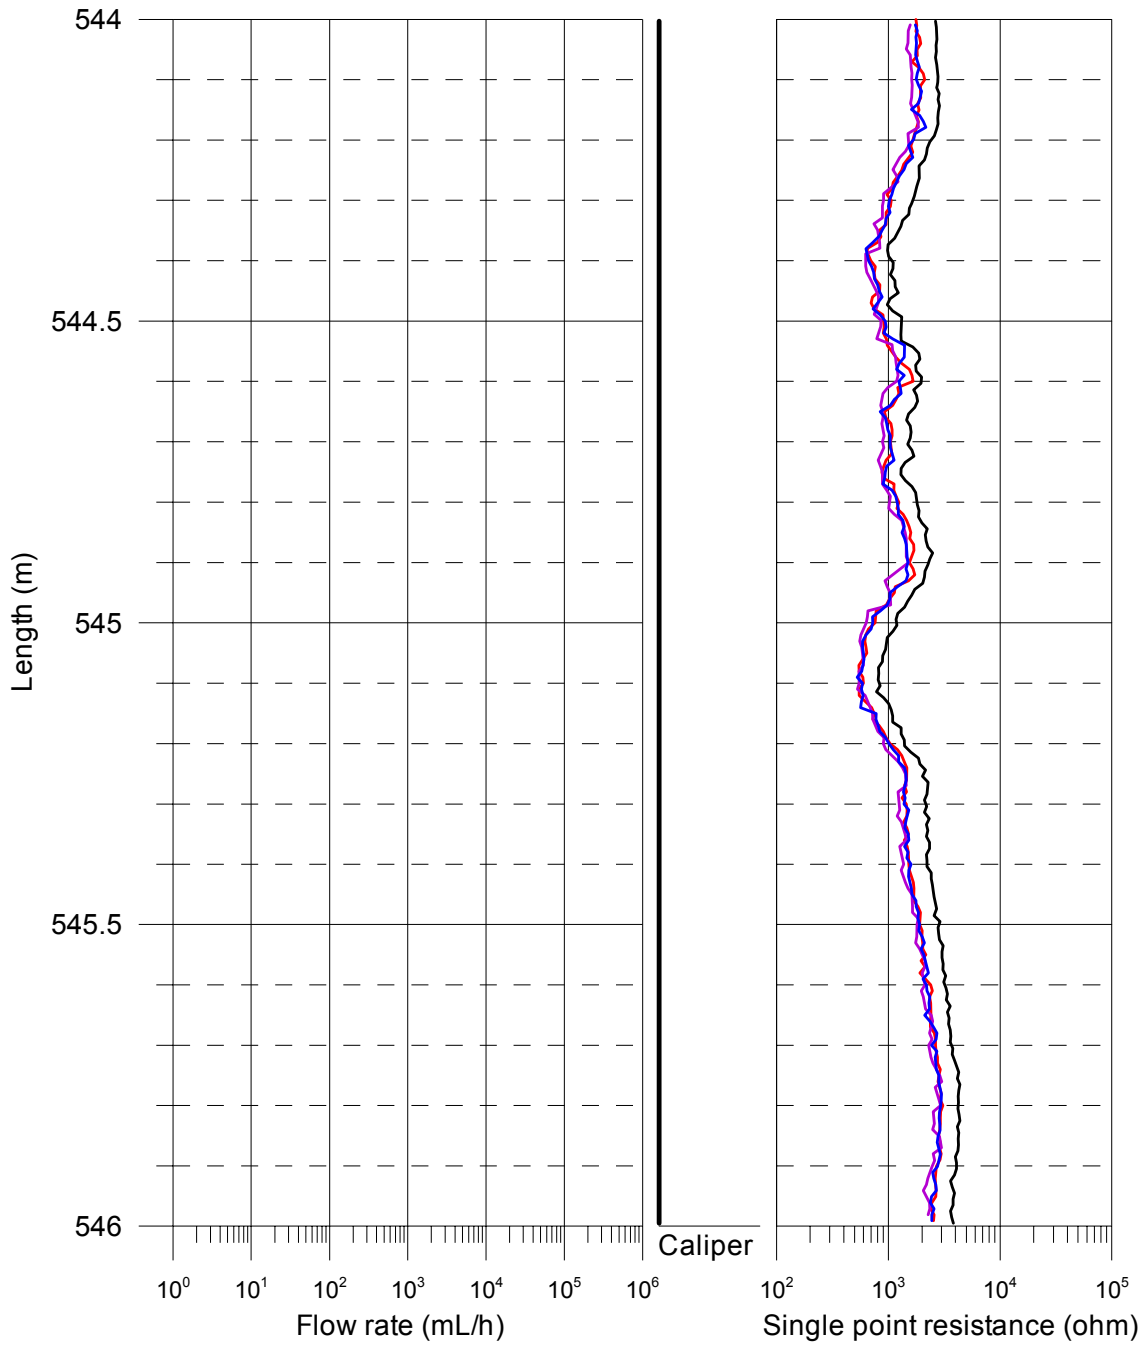


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

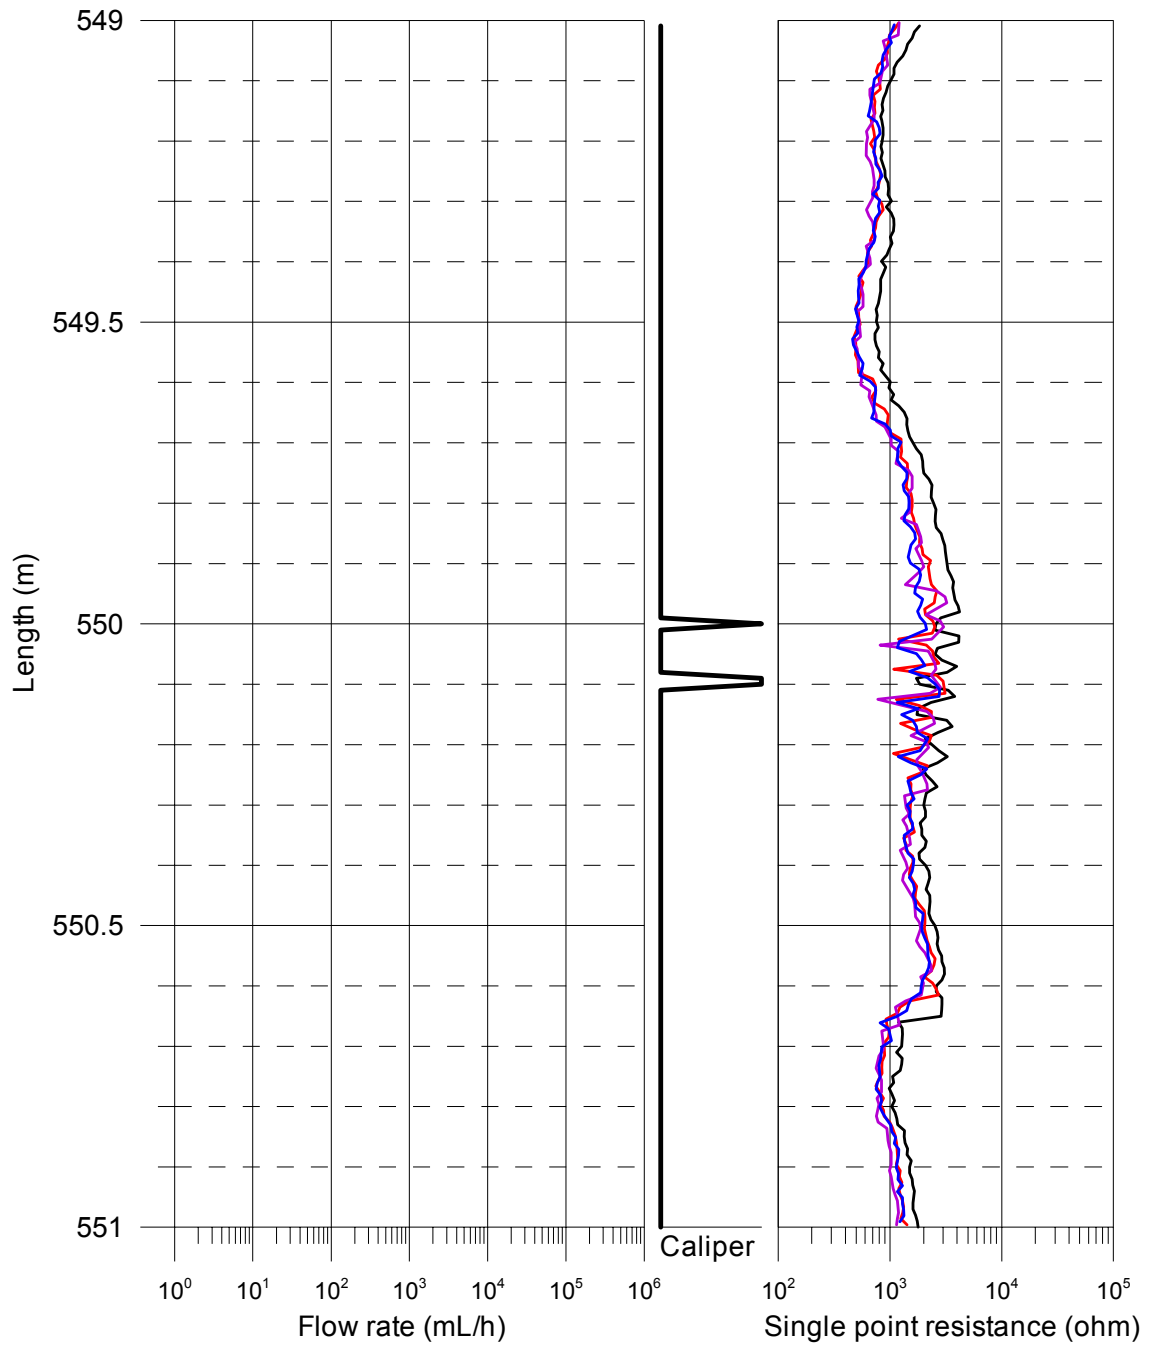


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

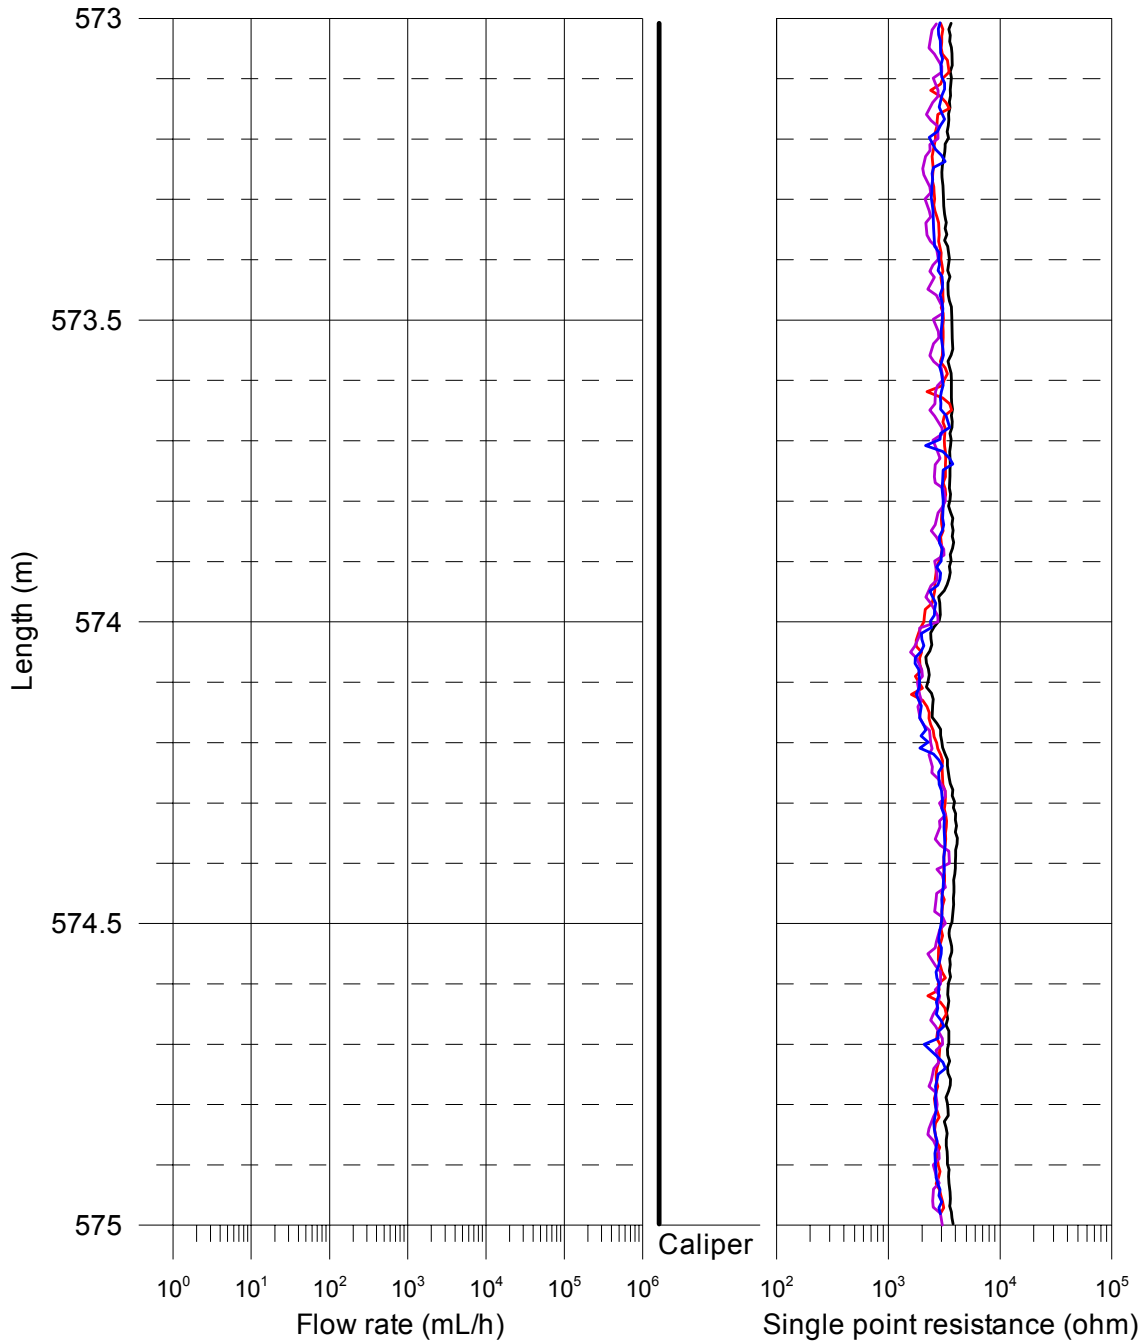


Laxemar, borehole KLX12A
 SPR and Caliper results after length correction

- SPR+Caliper, 2006-06-08 - 2006-06-09
- SPR without pumping (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (L = 0.5 m), 2006-06-14 - 2006-06-15

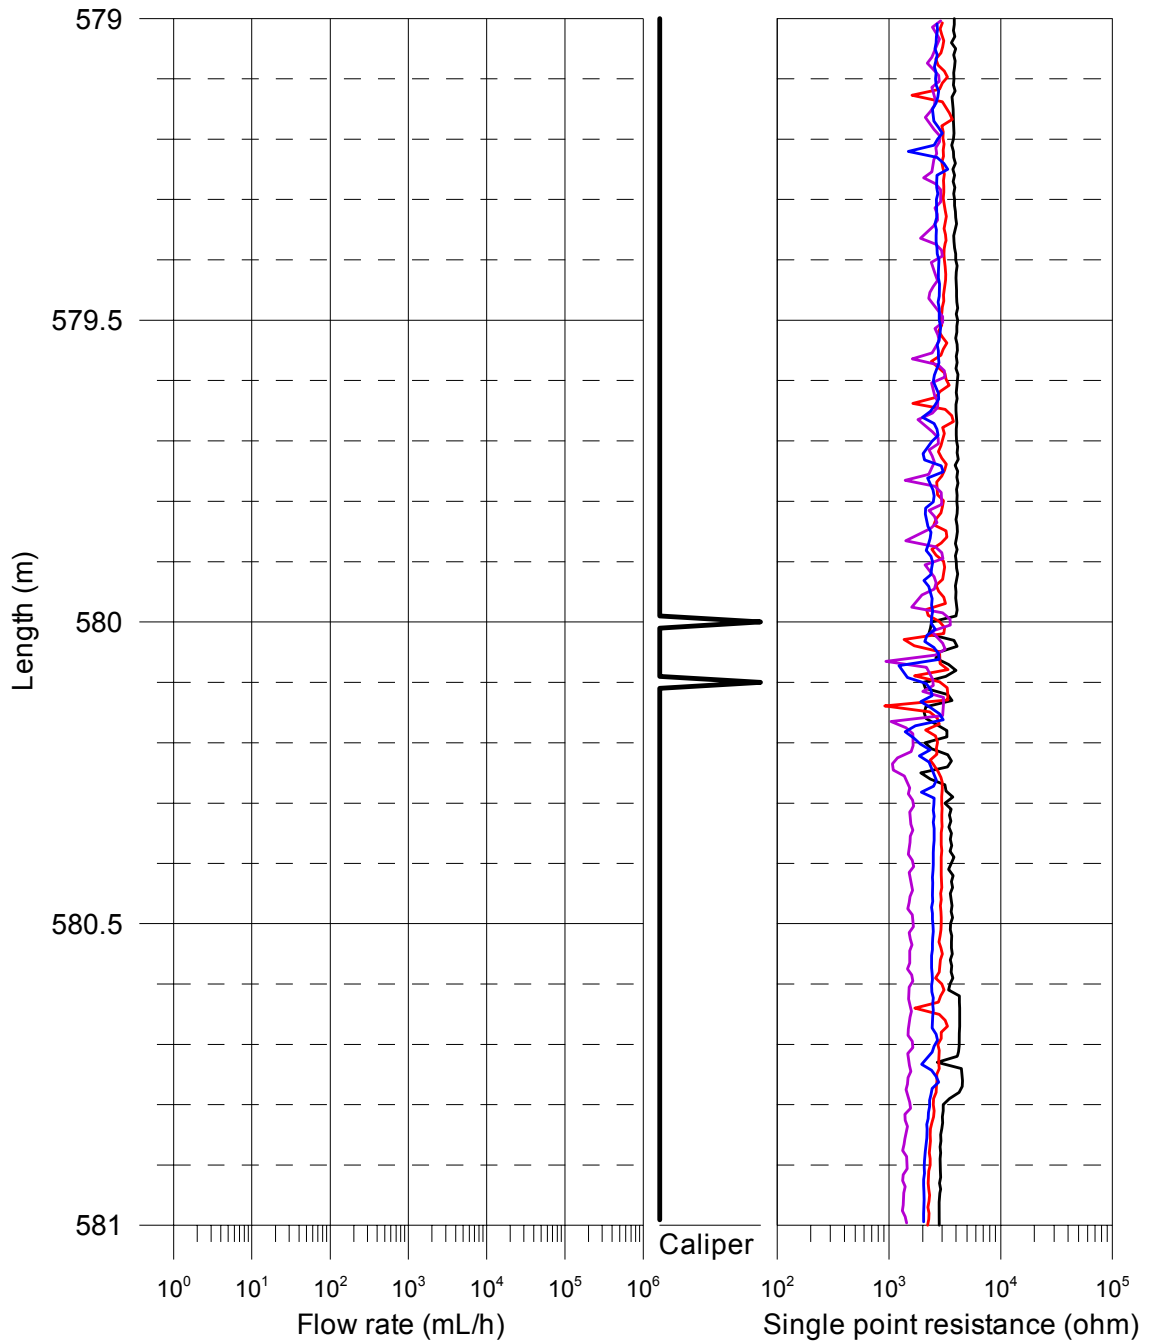


Laxemar, borehole KLX12A
Length correction

- SPR+Caliper (downwards), 2006-06-08 - 2006-06-09
- SPR without pumping (upwards) (L = 5 m), 2006-06-09 - 2006-06-10
- SPR with pumping (upwards) (L = 5 m), 2006-06-11 - 2006-06-12
- SPR with pumping (upwards) (L = 1 m), 2006-06-12 - 2006-06-14
- SPR with pumping during fracture-EC (upwards) (L = 0.5 m), 2006-06-14 - 2006-06-15

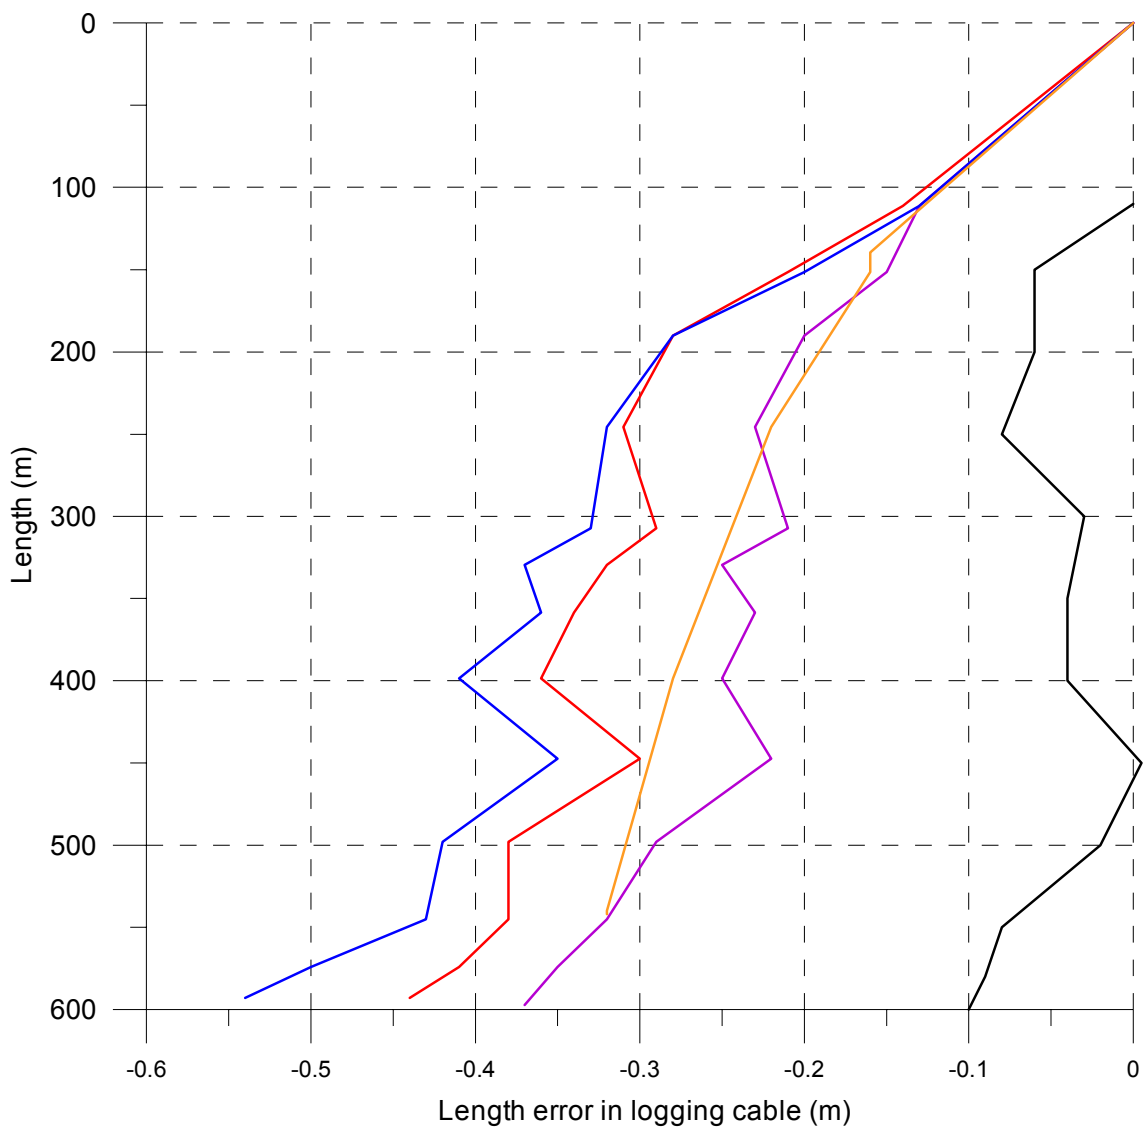

Laxemar, borehole KLX12A Electric conductivity of borehole water

- Measured without lower rubber disks:
 - ▽ Measured without pumping (downwards), 2006-06-09
 - △ Measured without pumping (upwards), 2006-06-09
 - ▽ Measured with pumping (downwards), 2006-06-15
 - △ Measured with pumping (upwards), 2006-06-15
- Measured with lower rubber disks:
 - + Time series of fracture specific water, 2006-06-14 - 2006-06-15
 - ⊕ Last in time series, fracture specific water, 2006-06-14 -2006-06-15

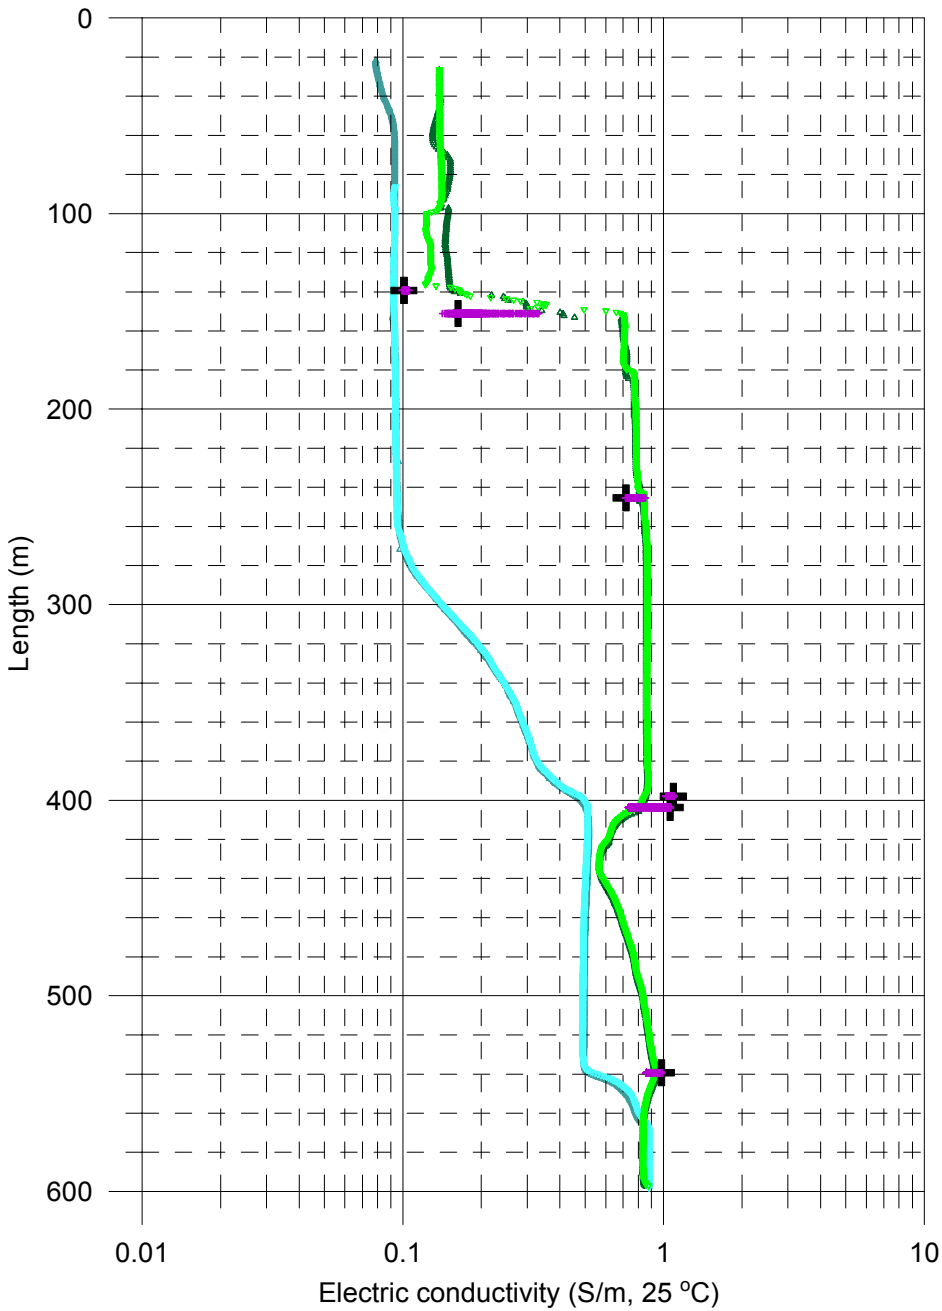


Laxemar, borehole KLX12A
 Temperature of borehole water

Measured without lower rubber disks:

- ▽ Measured without pumping (downwards), 2006-06-09
- △ Measured without pumping (upwards), 2006-06-09
- ▽ Measured with pumping (downwards), 2006-06-15
- △ Measured with pumping (upwards), 2006-06-15


Measured with lower rubber disks:

- + Time series of fracture specific water, 2006-06-14 - 2006-06-15
- ⊕ Last in time series, fracture specific water, 2006-06-14 - 2006-06-15

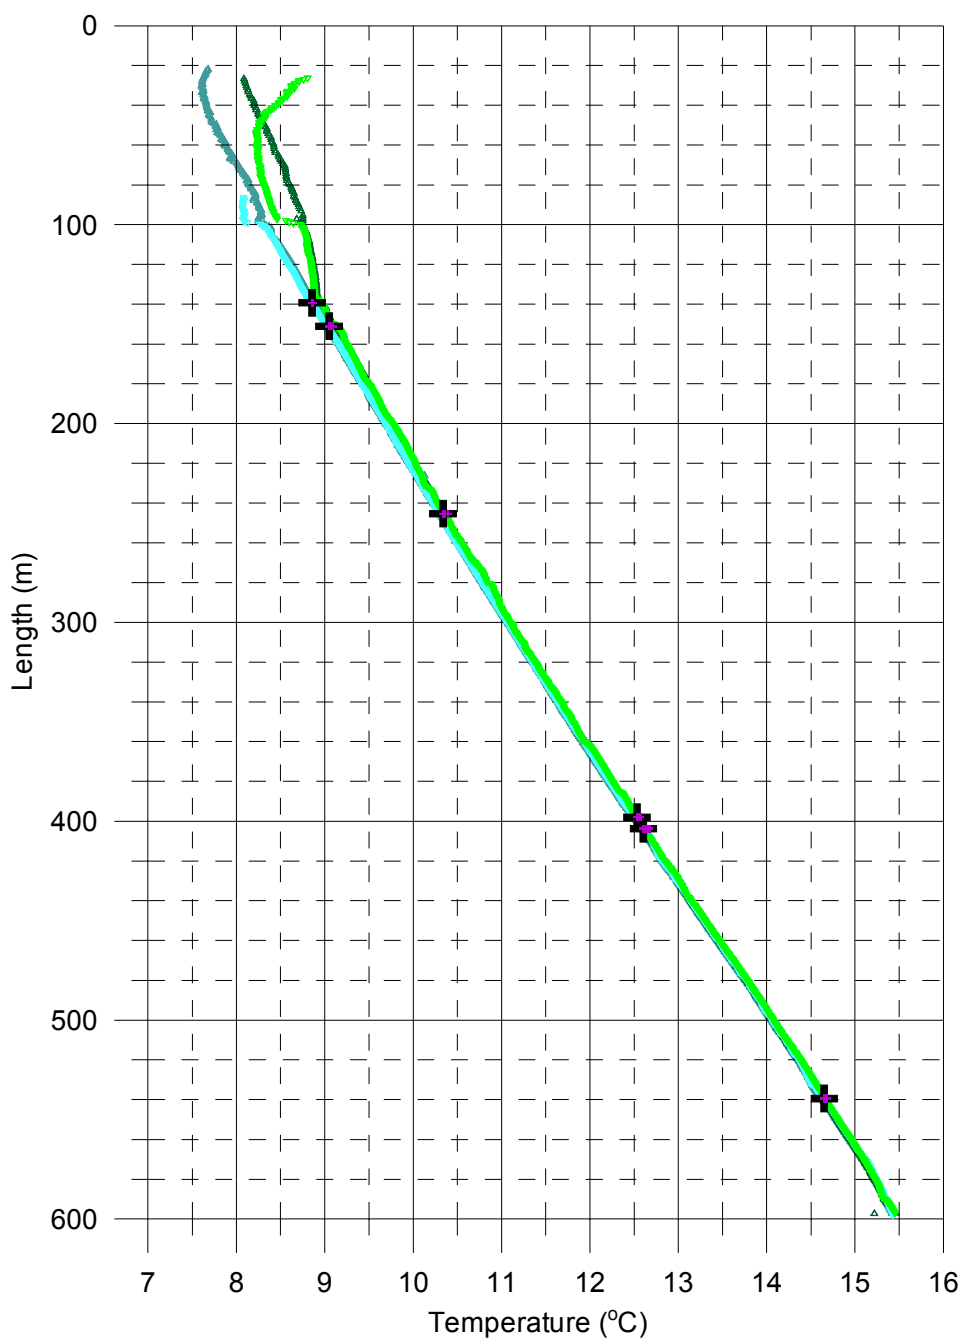


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

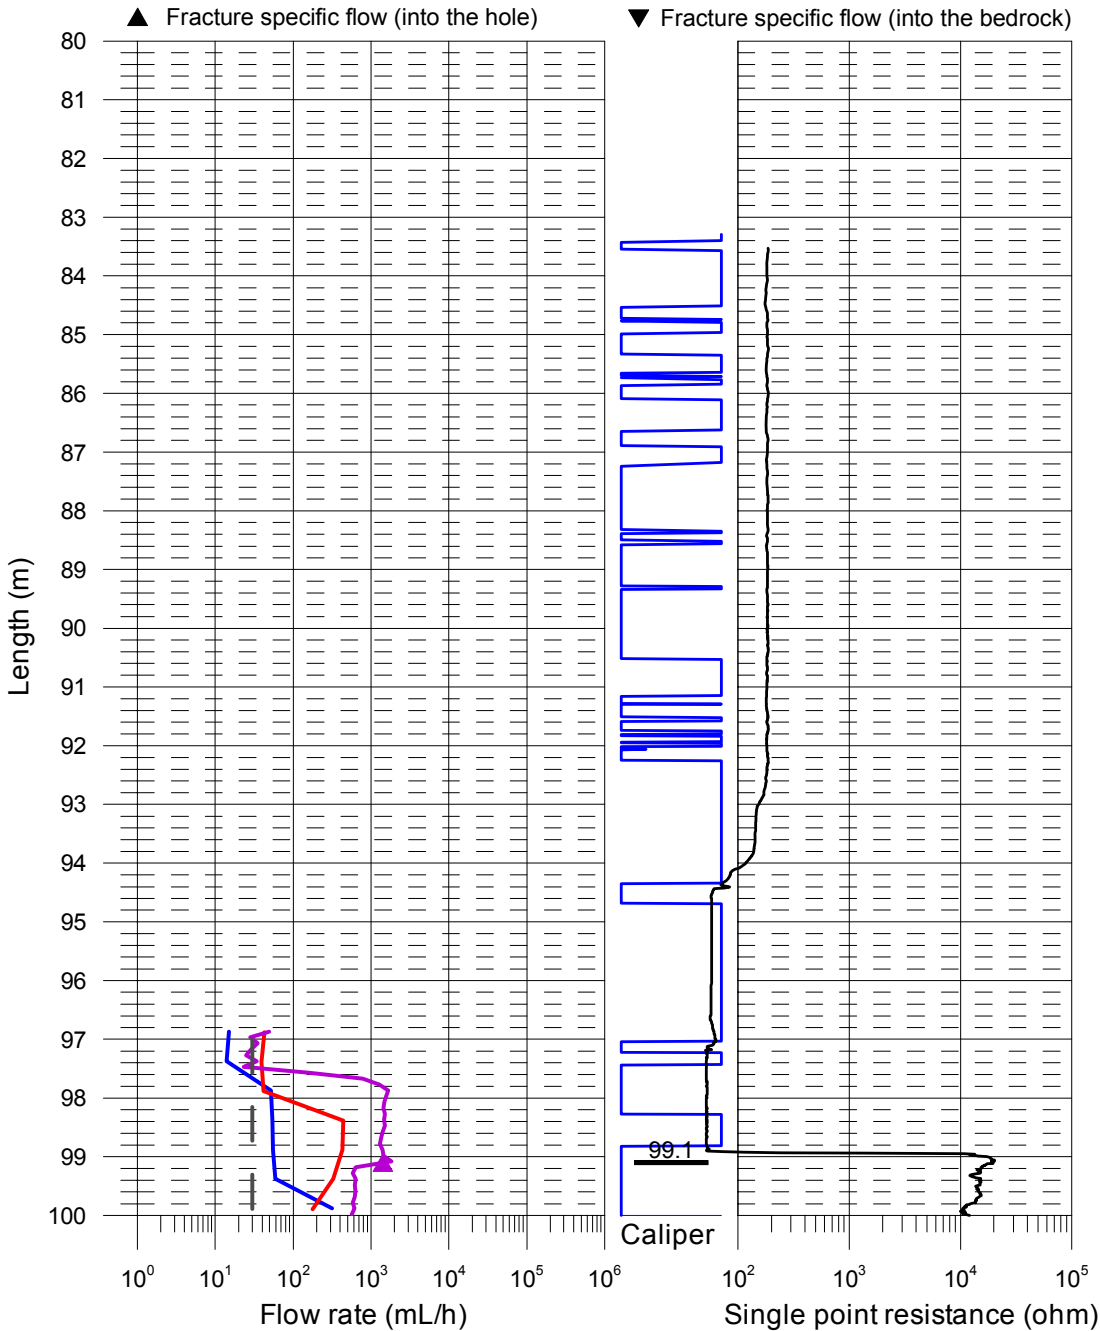


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

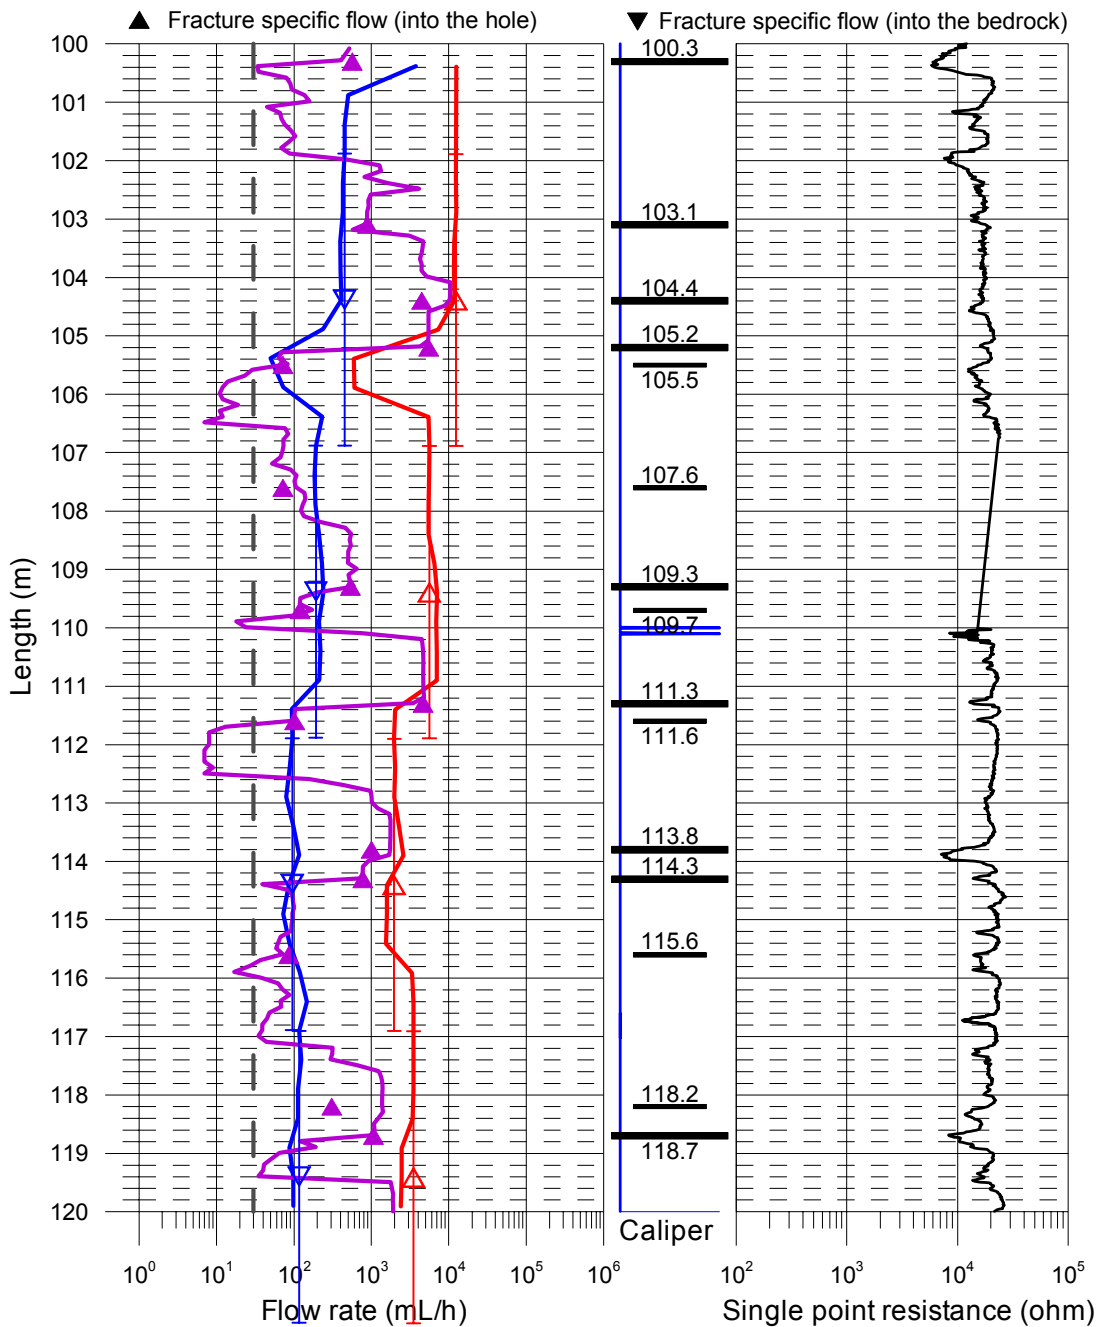


Laxemar, borehole KLX12A Flow rate, caliper and single point resistance

- ▲ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▼ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- ▲ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

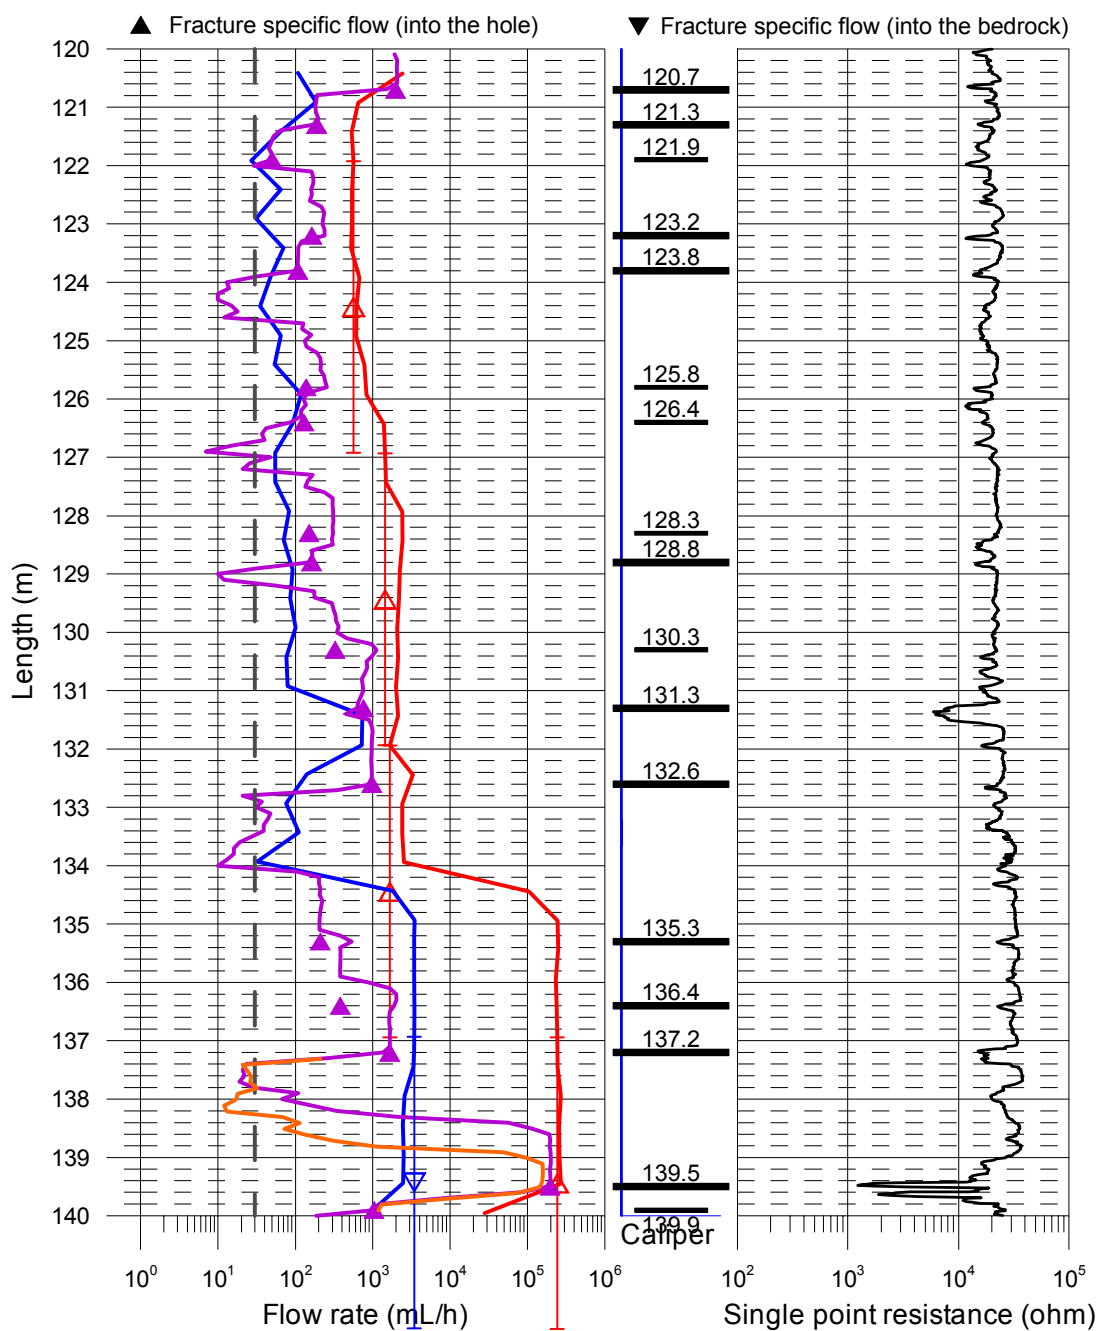


Laxemar, borehole K LX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

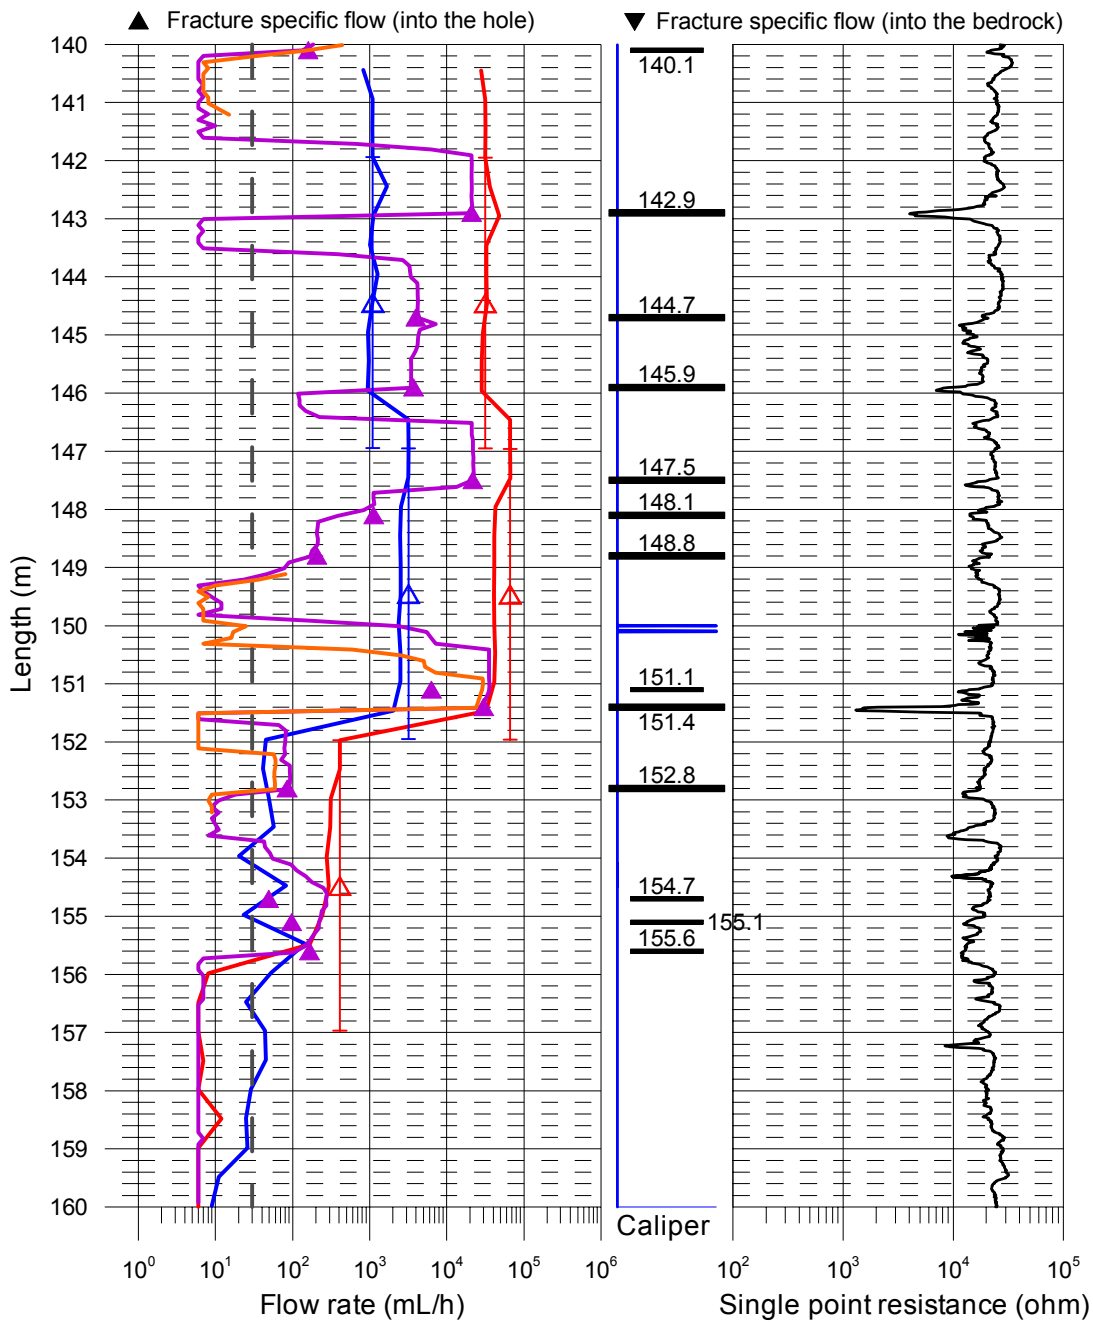


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

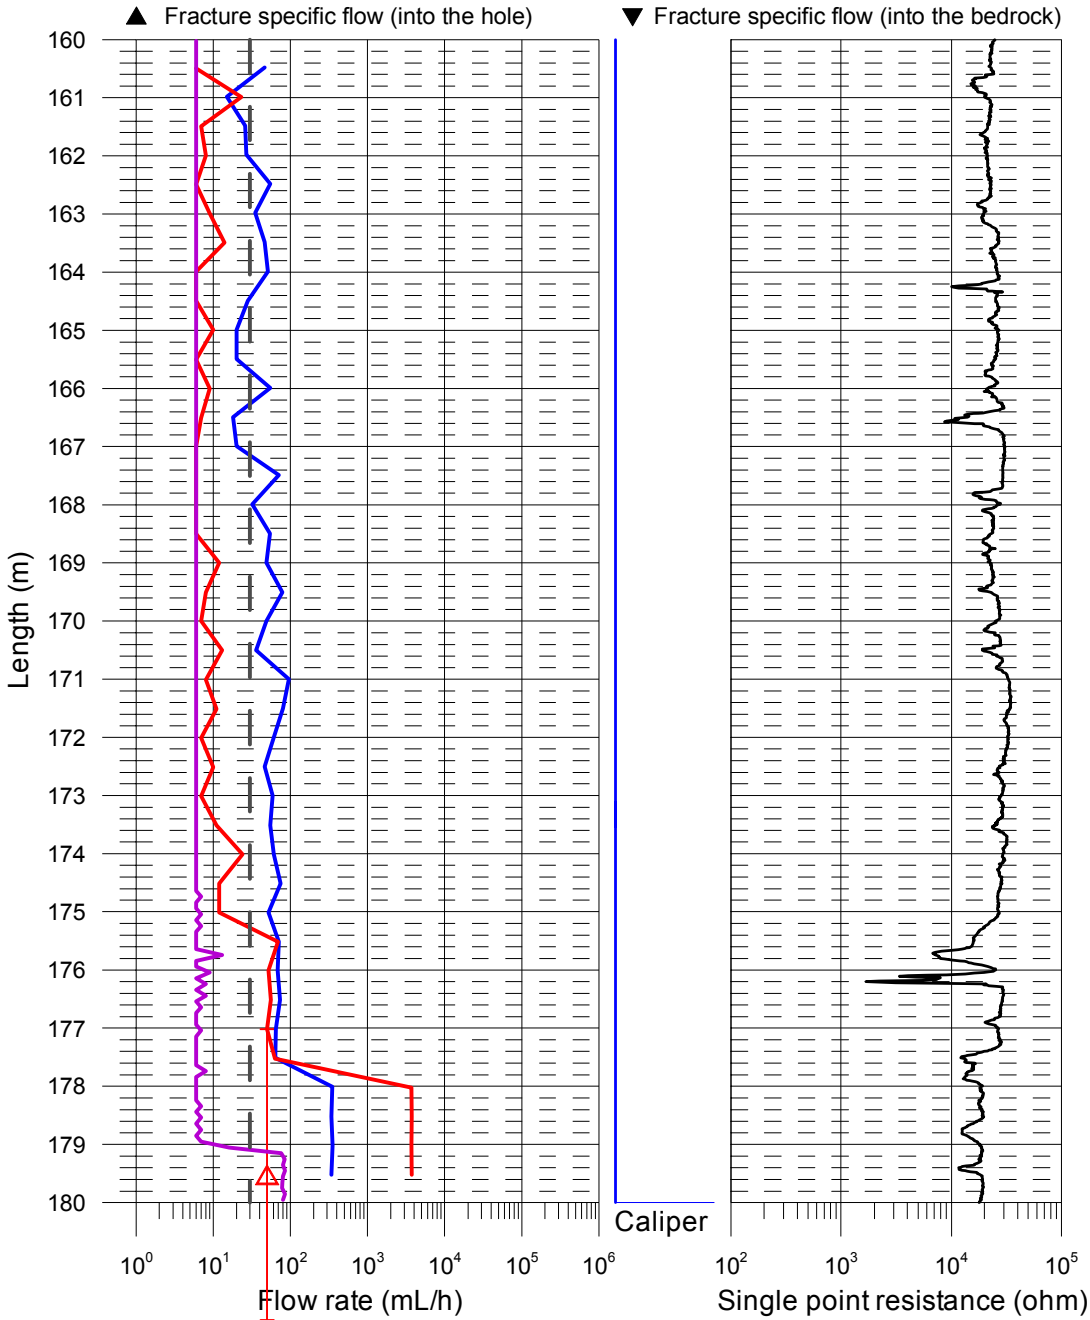


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

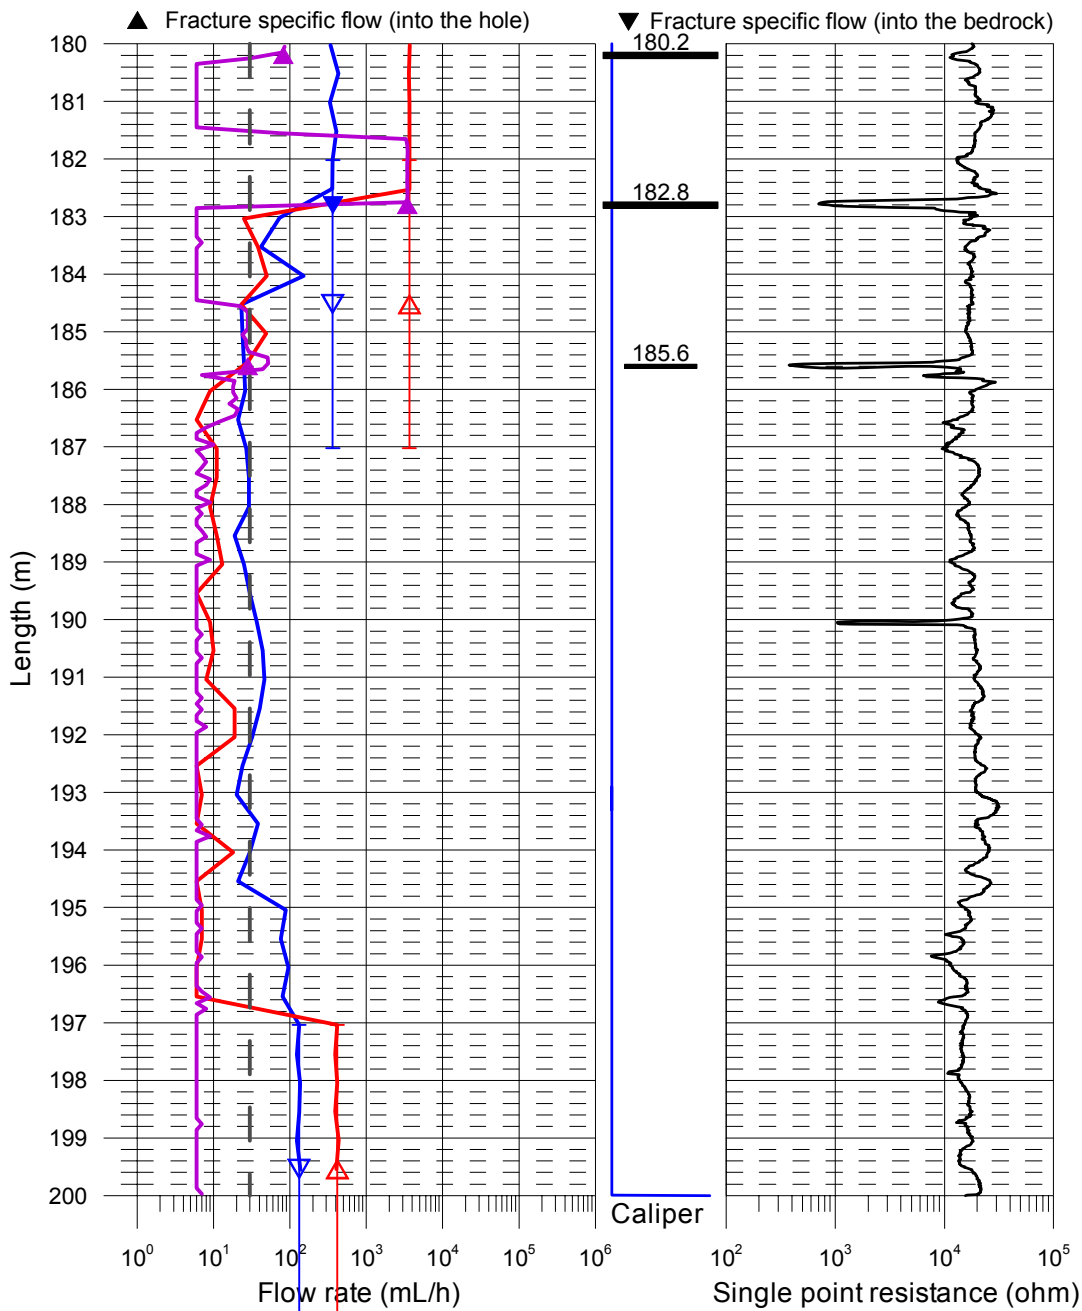


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

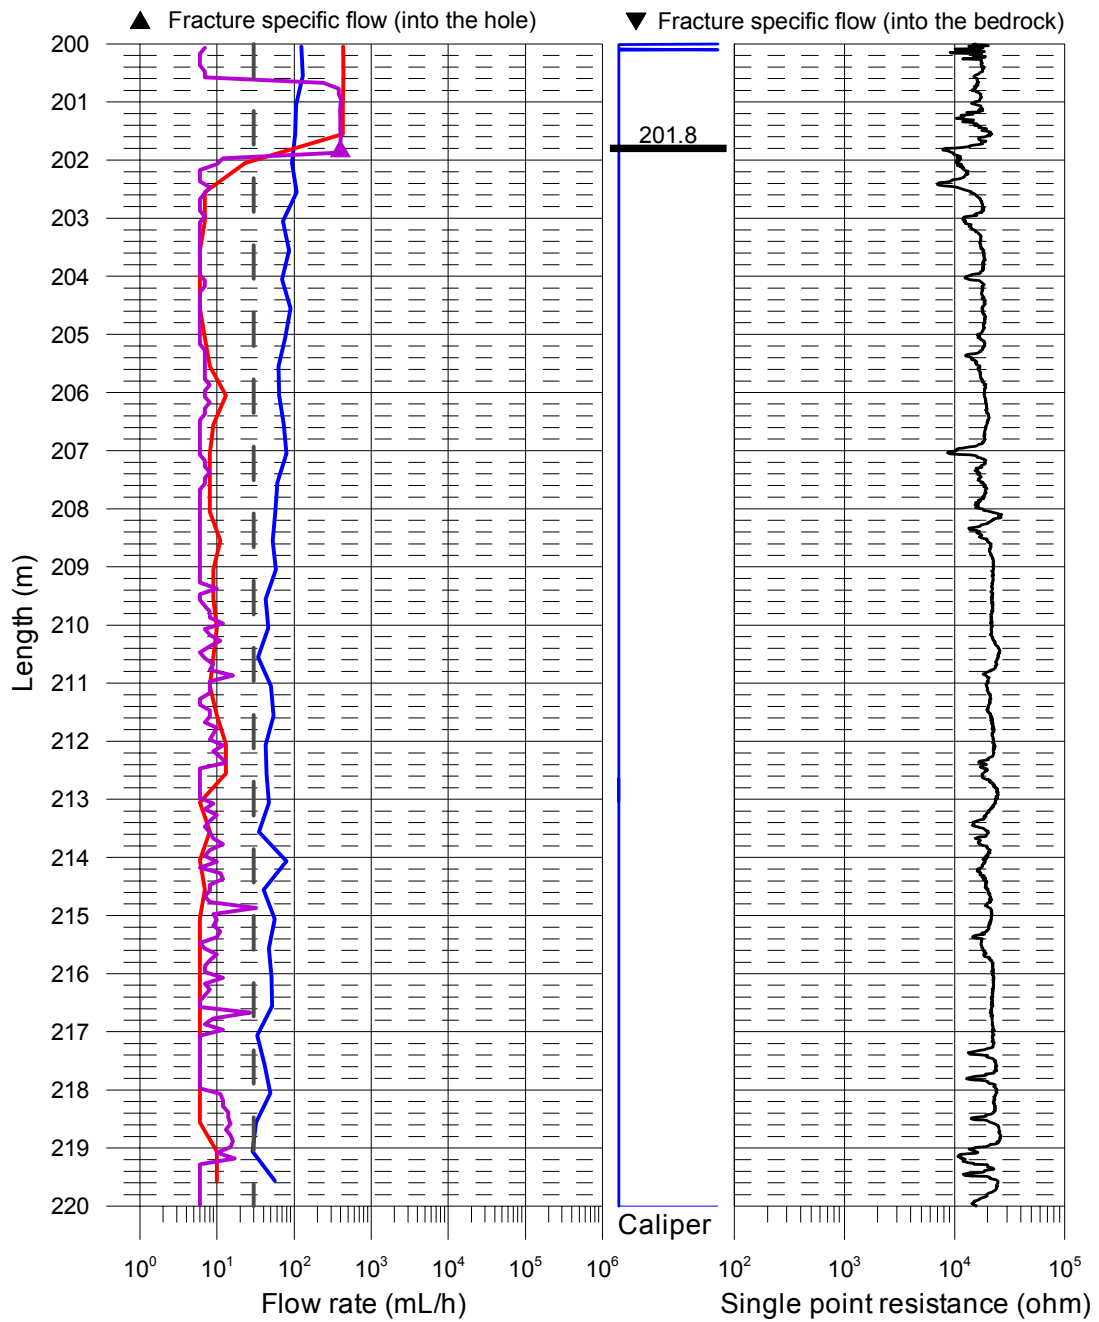


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

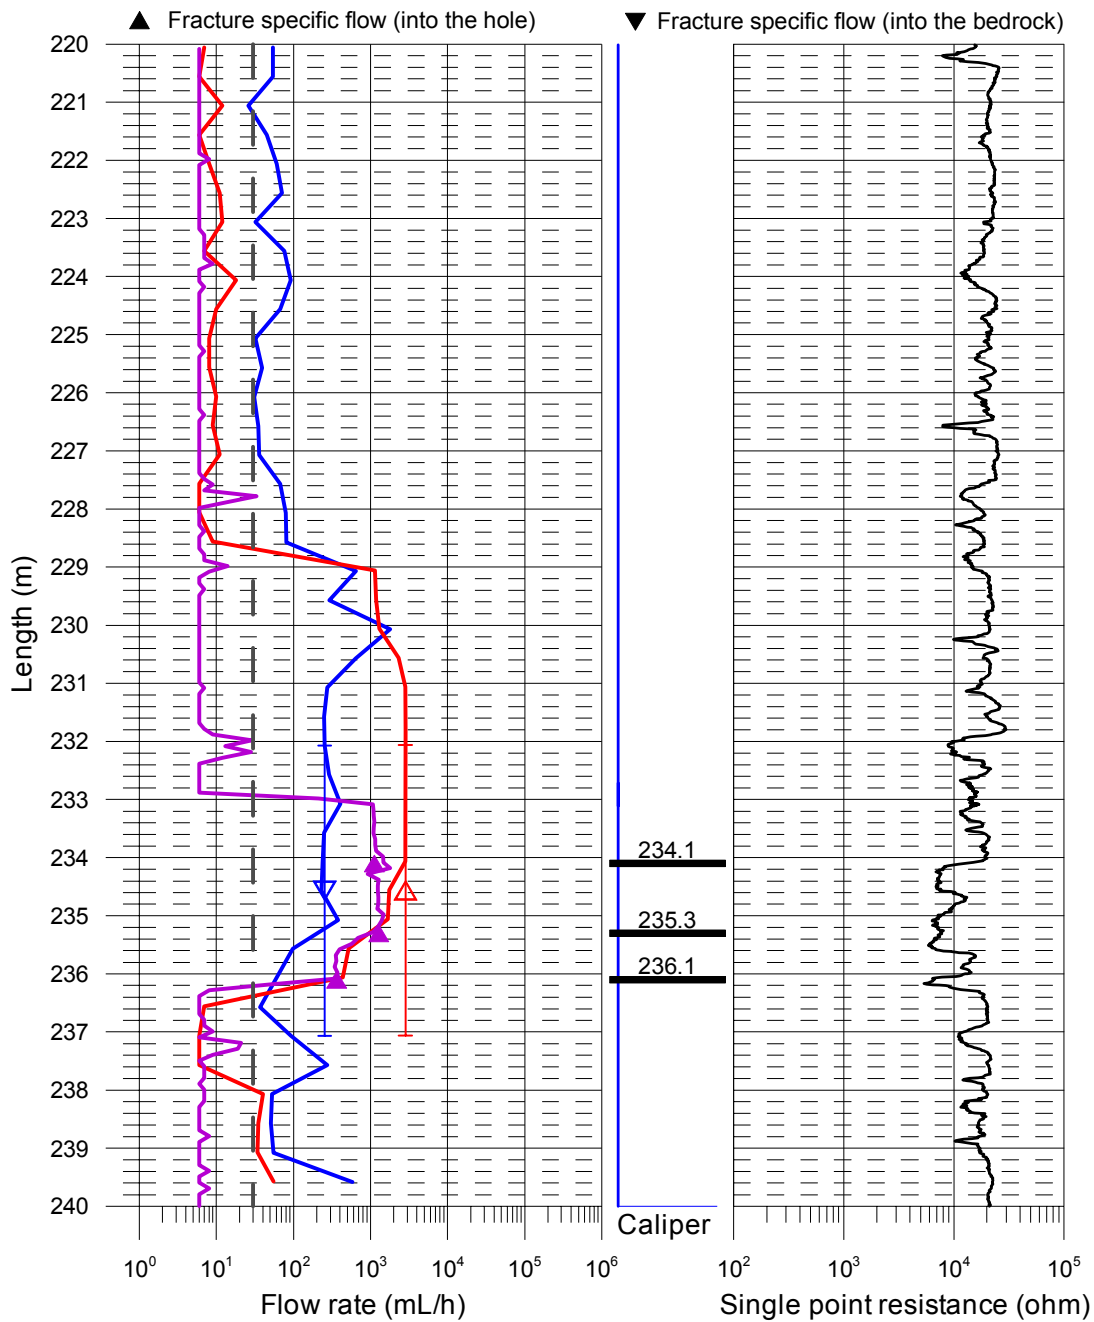


Laxemar, borehole KLX12A Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

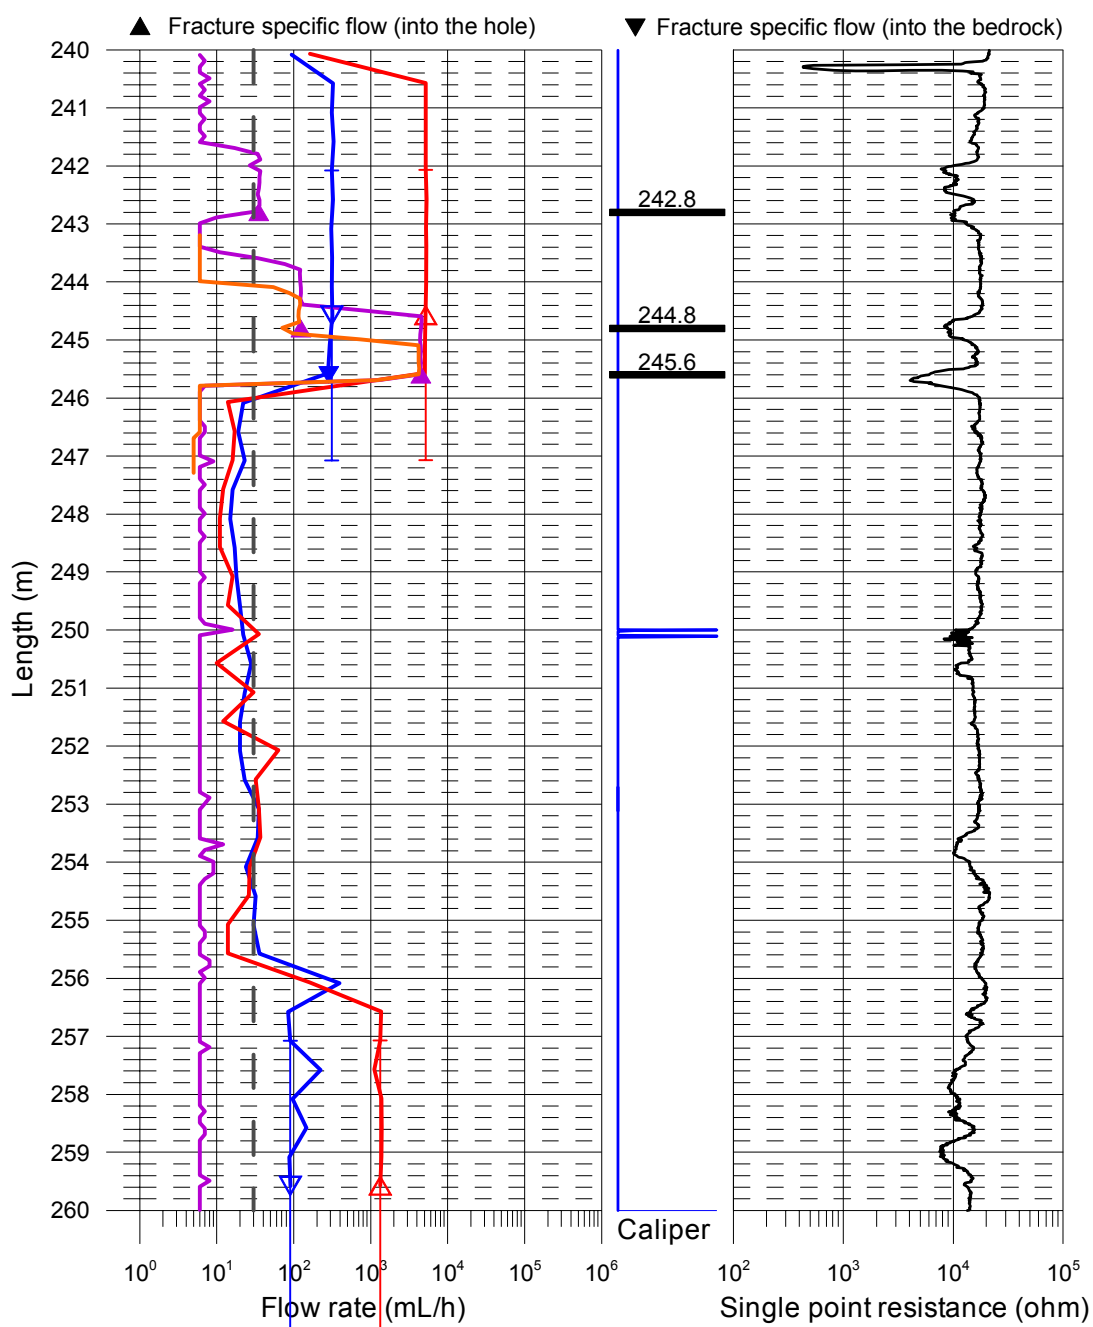


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- ▲ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▼ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- ▲ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

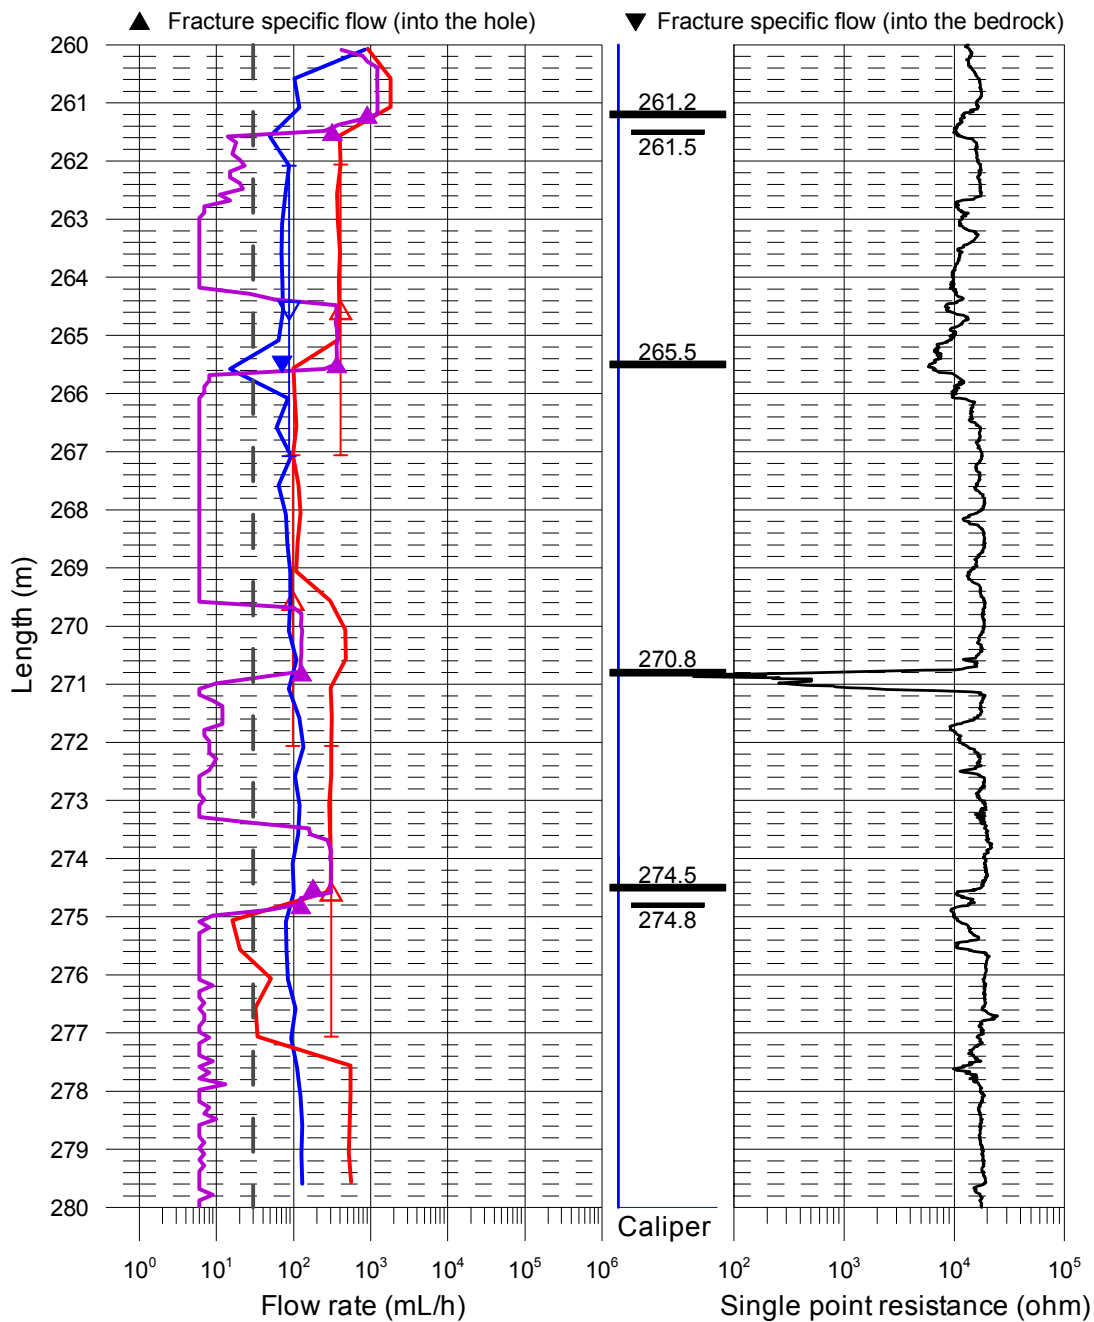


Laxemar, borehole KLX12A Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

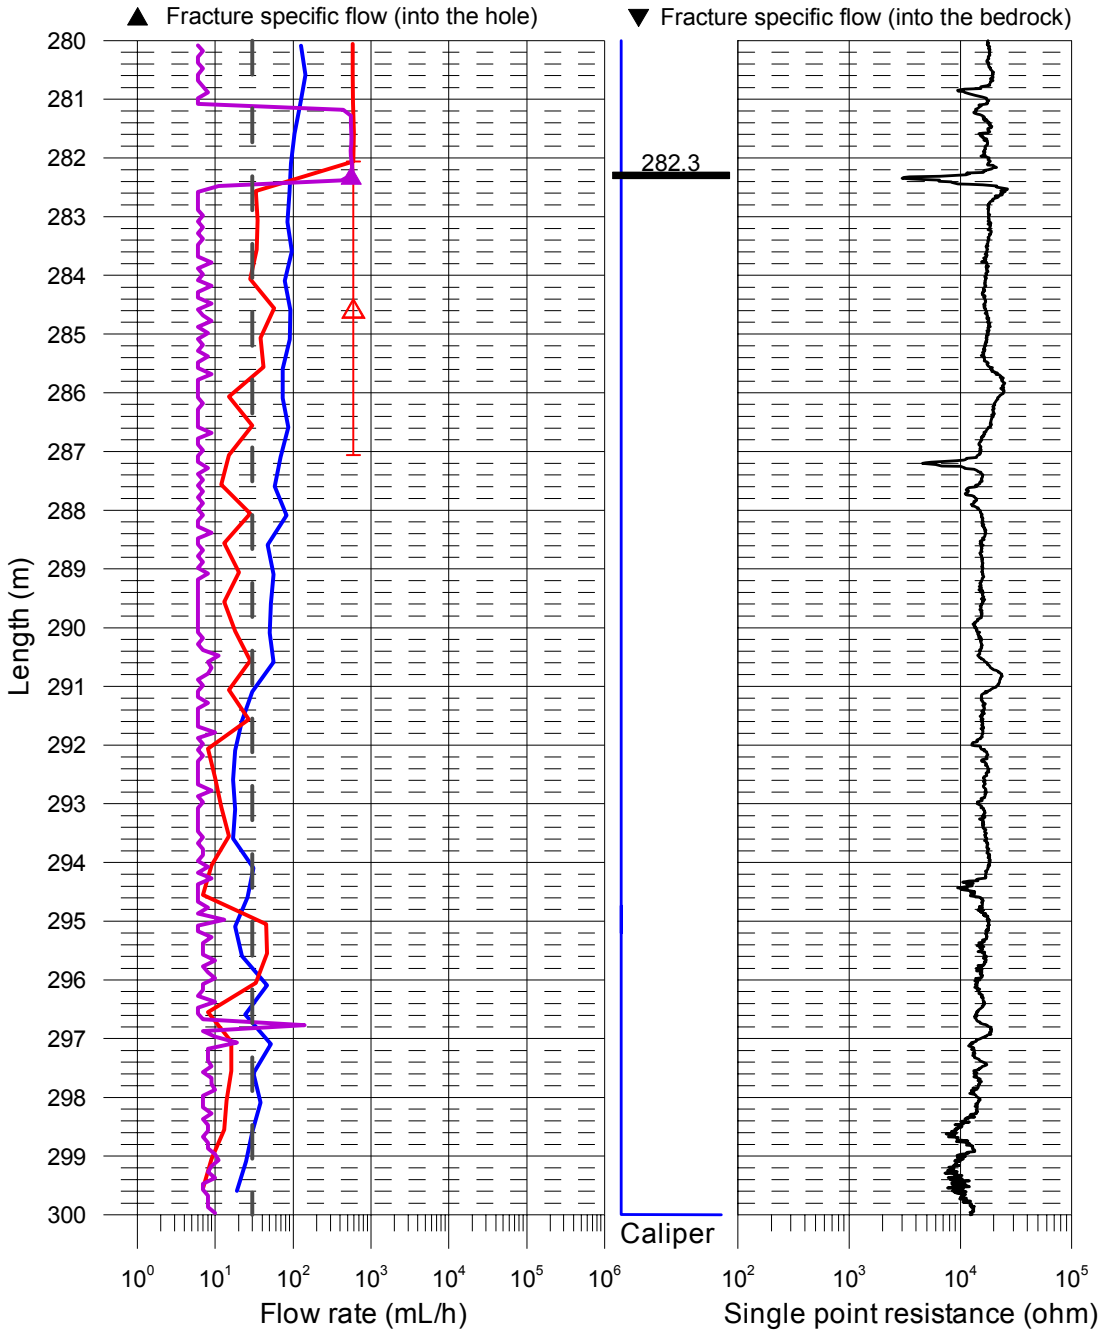


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

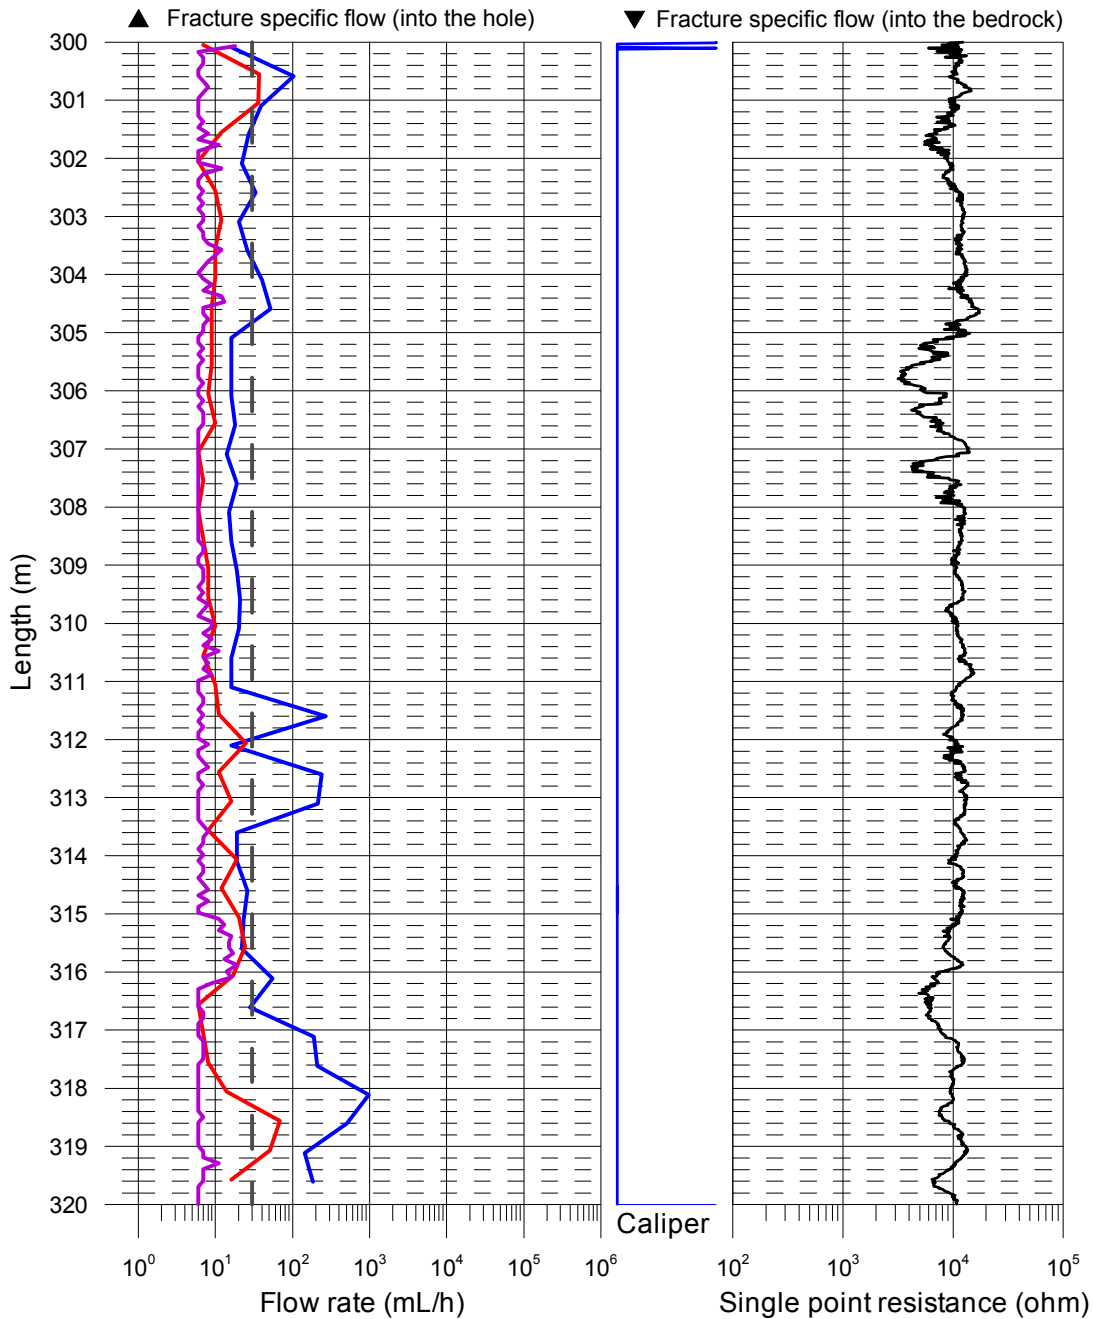


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

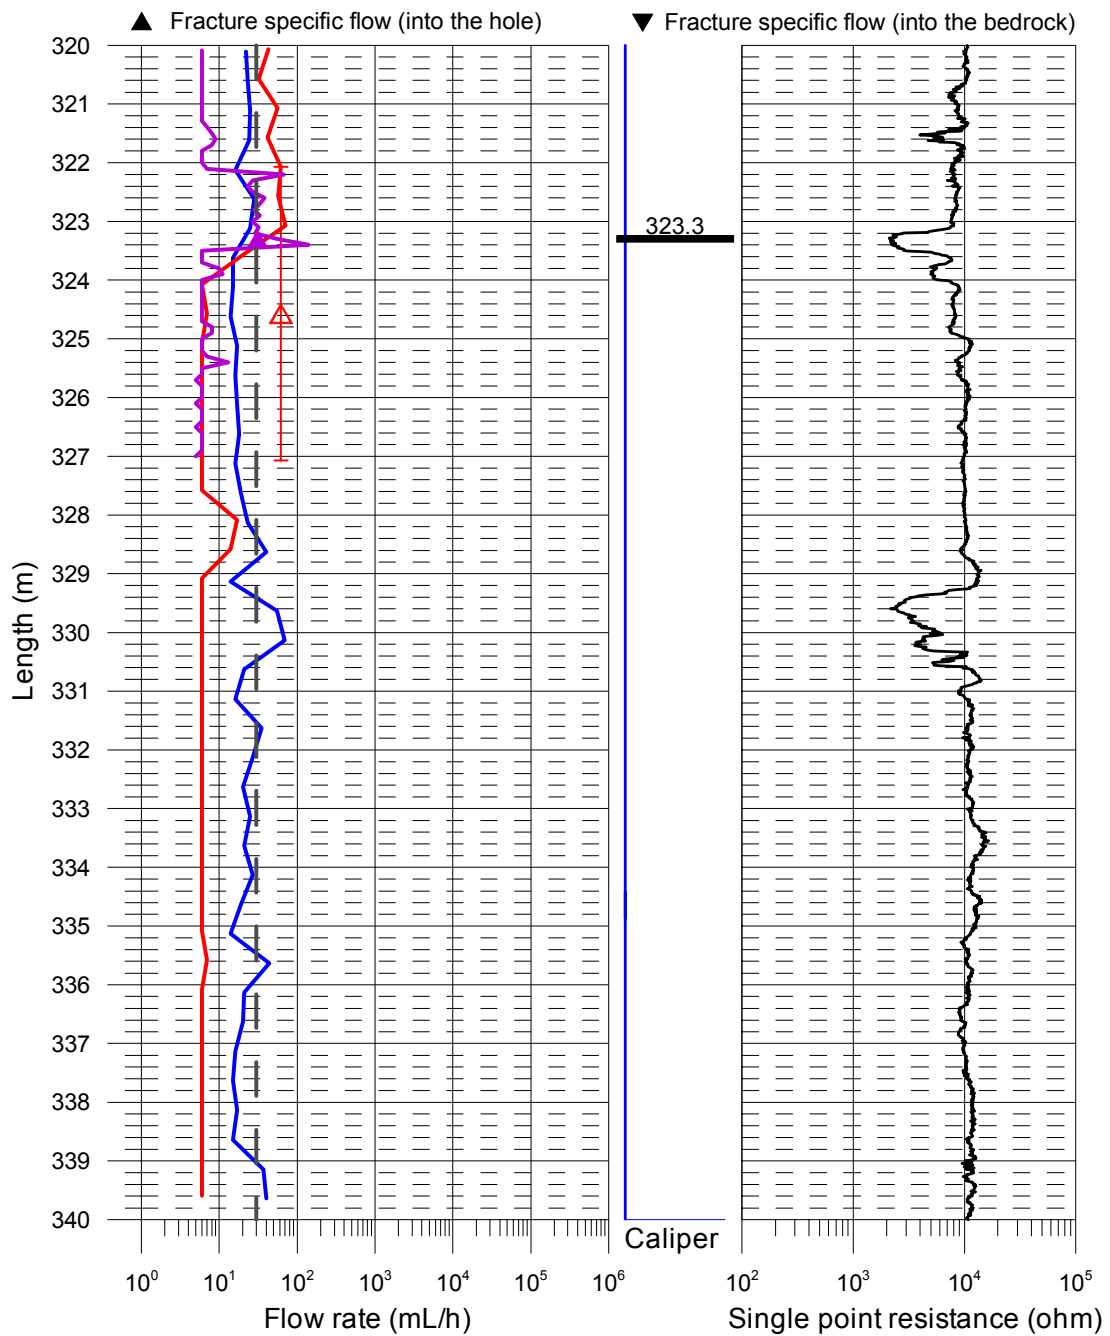


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

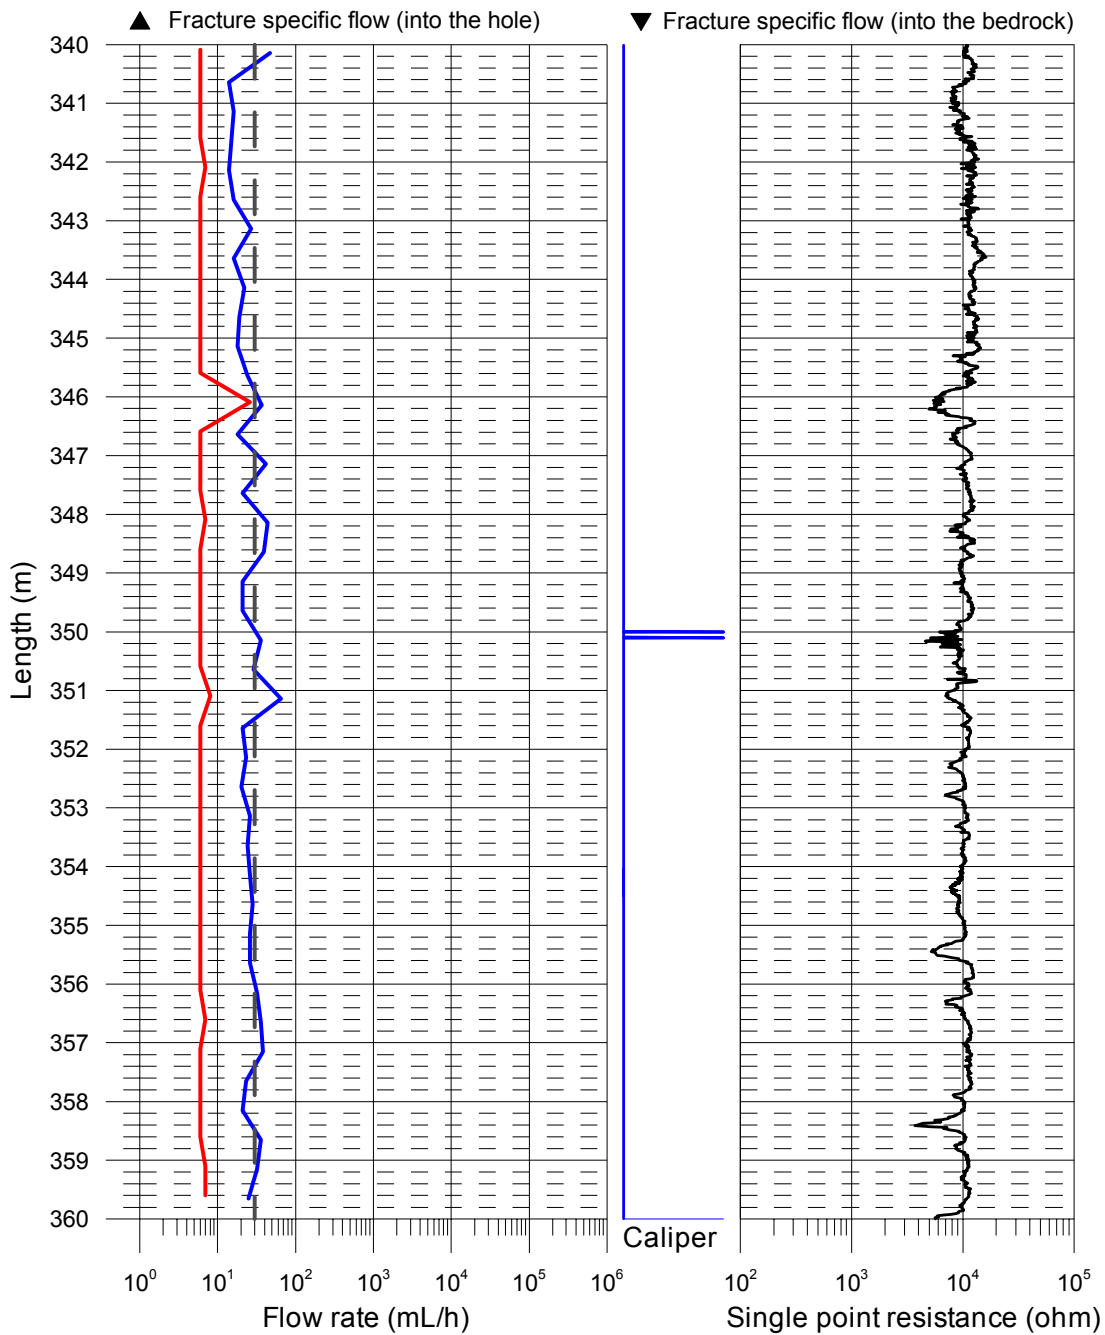


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

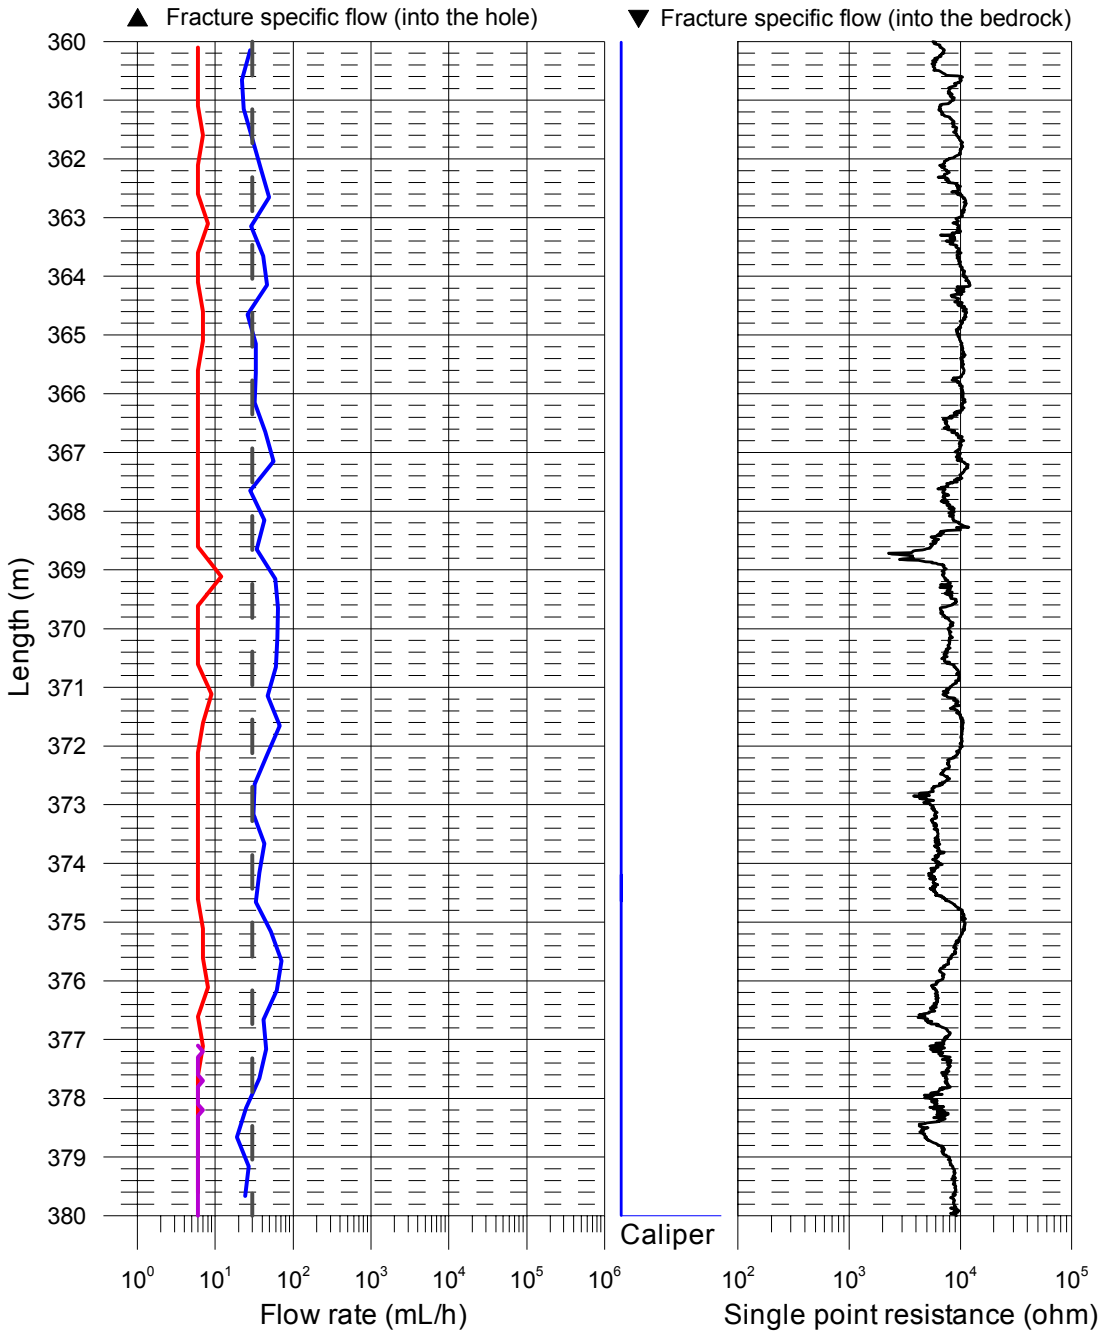


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- ▲ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▼ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- ▲ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

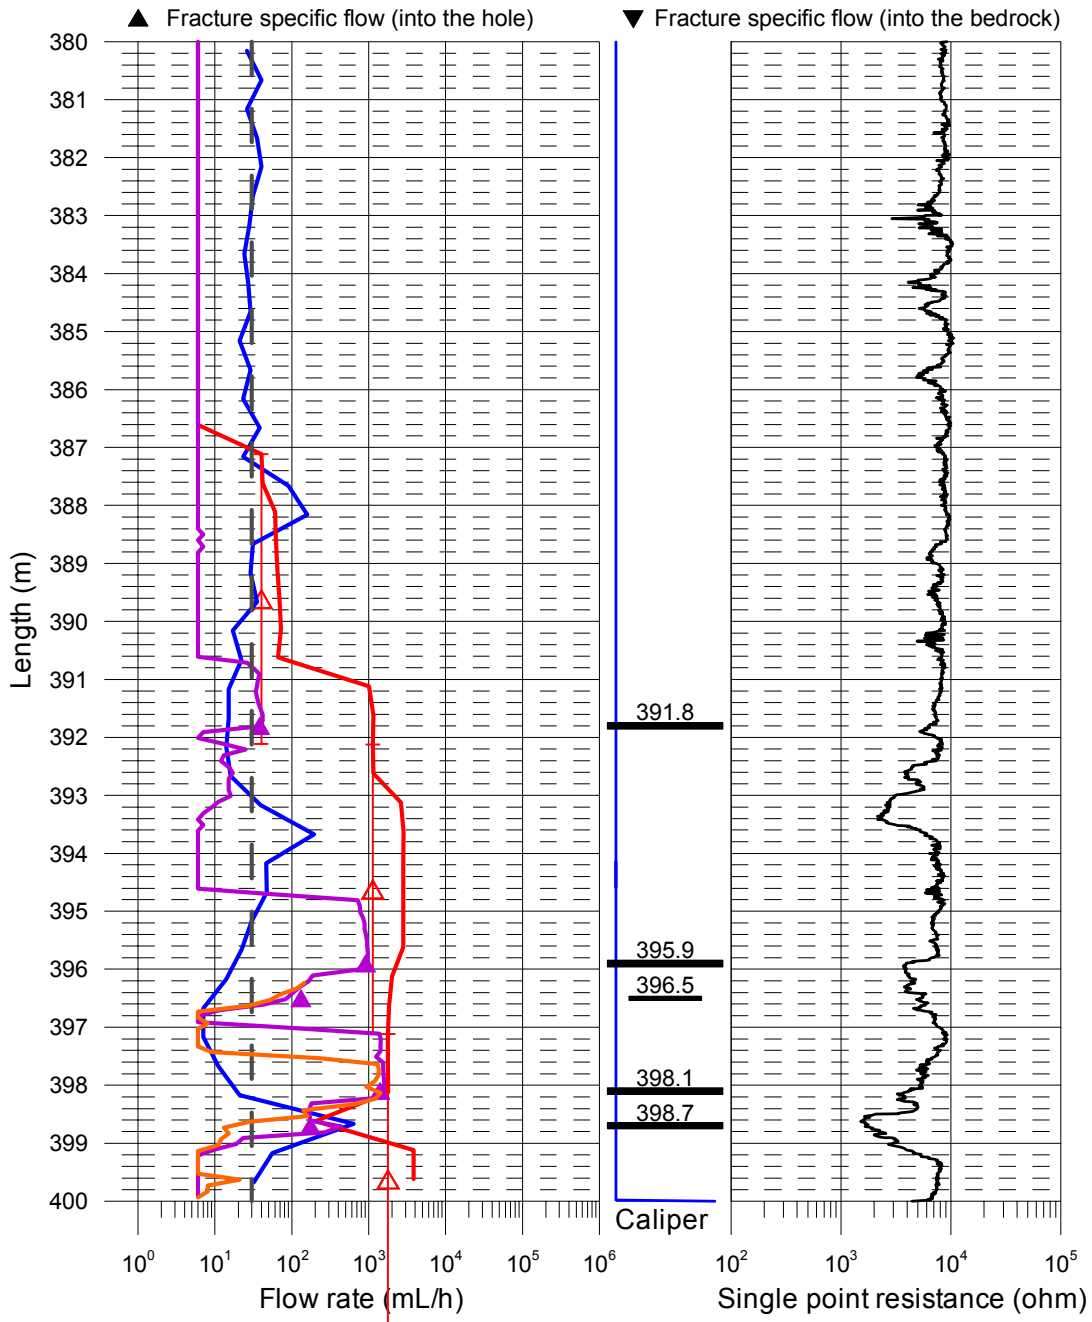


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

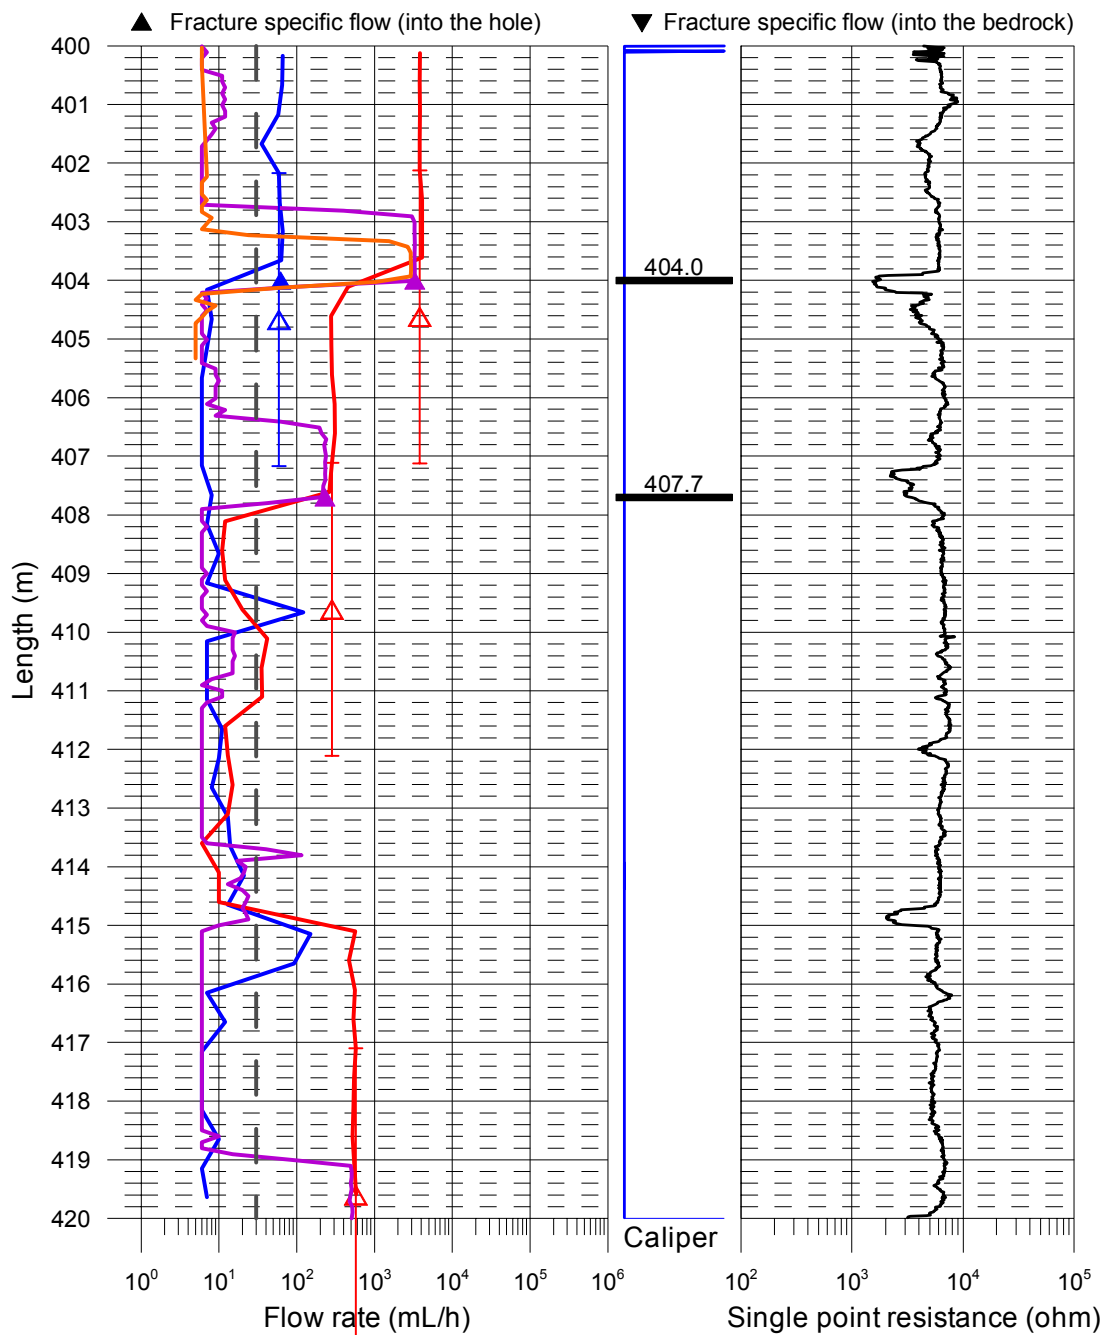


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

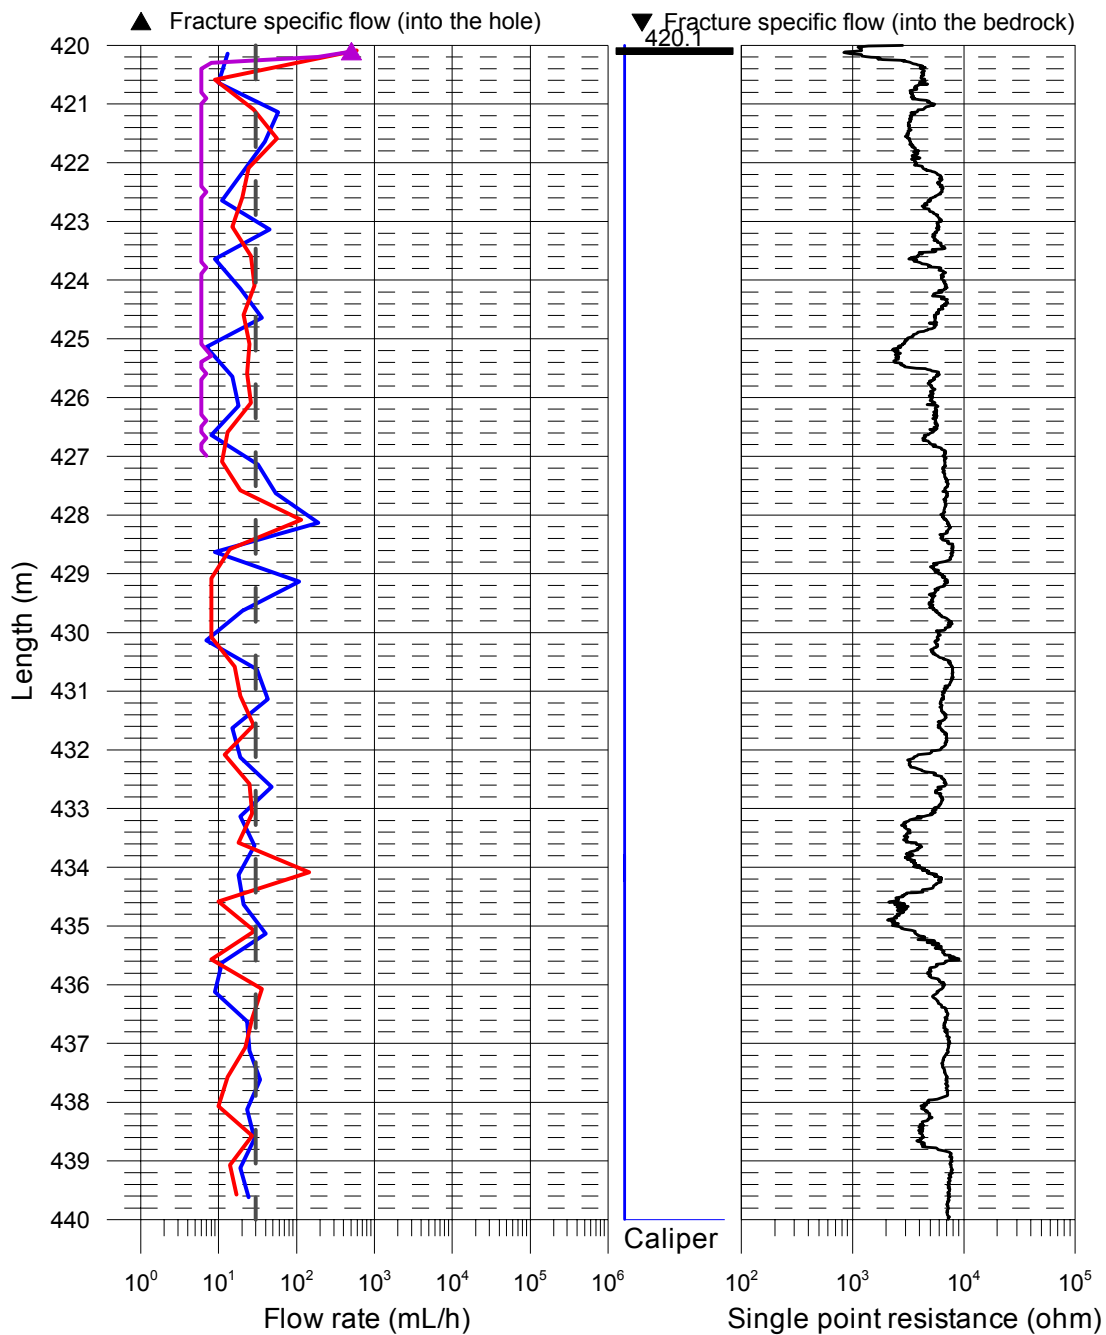


Laxemar, borehole KLX12A Flow rate, caliper and single point resistance

- ▲ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▼ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- ▲ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

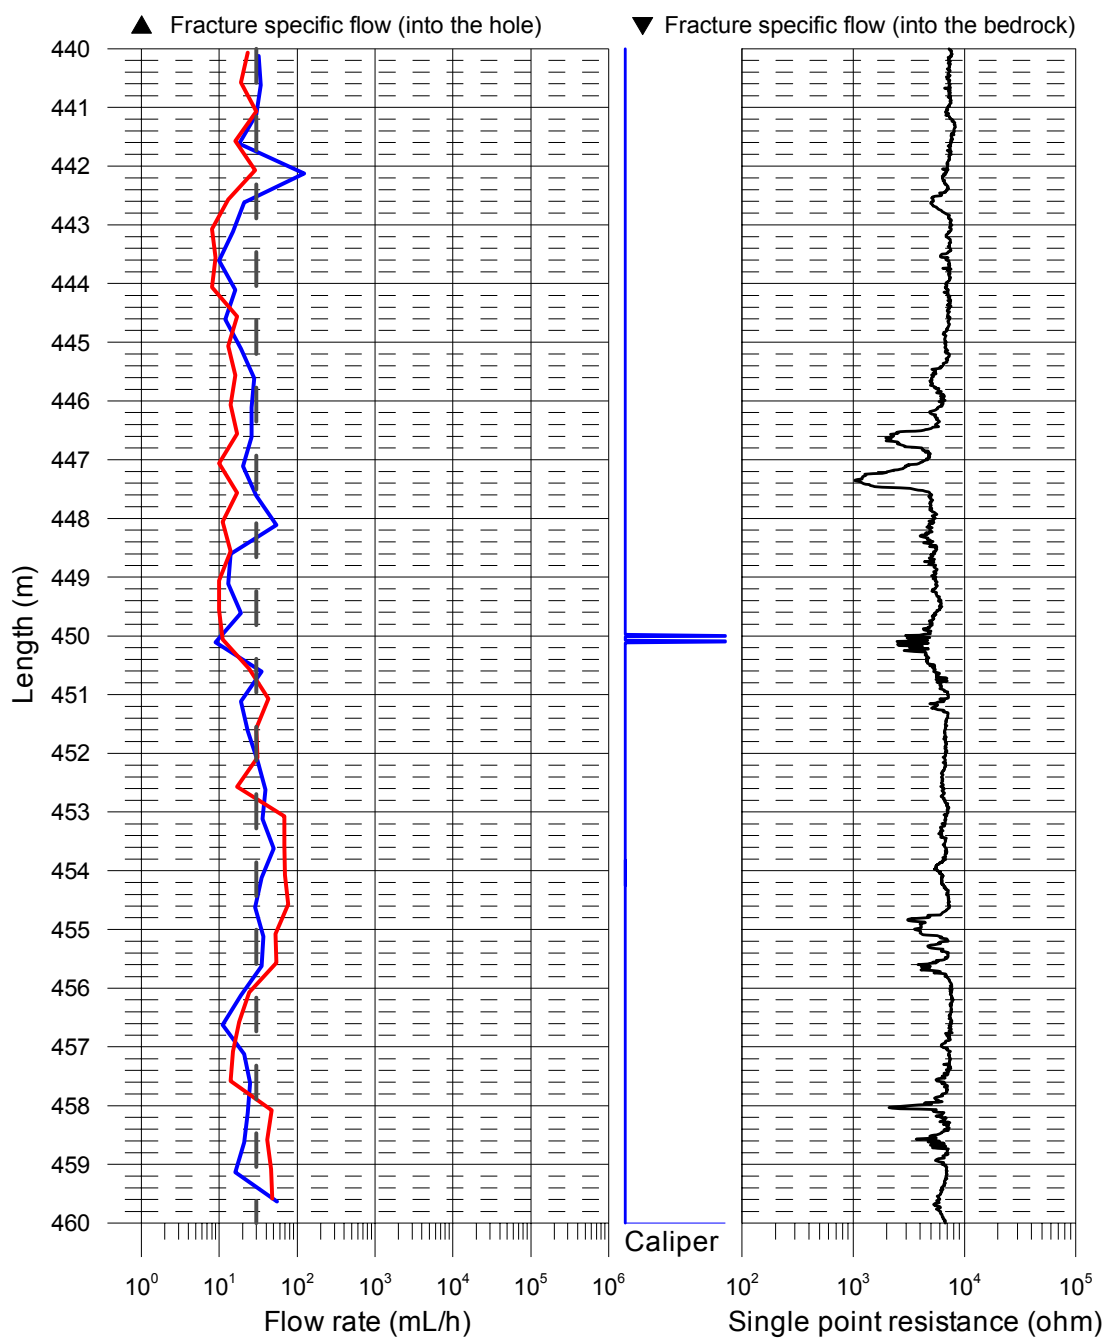


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

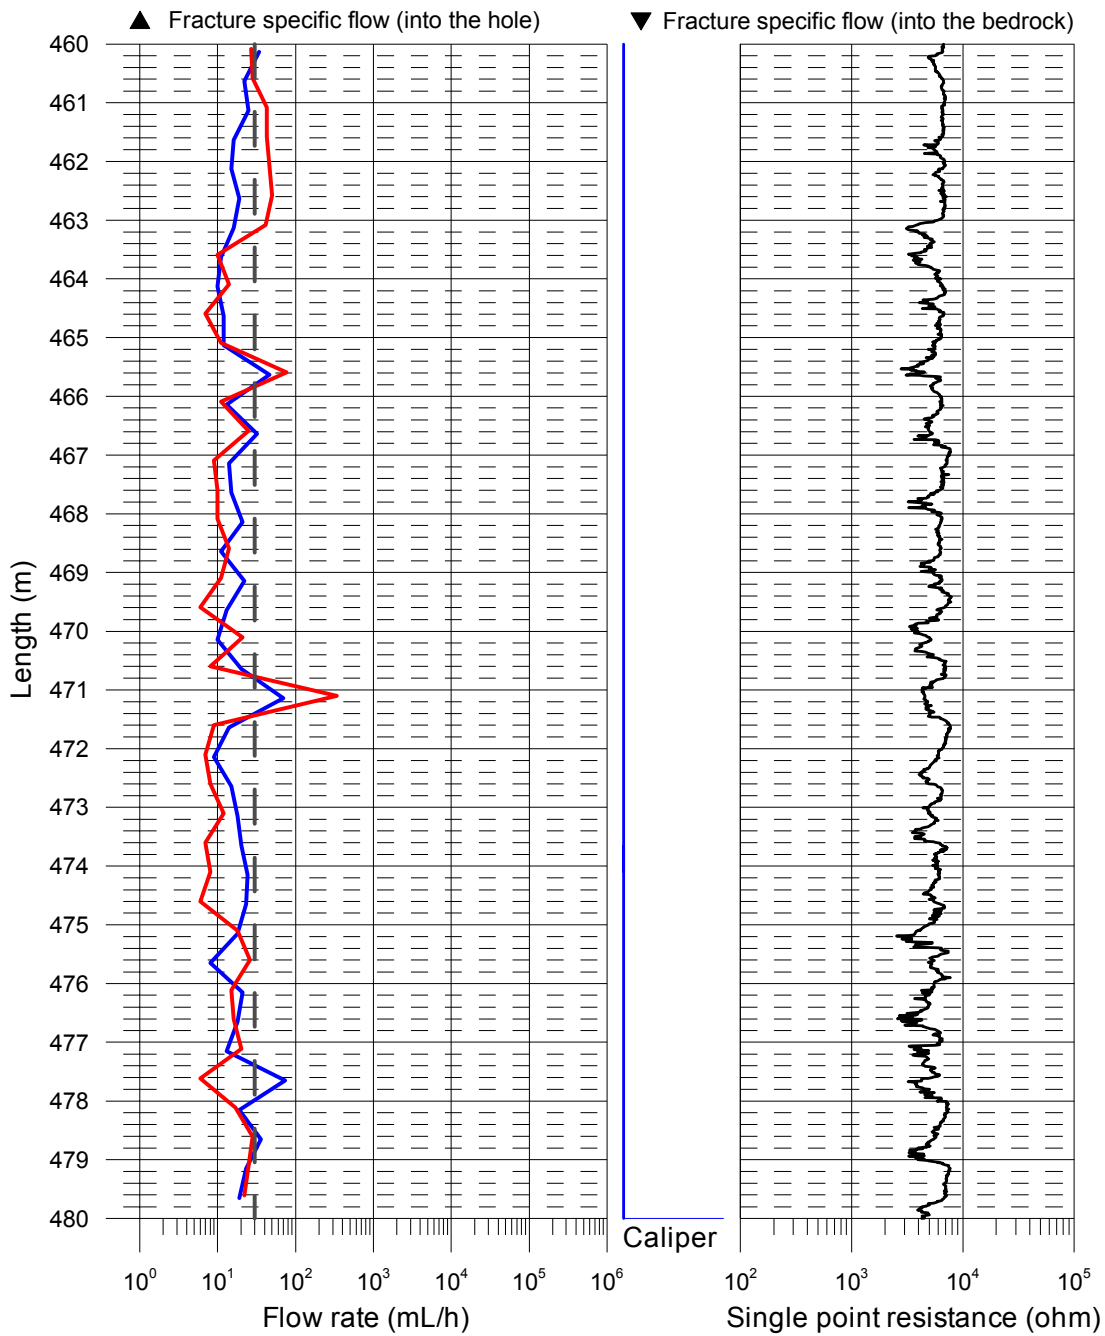


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

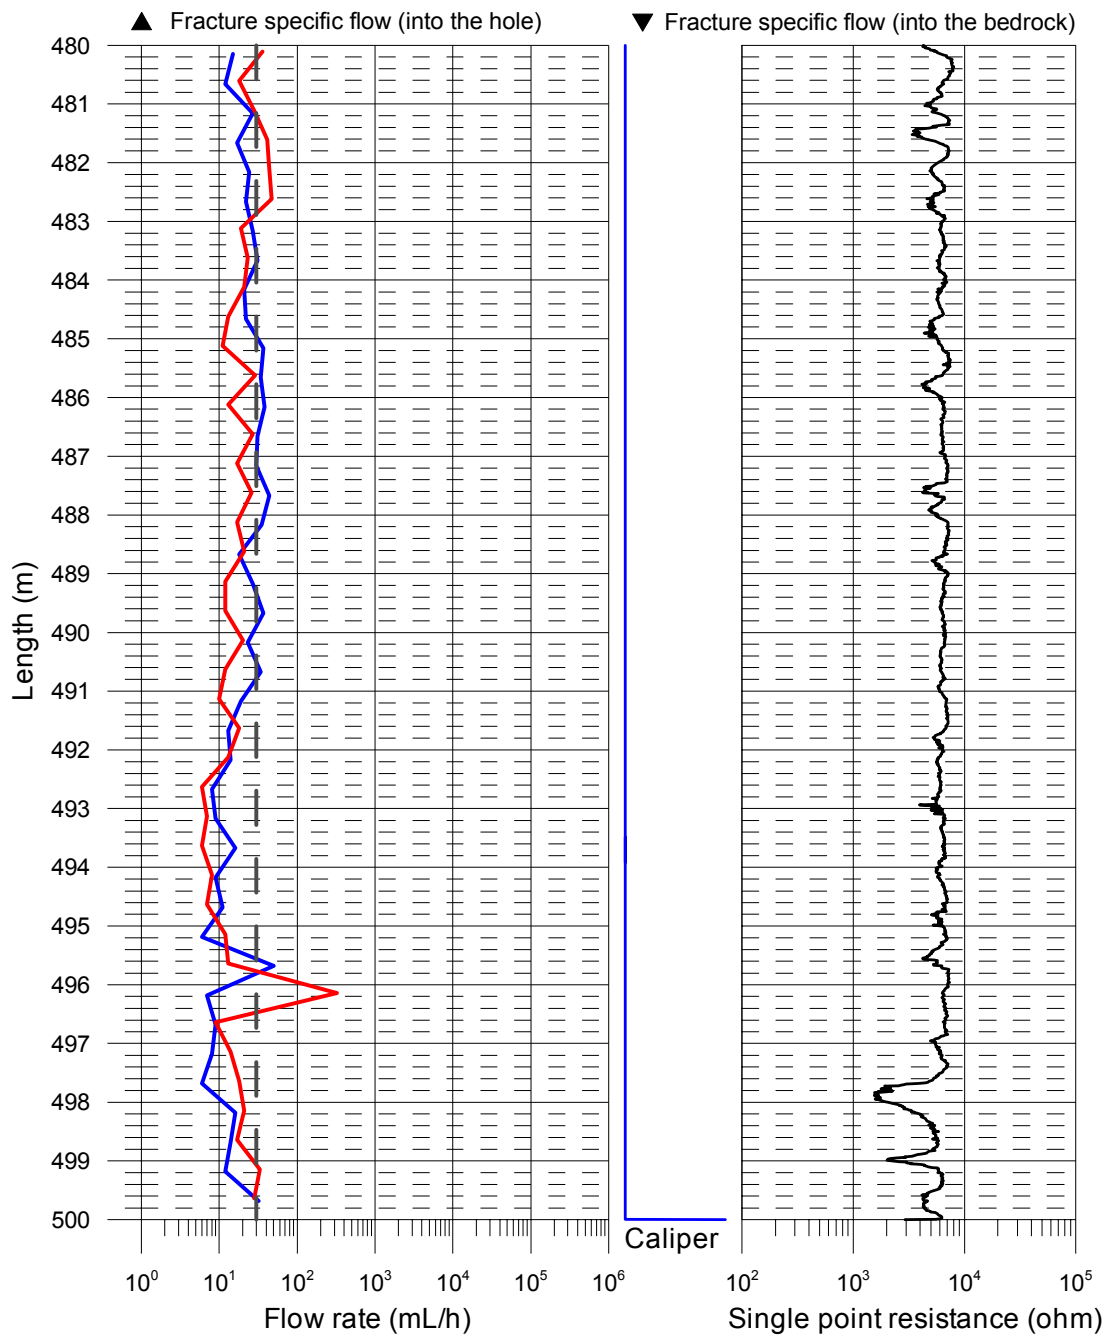


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

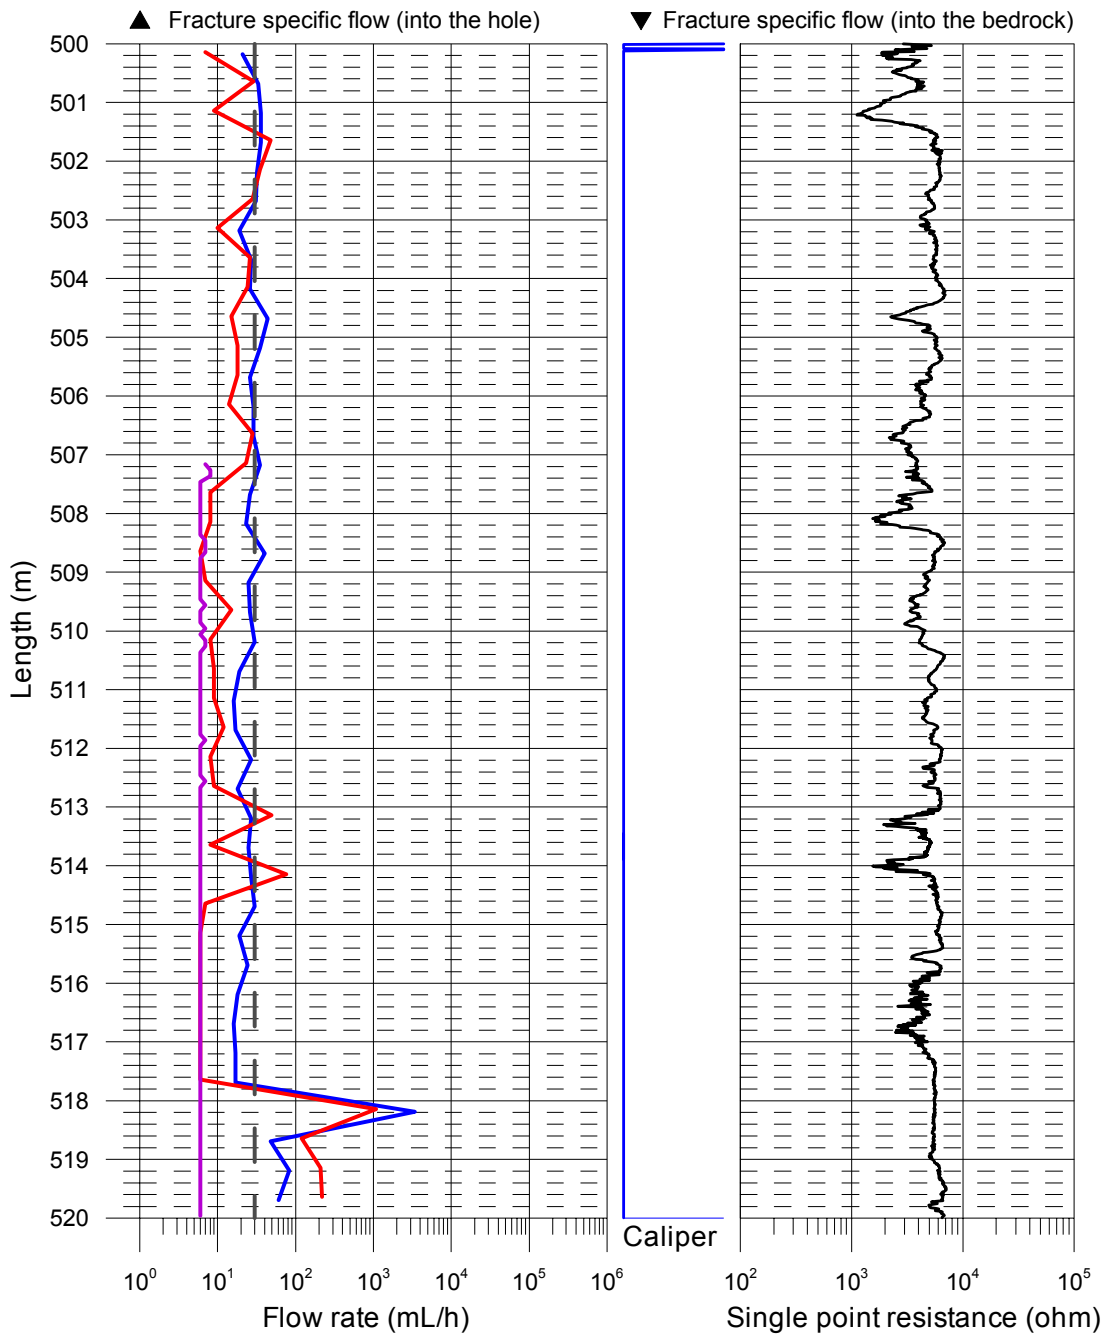


Laxemar, borehole KLX12A Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

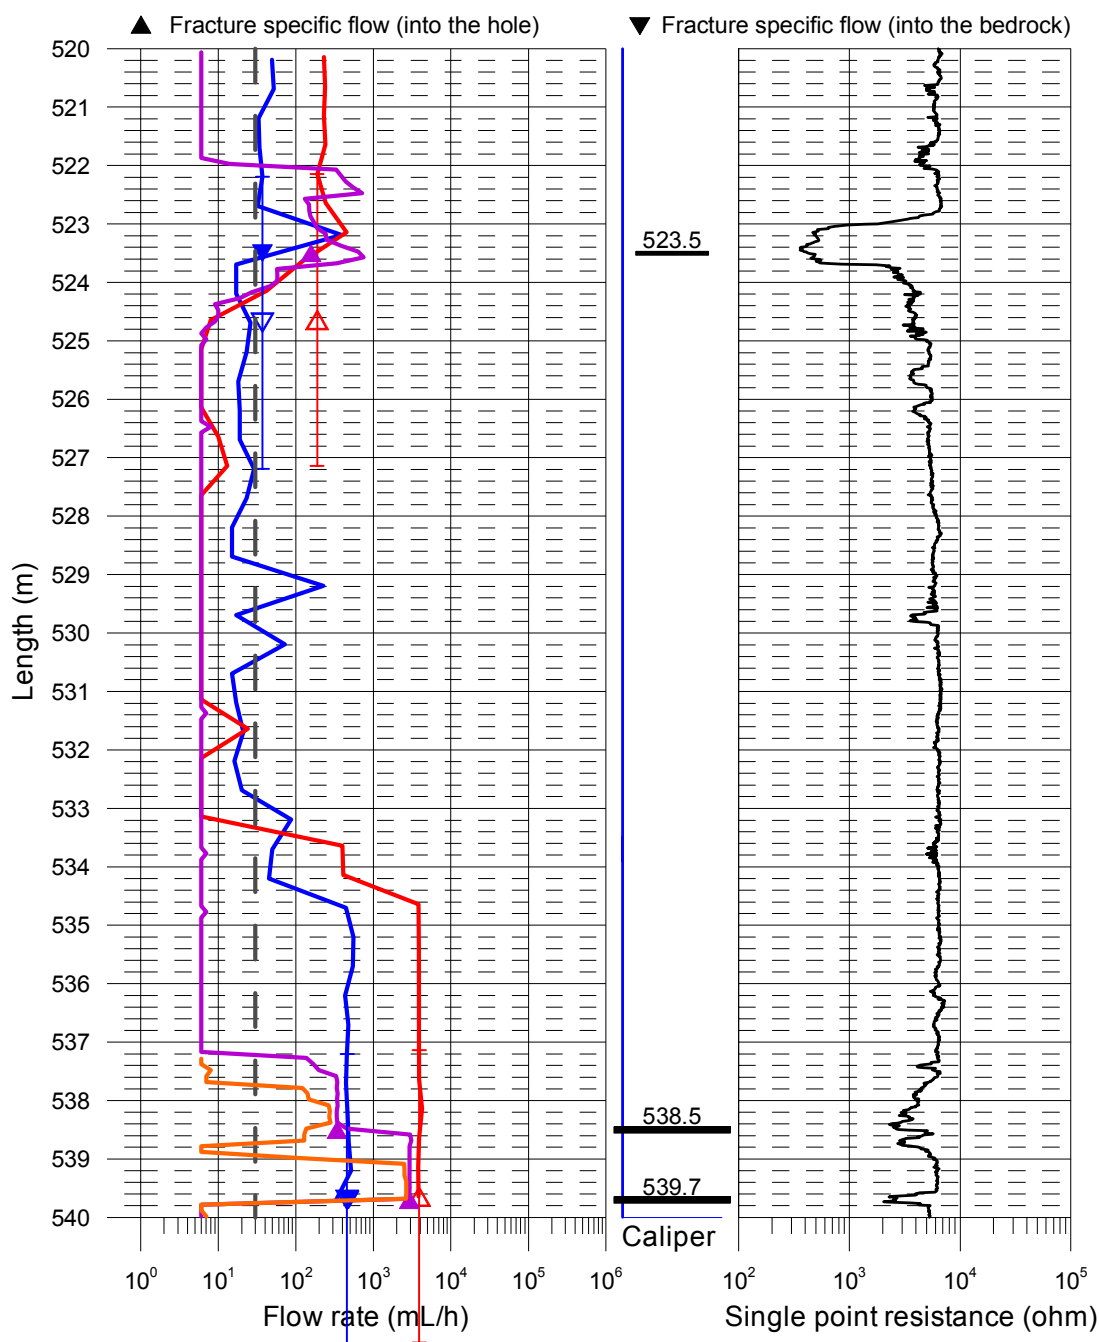


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance

- ▲ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▼ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- ▲ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

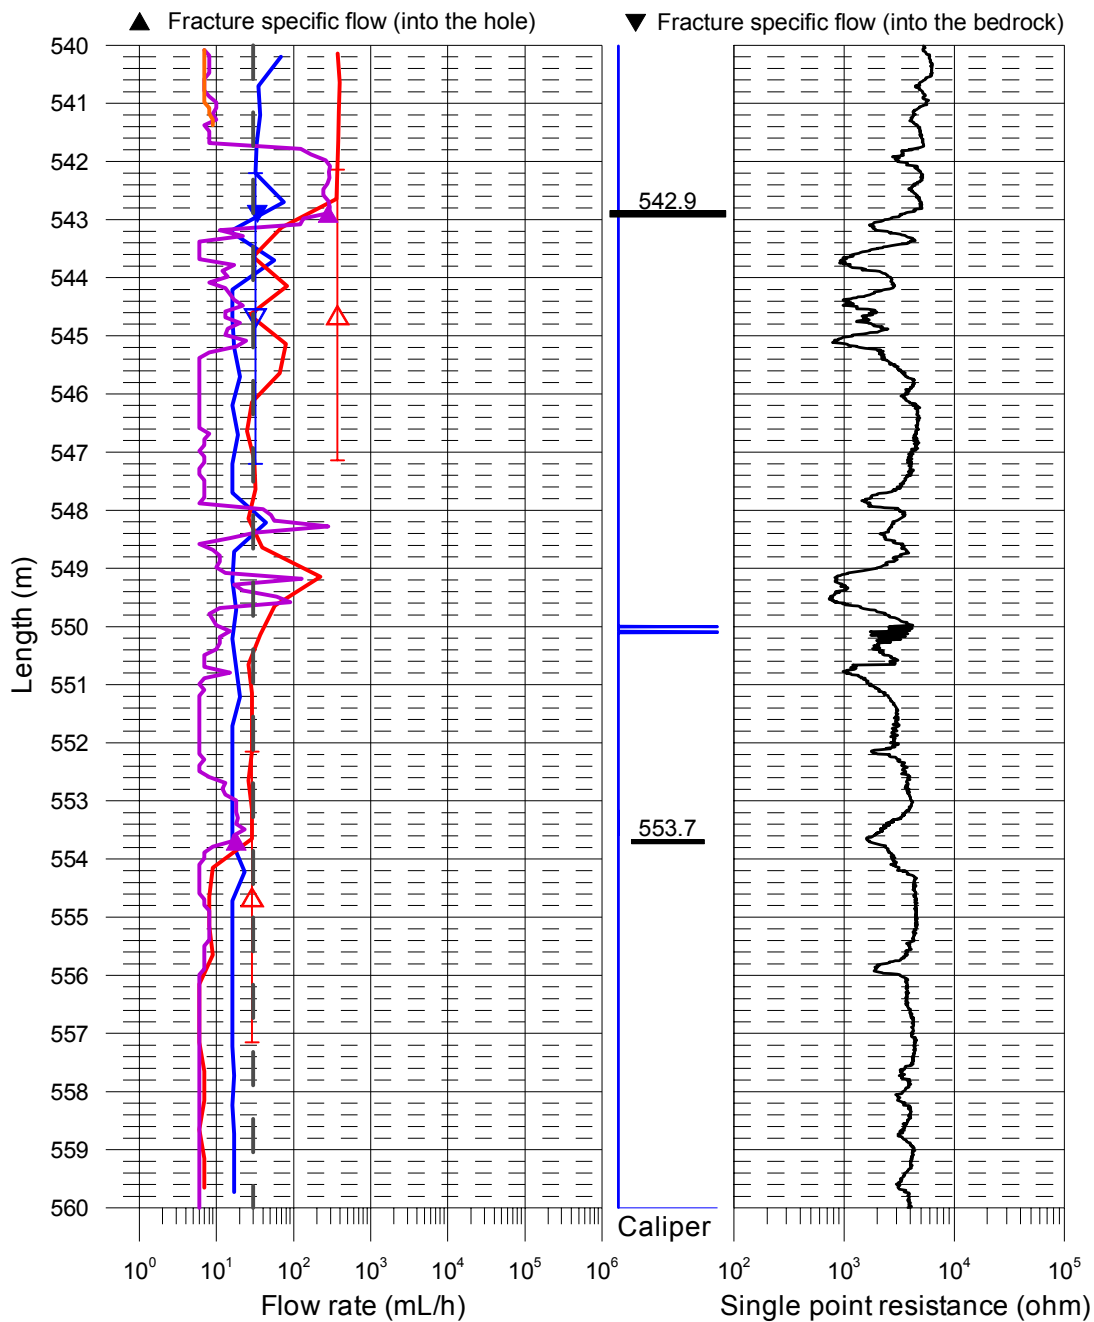


Laxemar, borehole KLX12A
 Flow rate, caliper and single point resistance

- △ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▽ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- △ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

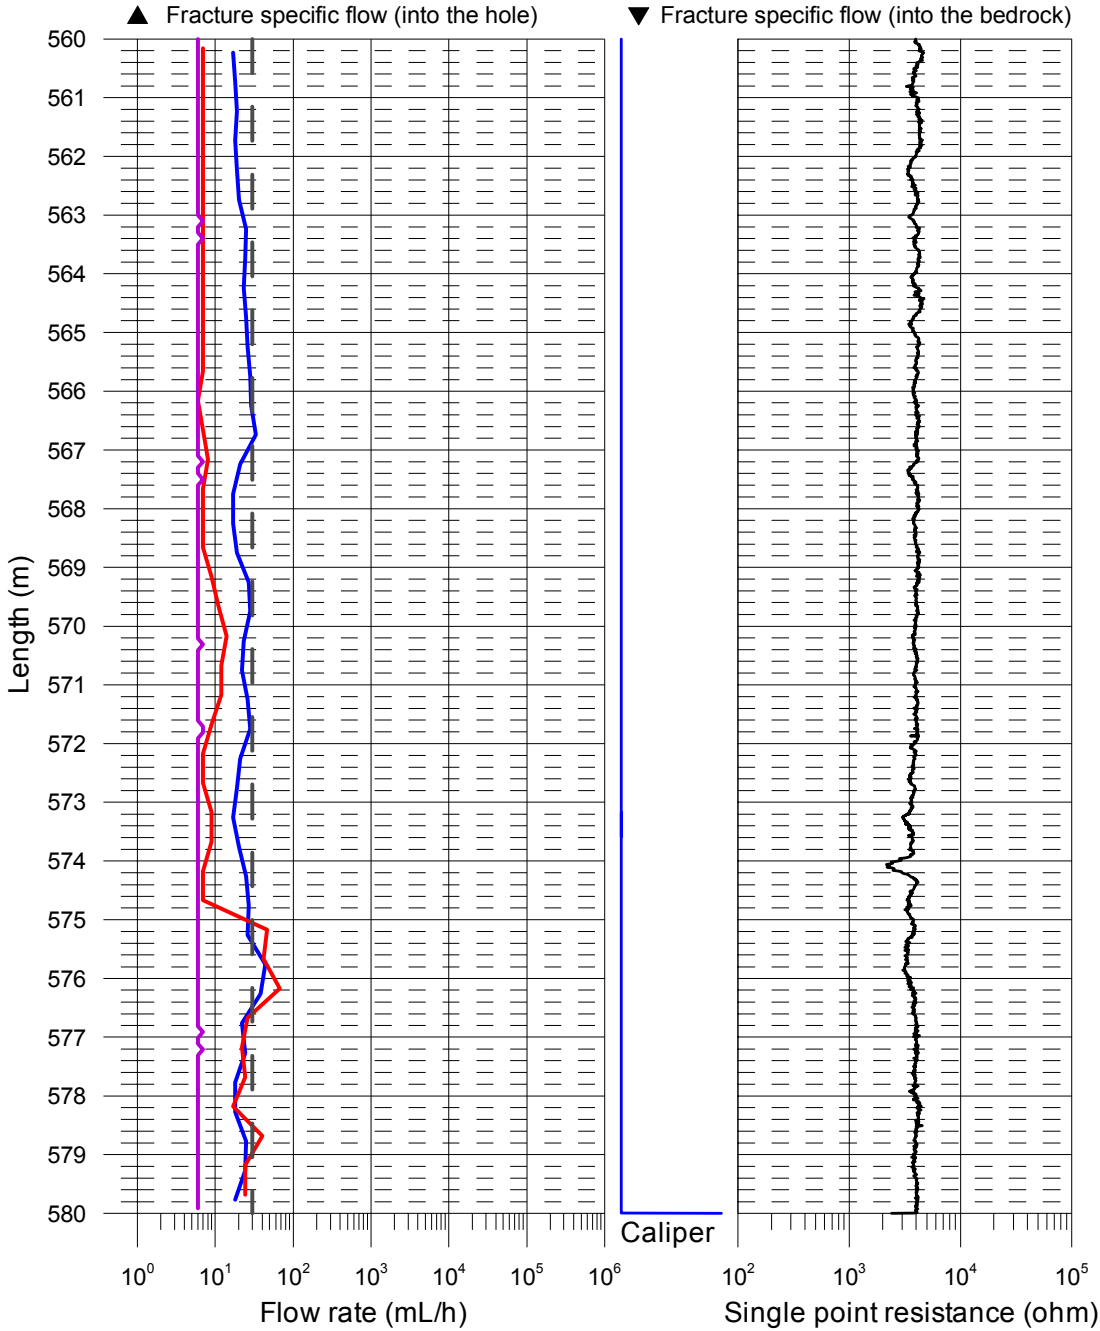


Laxemar, borehole KLX12A
Flow rate, caliper and single point resistance


- ▲ Without pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- ▼ Without pumping (L=5 m, dL=5 m), (Flow direction = into the bedrock)
- ▲ With pumping (L=5 m, dL=5 m), (Flow direction = into the hole)
- Without pumping (L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (Drawdown 9.5 m, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (Drawdown 9.5 m, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping during fracture-EC (Drawdown 9.5 m, L=0.5 m, dL=0.1 m), 2006-06-14 - 2006-06-15
- Lower limit of flow rate

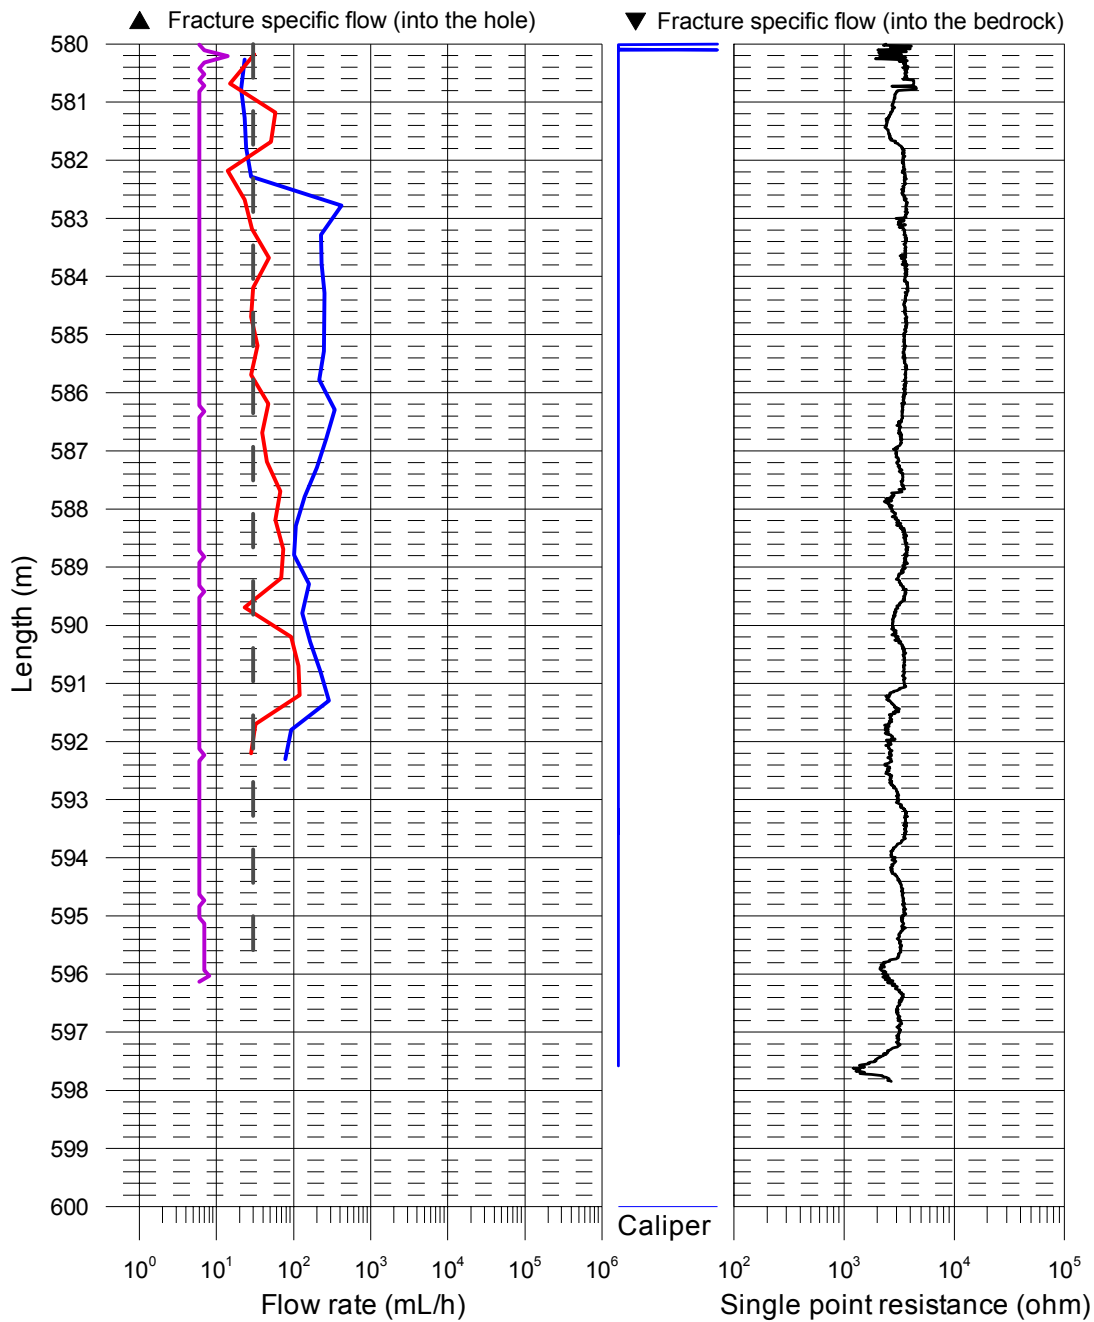

Laxemar, borehole KLX12A
Flow rates of 5 m sections

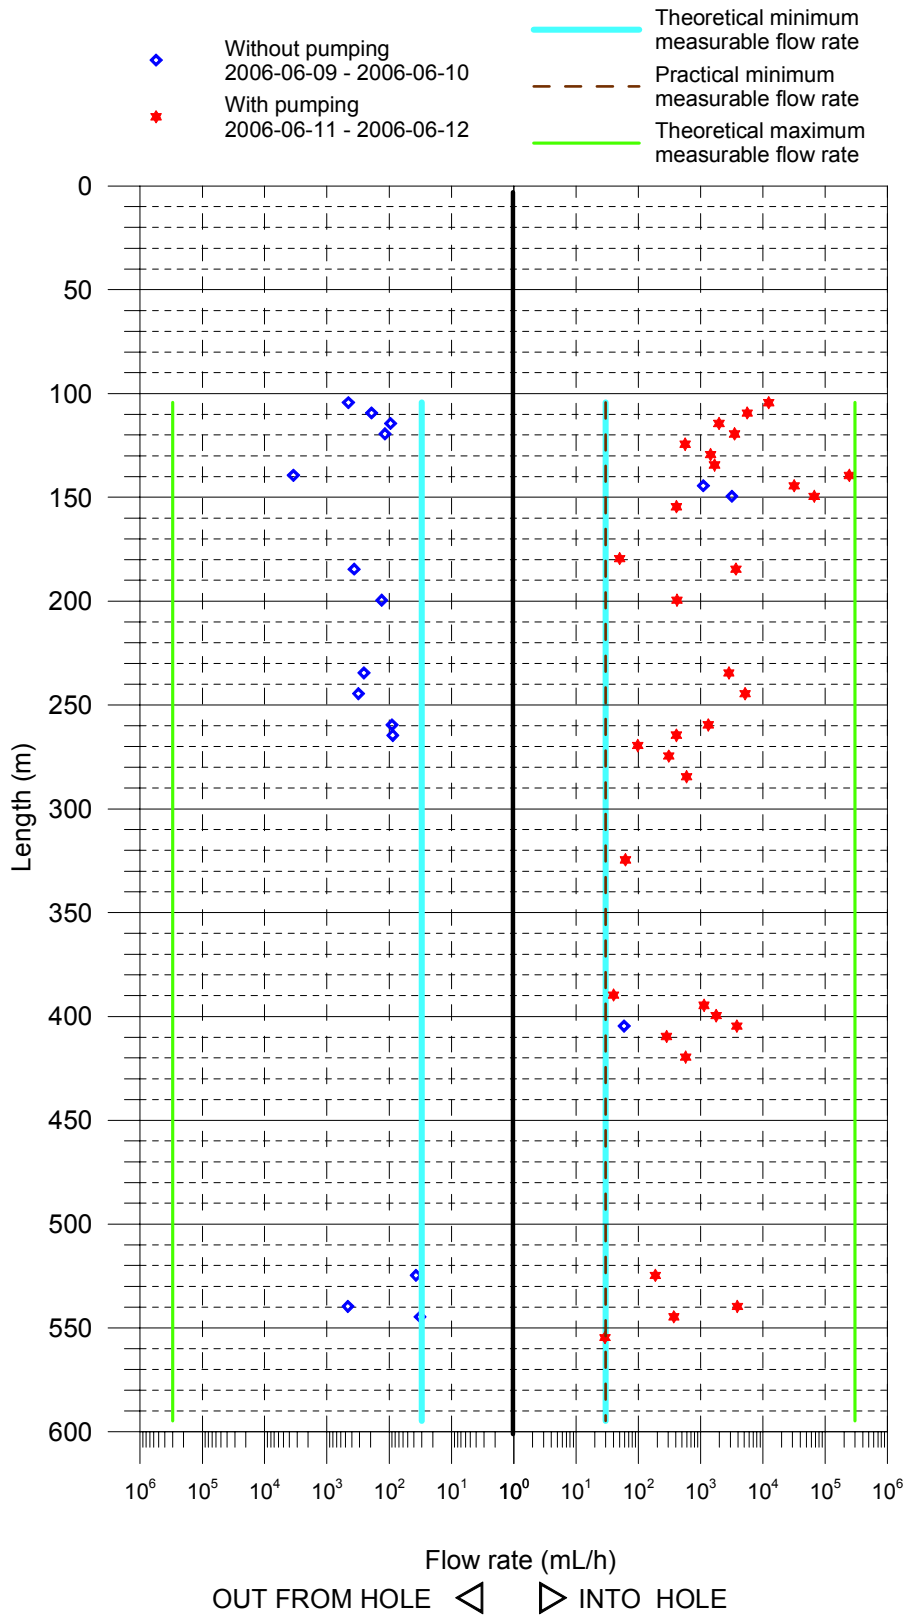


Laxemar, borehole KLX12A
 Transmissivity and head of 5 m sections

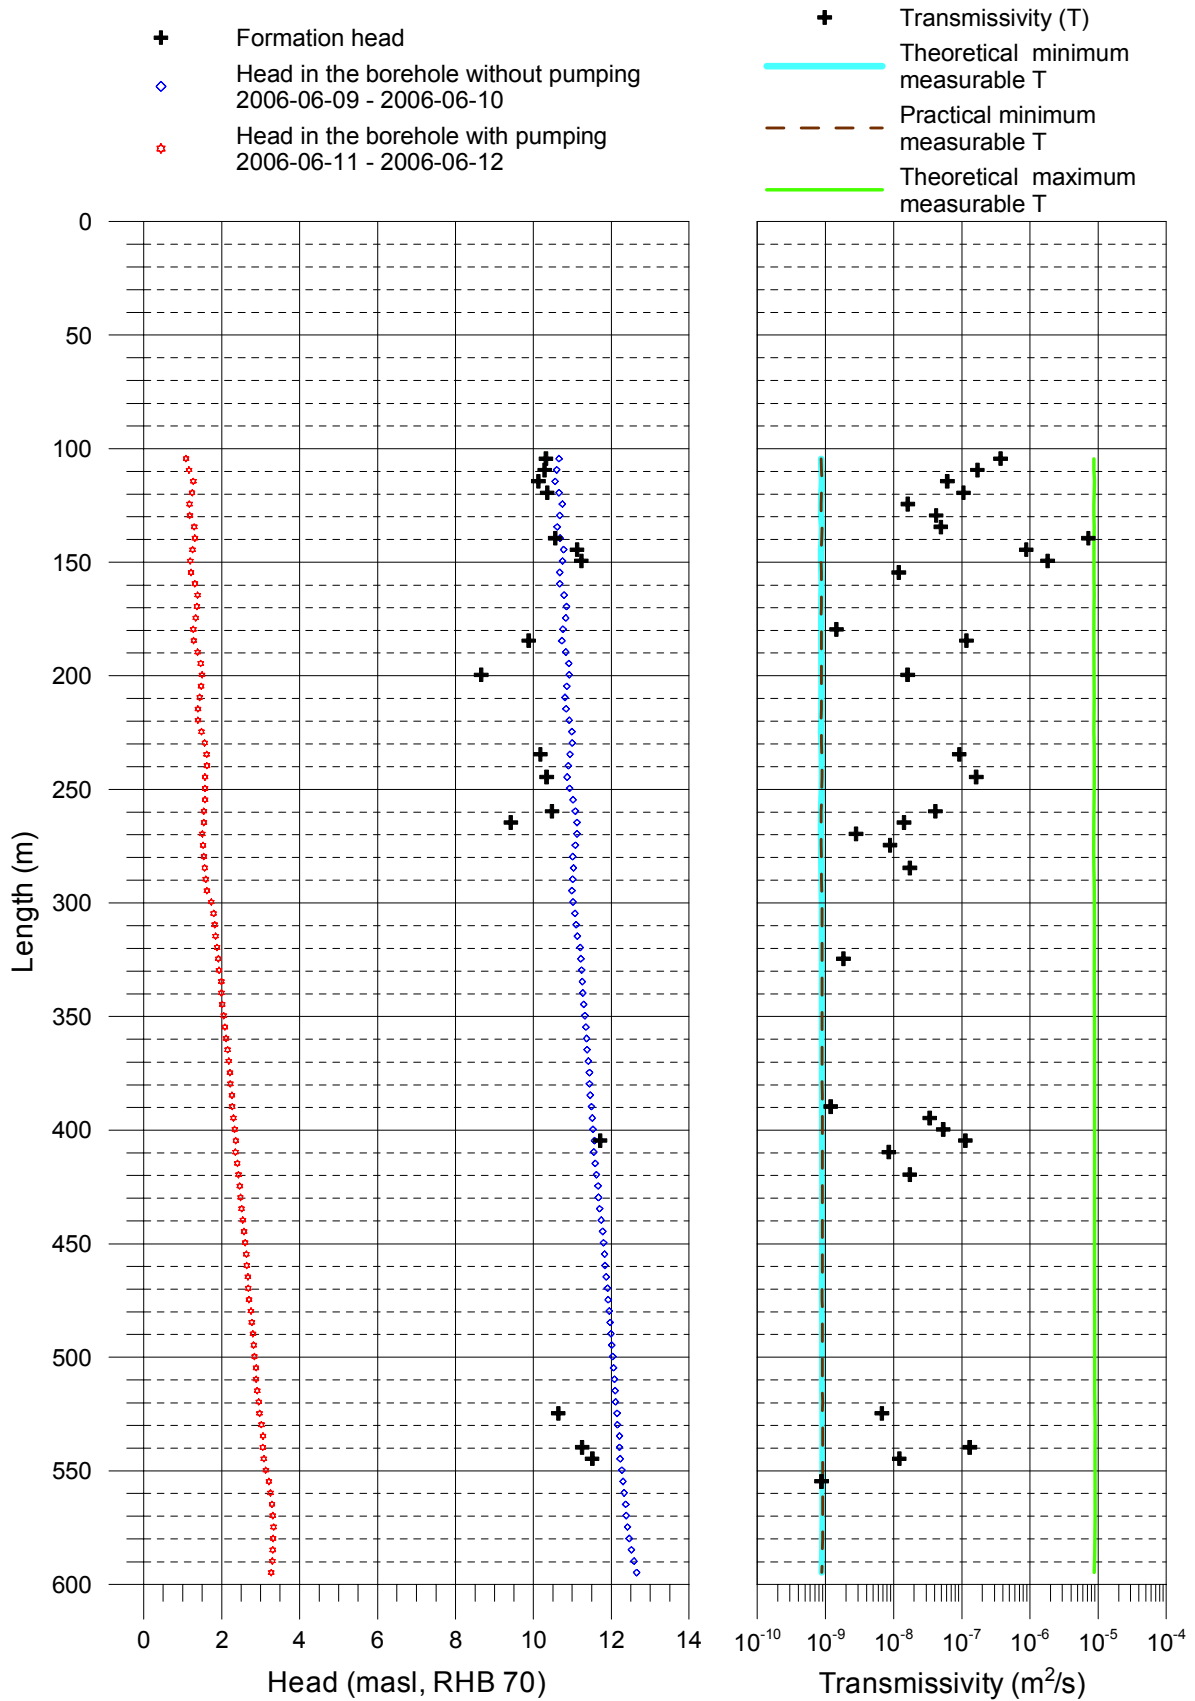

Laxemar, borehole KLX12A
 Transmissivity and head of detected fractures

- + Fracture head
- Head in the borehole without pumping (L=5 m, dL=0.5 m)
 2006-06-09 - 2006-06-10
- Head in the borehole with pumping (L=1 m, dL=0.1 m)
 2006-06-12 - 2006-06-14
- + Transmissivity of fracture

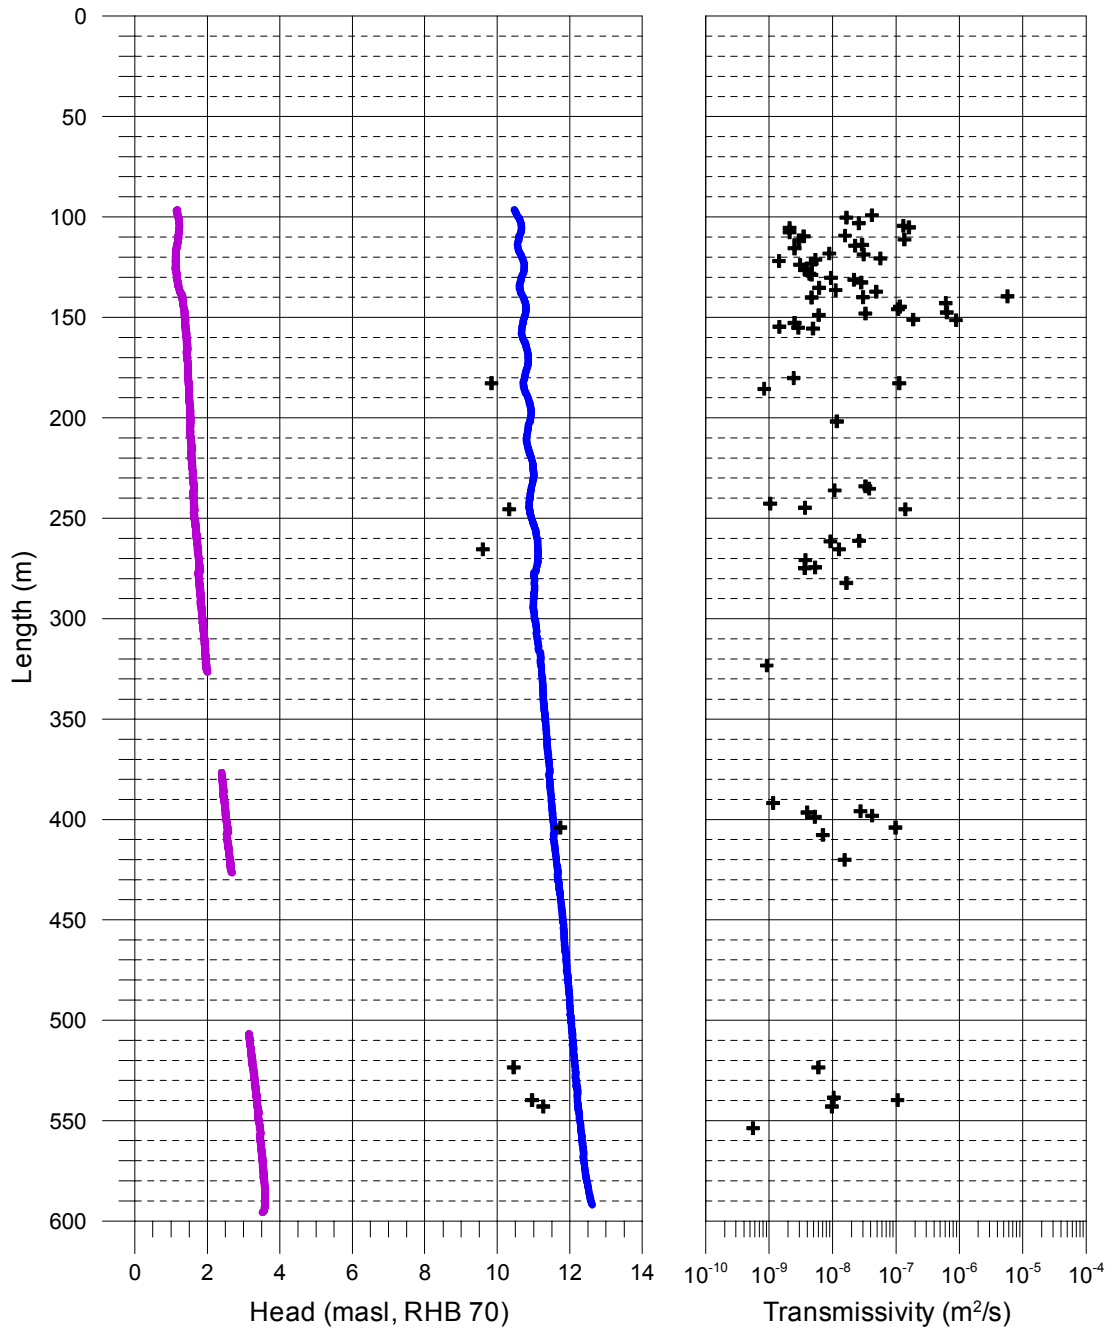

Basic test data

5. PFL-Difference flow logging – Basic test data.

Borehole ID	Logged interval		Test type	Date of test, start	Time of test, start	Date of flowl., start	Time of flowl., start	Date of test, stop	Time of test, stop	L _w	dL	Q _{p1}	Q _{p2}
	Secup (m)	Seclow (m)	(1–6)	YYYYMMDD	hh:mm	YYYYMMDD	hh:mm	YYYYMMDD	hh:mm	(m)	(m)	(m ³ /s)	(m ³ /s)
KLX12	102.13	602.29	5A	20060610	14:20	20060611	13:07	20060615	16:03	5	5	1.04E–4	–

Borehole ID	Logged interval		Test type	t _{p1}	t _{p2}	t _{F1}	t _{F2}	h ₀	h ₁	h ₂	s ₁	s ₂	T Entire hole	Reference	Comments
	Secup (m)	Seclow (m)	(1–6)	(s)	(s)	(s)	(s)	(m.a.s.l)	(m.a.s.l)	(m.a.s.l)	(m)	(m)	(m ² /s)	(–)	(–)
KLX12	102.13	602.29	5A	438,180	–	319,908		10.55	1.11	–	–9.44	–	1.09E–05		

Results of sequential flow logging

Difference flow logging – Sequential flow logging.

Borehole ID	Secup L (m)	Seclow L (m)	Lw (m)	Q ₀ (m ³ /s)	dh ₀ (m)	Q ₁ (m ³ /s)	dh ₁ (m)	TD (m ² /s)	h _i (m.a.s.l)	Q-lower limit P (mL/h)	TD-meas _{L,T} (m ² /s)	TD-meas _{L,P} (m ² /s)	TD-meas _{L,U} (m ² /s)	Comments
KLX12A	101.89	106.89	5	-1.26E-07	10.66	3.44E-06	1.08	3.69E-07	10.3	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	106.89	111.89	5	-5.33E-08	10.60	1.56E-06	1.16	1.69E-07	10.3	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	111.90	116.90	5	-2.64E-08	10.56	5.47E-07	1.27	6.11E-08	10.1	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	116.91	121.91	5	-3.25E-08	10.66	9.75E-07	1.24	1.06E-07	10.4	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	121.92	126.92	5	-	10.74	1.57E-07	1.17	1.62E-08	-	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	126.93	131.93	5	-	10.68	4.03E-07	1.18	4.19E-08	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	131.94	136.94	5	-	10.61	4.64E-07	1.29	4.92E-08	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	136.94	141.94	5	-9.56E-07	10.69	6.75E-05	1.31	7.22E-06	10.6	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	141.95	146.95	5	3.06E-07	10.78	8.81E-06	1.25	8.82E-07	11.1	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	146.96	151.96	5	8.83E-07	10.75	1.85E-05	1.19	1.82E-06	11.2	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	151.97	156.97	5	-	10.68	1.14E-07	1.21	1.19E-08	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	156.98	161.98	5	-	10.68	-	1.31	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	161.99	166.99	5	-	10.79	-	1.38	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	167.00	172.00	5	-	10.85	-	1.36	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	172.01	177.01	5	-	10.83	-	1.33	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	177.02	182.02	5	-	10.76	1.39E-08	1.27	1.45E-09	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	182.02	187.02	5	-1.01E-07	10.73	1.02E-06	1.28	1.18E-07	9.9	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	187.03	192.03	5	-	10.83	-	1.38	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	192.04	197.04	5	-	10.91	-	1.46	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	197.04	202.04	5	-3.67E-08	10.92	1.16E-07	1.49	1.60E-08	8.7	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	202.05	207.05	5	-	10.86	-	1.47	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	207.05	212.05	5	-	10.81	-	1.43	-	-	30	8.8E-10	8.8E-10	8.8E-06	

Borehole ID	Secup L (m)	Seclow L (m)	Lw (m)	Q ₀ (m ³ /s)	dh ₀ (m)	Q ₁ (m ³ /s)	dh ₁ (m)	TD (m ² /s)	h _i (m.a.s.l)	Q-lower limit P (mL/h)	TD-measl _{LT} (m ² /s)	TD-measl _{LP} (m ² /s)	TD-measl _U (m ² /s)	Comments
KLX12A	212.06	217.06	5	-	10.84	-	1.39	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	217.06	222.06	5	-	10.92	-	1.39	-	-	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	222.06	227.06	5	-	10.99	-	1.48	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	227.07	232.07	5	-	11.00	-	1.56	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	232.07	237.07	5	-7.06E-08	10.94	7.92E-07	1.61	9.14E-08	10.2	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	237.07	242.07	5	-	10.90	-	1.62	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	242.08	247.08	5	-8.67E-08	10.87	1.44E-06	1.57	1.63E-07	10.3	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	247.08	252.08	5	-	10.93	-	1.57	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	252.08	257.08	5	-	11.02	-	1.57	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	257.08	262.08	5	-2.50E-08	11.08	3.69E-07	1.54	4.09E-08	10.5	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	262.07	267.07	5	-2.44E-08	11.12	1.13E-07	1.54	1.42E-08	9.4	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	267.07	272.07	5	-	11.12	2.72E-08	1.50	2.80E-09	-	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	272.07	277.07	5	-	11.08	8.56E-08	1.52	8.85E-09	-	30	8.6E-10	8.6E-10	8.6E-06	
KLX12A	277.08	282.08	5	-	11.01	-	1.54	-	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	282.08	287.08	5	-	11.03	1.65E-07	1.56	1.72E-08	-	30	8.7E-10	8.7E-10	8.7E-06	
KLX12A	287.08	292.08	5	-	11.01	-	1.59	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	292.08	297.08	5	-	10.99	-	1.62	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	297.07	302.07	5	-	11.02	-	1.73	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	302.07	307.07	5	-	11.07	-	1.79	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	307.07	312.07	5	-	11.10	-	1.82	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	312.08	317.08	5	-	11.13	-	1.84	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	317.09	322.09	5	-	11.20	-	1.88	-	-	30	8.8E-10	8.8E-10	8.8E-06	
KLX12A	322.10	327.10	5	-	11.22	1.72E-08	1.91	1.83E-09	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	327.10	332.10	5	-	11.24	-	1.93	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	332.11	337.11	5	-	11.26	-	1.99	-	-	30	8.9E-10	8.9E-10	8.9E-06	

Borehole ID	Secup L (m)	Seclow L (m)	Lw (m)	Q ₀ (m ³ /s)	dh ₀ (m)	Q ₁ (m ³ /s)	dh ₁ (m)	TD (m ² /s)	h _i (m.a.s.l)	Q-lower limit P (mL/h)	TD-meas _{LT} (m ² /s)	TD-meas _{LP} (m ² /s)	TD-meas _{LU} (m ² /s)	Comments
KLX12A	337.11	342.11	5	–	11.27	–	1.99	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	342.12	347.12	5	–	11.29	–	2.01	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	347.12	352.12	5	–	11.32	–	2.05	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	352.12	357.12	5	–	11.35	–	2.08	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	357.13	362.13	5	–	11.37	–	2.11	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	362.13	367.13	5	–	11.38	–	2.15	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	367.13	372.13	5	–	11.41	–	2.18	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	372.13	377.13	5	–	11.44	–	2.21	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	377.14	382.14	5	–	11.44	–	2.22	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	382.14	387.14	5	–	11.46	–	2.26	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	387.14	392.14	5	–	11.49	1.11E–08	2.27	1.19E–09	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	392.15	397.15	5	–	11.51	3.14E–07	2.30	3.37E–08	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	397.15	402.15	5	–	11.53	4.94E–07	2.33	5.32E–08	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	402.15	407.15	5	1.64E–08	11.57	1.06E–06	2.36	1.12E–07	11.7	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	407.14	412.14	5	–	11.55	7.89E–08	2.35	8.48E–09	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	412.13	417.13	5	–	11.59	–	2.40	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	417.13	422.13	5	–	11.62	1.59E–07	2.43	1.72E–08	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	422.12	427.12	5	–	11.66	–	2.46	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	427.12	432.12	5	–	11.67	–	2.48	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	432.11	437.11	5	–	11.70	–	2.51	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	437.10	442.10	5	–	11.74	–	2.54	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	442.10	447.10	5	–	11.78	–	2.57	–	–	30	8.9E–10	8.9E–10	8.9E–06	
KLX12A	447.09	452.09	5	–	11.80	–	2.60	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	452.10	457.10	5	–	11.83	–	2.63	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	457.10	462.10	5	–	11.84	–	2.64	–	–	30	9.0E–10	9.0E–10	9.0E–06	
KLX12A	462.11	467.11	5	–	11.87	–	2.67	–	–	30	9.0E–10	9.0E–10	9.0E–06	

Borehole ID	Secup L (m)	Seclow L (m)	Lw (m)	Q ₀ (m ³ /s)	dh ₀ (m)	Q ₁ (m ³ /s)	dh ₁ (m)	TD (m ² /s)	h _i (m.a.s.l)	Q-lower limit P (mL/h)	TD-measl _{LT} (m ² /s)	TD-measl _{LP} (m ² /s)	TD-measl _U (m ² /s)	Comments
KLX12A	467.12	472.12	5	-	11.90	-	2.68	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	472.12	477.12	5	-	11.92	-	2.70	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	477.13	482.13	5	-	11.95	-	2.75	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	482.14	487.14	5	-	11.97	-	2.77	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	487.14	492.14	5	-	11.99	-	2.80	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	492.15	497.15	5	-	12.01	-	2.82	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	497.16	502.16	5	-	12.04	-	2.84	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	502.16	507.16	5	-	12.06	-	2.88	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	507.16	512.16	5	-	12.08	-	2.88	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	512.17	517.17	5	-	12.10	-	2.91	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	517.17	522.17	5	-	12.11	-	2.95	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	522.17	527.17	5	-1.03E-08	12.15	5.22E-08	2.97	6.73E-09	10.6	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	527.17	532.17	5	-	12.16	-	3.02	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	532.17	537.17	5	-	12.21	-	3.06	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	537.17	542.17	5	-1.27E-07	12.21	1.08E-06	3.05	1.30E-07	11.3	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	542.17	547.17	5	-8.89E-09	12.23	1.03E-07	3.08	1.21E-08	11.5	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	547.17	552.17	5	-	12.27	-	3.13	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	552.18	557.18	5	-	12.30	8.06E-09	3.21	8.77E-10	-	30	9.1E-10	9.1E-10	9.1E-06	
KLX12A	557.19	562.19	5	-	12.33	-	3.25	-	-	30	9.1E-10	9.1E-10	9.1E-06	
KLX12A	562.19	567.19	5	-	12.37	-	3.29	-	-	30	9.1E-10	9.1E-10	9.1E-06	
KLX12A	567.20	572.20	5	-	12.38	-	3.31	-	-	30	9.1E-10	9.1E-10	9.1E-06	
KLX12A	572.22	577.22	5	-	12.42	-	3.33	-	-	30	9.1E-10	9.1E-10	9.1E-06	
KLX12A	577.27	582.27	5	-	12.46	-	3.32	-	-	30	9.0E-10	9.0E-10	9.0E-06	
KLX12A	582.28	587.28	5	-	12.52	-	3.31	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	587.24	592.24	5	-	12.58	-	3.30	-	-	30	8.9E-10	8.9E-10	8.9E-06	
KLX12A	592.25	597.25	5	-	12.65	-	3.27	-	-	30	8.8E-10	8.8E-10	8.8E-06	

Appendix 8

Inferred flow anomalies from overlapping flow logging

PFL–Difference flow logging – Inferred flow anomalies from overlapping flow logging.

Borehole ID	Length to flow anom. L (m)	L _w (m)	dL (m)	Q ₀ (m ³ /s)	dh ₀ (m)	Q ₁ (m ³ /s)	dh ₁ (m)	TD (m ² /s)	h _i (m.a.s.l.)	Comments
KLX12A	99.1	1	0.1	–	10.54	3.94E–07	1.18	4.2E–08	–	*
KLX12A	100.3	1	0.1	–	10.59	1.57E–07	1.21	1.7E–08	–	
KLX12A	103.1	1	0.1	–	10.65	2.48E–07	1.23	2.6E–08	–	
KLX12A	104.4	1	0.1	–	10.66	1.24E–06	1.23	1.3E–07	–	
KLX12A	105.2	1	0.1	–	10.66	1.53E–06	1.22	1.6E–07	–	
KLX12A	105.5	1	0.1	–	10.66	2.00E–08	1.23	2.1E–09	–	*
KLX12A	107.6	1	0.1	–	10.65	2.00E–08	1.22	2.1E–09	–	*
KLX12A	109.3	1	0.1	–	10.61	1.50E–07	1.20	1.6E–08	–	
KLX12A	109.7	1	0.1	–	10.61	3.33E–08	1.21	3.5E–09	–	*
KLX12A	111.3	1	0.1	–	10.59	1.30E–06	1.18	1.4E–07	–	
KLX12A	111.6	1	0.1	–	10.58	2.83E–08	1.19	3.0E–09	–	*
KLX12A	113.8	1	0.1	–	10.55	2.78E–07	1.16	2.9E–08	–	
KLX12A	114.3	1	0.1	–	10.56	2.14E–07	1.16	2.3E–08	–	
KLX12A	115.6	1	0.1	–	10.57	2.39E–08	1.15	2.5E–09	–	*
KLX12A	118.2	1	0.1	–	10.63	8.56E–08	1.14	8.9E–09	–	*
KLX12A	118.7	1	0.1	–	10.65	2.97E–07	1.13	3.1E–08	–	
KLX12A	120.7	1	0.1	–	10.69	5.50E–07	1.13	5.7E–08	–	
KLX12A	121.3	1	0.1	–	10.71	5.22E–08	1.12	5.4E–09	–	
KLX12A	121.9	1	0.1	–	10.72	1.39E–08	1.13	1.4E–09	–	*
KLX12A	123.2	1	0.1	–	10.74	4.56E–08	1.13	4.7E–09	–	
KLX12A	123.8	1	0.1	–	10.74	3.00E–08	1.13	3.1E–09	–	
KLX12A	125.8	1	0.1	–	10.74	3.81E–08	1.13	3.9E–09	–	*
KLX12A	126.4	1	0.1	–	10.74	3.58E–08	1.13	3.7E–09	–	*
KLX12A	128.3	1	0.1	–	10.71	4.17E–08	1.16	4.3E–09	–	*
KLX12A	128.8	1	0.1	–	10.70	4.50E–08	1.15	4.7E–09	–	
KLX12A	130.3	1	0.1	–	10.66	9.08E–08	1.16	9.5E–09	–	*
KLX12A	131.3	1	0.1	–	10.65	2.11E–07	1.16	2.2E–08	–	
KLX12A	132.6	1	0.1	–	10.63	2.71E–07	1.18	2.8E–08	–	
KLX12A	135.3	1	0.1	–	10.62	5.83E–08	1.21	6.1E–09	–	
KLX12A	136.4	1	0.1	–	10.64	1.06E–07	1.23	1.1E–08	–	
KLX12A	137.2	1	0.1	–	10.64	4.61E–07	1.25	4.9E–08	–	
KLX12A	139.5	1	0.1	–	10.70	5.47E–05	1.30	5.8E–06	–	
KLX12A	139.9	1	0.1	–	10.72	2.89E–07	1.30	3.0E–08	–	*
KLX12A	140.1	1	0.1	–	10.72	4.44E–08	1.31	4.7E–09	–	*
KLX12A	142.9	1	0.1	–	10.78	5.83E–06	1.33	6.1E–07	–	
KLX12A	144.7	1	0.1	–	10.78	1.10E–06	1.34	1.2E–07	–	
KLX12A	145.9	1	0.1	–	10.79	1.03E–06	1.35	1.1E–07	–	
KLX12A	147.5	1	0.1	–	10.78	6.03E–06	1.37	6.3E–07	–	
KLX12A	148.1	1	0.1	–	10.78	3.14E–07	1.37	3.3E–08	–	
KLX12A	148.8	1	0.1	–	10.77	5.75E–08	1.37	6.1E–09	–	
KLX12A	151.1	1	0.1	–	10.73	1.76E–06	1.39	1.9E–07	–	*
KLX12A	151.4	1	0.1	–	10.72	8.36E–06	1.39	8.9E–07	–	
KLX12A	152.8	1	0.1	–	10.71	2.36E–08	1.39	2.5E–09	–	
KLX12A	154.7	1	0.1	–	10.68	1.36E–08	1.39	1.5E–09	–	*

Borehole ID	Length to flow anom. L (m)	L _w (m)	dL (m)	Q ₀ (m ³ /s)	dh ₀ (m)	Q ₁ (m ³ /s)	dh ₁ (m)	TD (m ² /s)	h _i (m.a.s.l.)	Comments
KLX12A	155.1	1	0.1	–	10.68	2.69E–08	1.40	2.9E–09	–	*
KLX12A	155.6	1	0.1	–	10.68	4.61E–08	1.40	4.9E–09	–	*
KLX12A	180.2	1	0.1	–	10.75	2.28E–08	1.47	2.4E–09	–	
KLX12A	182.8	1	0.1	–1.01E–07	10.72	9.58E–07	1.47	1.1E–07	9.8	
KLX12A	185.6	1	0.1	–	10.74	7.78E–09	1.50	8.3E–10	–	*
KLX12A	201.8	1	0.1	–	10.91	1.11E–07	1.54	1.2E–08	–	
KLX12A	234.1	1	0.1	–	10.95	3.11E–07	1.62	3.3E–08	–	
KLX12A	235.3	1	0.1	–	10.93	3.56E–07	1.63	3.8E–08	–	
KLX12A	236.1	1	0.1	–	10.92	1.01E–07	1.63	1.1E–08	–	
KLX12A	242.8	1	0.1	–	10.88	9.72E–09	1.64	1.0E–09	–	
KLX12A	244.8	1	0.1	–	10.87	3.44E–08	1.64	3.7E–09	–	
KLX12A	245.6	1	0.1	–7.94E–08	10.89	1.24E–06	1.64	1.4E–07	10.3	
KLX12A	261.2	1	0.1	–	11.12	2.51E–07	1.71	2.6E–08	–	
KLX12A	261.5	1	0.1	–	11.11	8.83E–08	1.71	9.3E–09	–	*
KLX12A	265.5	1	0.1	–1.97E–08	11.13	1.01E–07	1.74	1.3E–08	9.6	
KLX12A	270.8	1	0.1	–	11.12	3.53E–08	1.76	3.7E–09	–	
KLX12A	274.5	1	0.1	–	11.08	5.00E–08	1.78	5.3E–09	–	
KLX12A	274.8	1	0.1	–	11.08	3.44E–08	1.78	3.7E–09	–	*
KLX12A	282.3	1	0.1	–	11.02	1.55E–07	1.78	1.7E–08	–	
KLX12A	323.3	1	0.1	–	11.21	8.61E–09	1.97	9.2E–10	–	
KLX12A	391.8	1	0.1	–	11.50	1.06E–08	2.48	1.2E–09	–	
KLX12A	395.9	1	0.1	–	11.52	2.52E–07	2.50	2.8E–08	–	
KLX12A	396.5	1	0.1	–	11.53	3.64E–08	2.50	4.0E–09	–	*
KLX12A	398.1	1	0.1	–	11.53	3.86E–07	2.50	4.2E–08	–	
KLX12A	398.7	1	0.1	–	11.53	4.81E–08	2.50	5.3E–09	–	
KLX12A	404.0	1	0.1	1.72E–08	11.57	9.11E–07	2.57	9.8E–08	11.7	
KLX12A	407.7	1	0.1	–	11.56	6.39E–08	2.54	7.0E–09	–	
KLX12A	420.1	1	0.1	–	11.63	1.41E–07	2.62	1.6E–08	–	
KLX12A	523.5	1	0.1	–1.03E–08	12.15	4.36E–08	3.25	6.0E–09	10.5	*
KLX12A	538.5	1	0.1	–	12.21	9.42E–08	3.37	1.1E–08	–	
KLX12A	539.7	1	0.1	–1.34E–07	12.21	8.11E–07	3.37	1.1E–07	11.0	
KLX12A	542.9	1	0.1	–9.44E–09	12.23	7.75E–08	3.39	9.7E–09	11.3	
KLX12A	553.7	1	0.1	–	12.30	5.00E–09	3.45	5.6E–10	–	*

* Uncertain = The flow rate is less than 30 mL/h or the flow anomalies are overlapping or they are unclear because of noise.

Explanations for the tables in Appendices 6–8

Header	Unit	Explanations
Borehole		ID for borehole
Secup	m	Length along the borehole for the upper limit of the test section (based on corrected length L)
Seclow	m	Length along the borehole for the lower limit of the test section (based on corrected length L)
L	m	Corrected length along borehole based on SKB procedures for length correction
Length to flow anom.	m	Length along the borehole to inferred flow anomaly during overlapping flow logging
Test type (1–6)	(–)	1A: Pumping test – wire-line eq., 1B: Pumping test-submersible pump, 1C: Pumping test-airlift pumping, 2: Interference test, 3: Injection test, 4: Slug test, 5A: Difference flow logging – PFL-DIFF-Sequential, 5B: Difference flow logging – PFL-DIFF-Overlapping, 6: Flow logging-Impeller
Date of test, start	YY-MM-DD	Date for start of pumping
Time of test, start	hh:mm	Time for start of pumping
Date of flowl., start	YY-MM-DD	Date for start of the flow logging
Time of flowl., start	hh:mm	Time for start of the flow logging
Date of test, stop	YY-MM-DD	Date for stop of the test
Time of test, stop	hh:mm	Time for stop of the test
L_w	m	Section length used in the difference flow logging
dL	m	Step length (increment) used in the difference flow logging
Q_{p1}	m ³ /s	Flow rate at surface by the end of the first pumping period of the flow logging
Q_{p2}	m ³ /s	Flow rate at surface by the end of the second pumping period of the flow logging
tp_1	s	Duration of the first pumping period
tp_2	s	Duration of the second pumping period
t_{F1}	s	Duration of the first recovery period
t_{F2}	s	Duration of the second recovery period
h_0	m a.s.l.	Initial hydraulic head before pumping. Elevation of water level in open borehole in the local co-ordinates system with $z = 0$ m
h_1	m a.s.l.	Stabilised hydraulic head during the first pumping period. Elevation of water level in open borehole in the local co-ordinates system with $z = 0$ m
h_2	m.a.s.l.	Stabilised hydraulic head during the second pumping period. Elevation of water level in open borehole in the local co-ordinates system with $z = 0$ m
s_1	m	Drawdown of the water level in the borehole during first pumping period. Difference between the actual hydraulic head and the initial head ($s_1 = h_1 - h_0$)
s_2	m	Drawdown of the water level in the borehole during second pumping period. Difference between the actual hydraulic head and the initial head ($s_2 = h_2 - h_0$)
T	m ² /s	Transmissivity of the entire borehole
Q_0	m ³ /s	Measured flow rate through the test section or flow anomaly under natural conditions (no pumping) with $h = h_0$ in the open borehole
Q_1	m ³ /s	Measured flow rate through the test section or flow anomaly during the first pumping period
Q_2	m ³ /s	Measured flow rate through the test section or flow anomaly during the second pumping period

Header	Unit	Explanations
dh ₀	m	Corrected initial hydraulic head difference along the hole due to e.g. varying salinity conditions of the borehole fluid before pumping
dh ₁	m	Corrected hydraulic head difference along the hole due to e.g. varying salinity conditions of the borehole fluid during the first pumping period
dh ₂	m	Corrected hydraulic head difference along the hole due to e.g. varying salinity conditions of the borehole fluid during the second pumping period
EC _w	S/m	Measured electric conductivity of the borehole fluid in the test section during difference flow logging
Te _w	°C	Measured borehole fluid temperature in the test section during difference flow logging
EC _f	S/m	Measured fracture-specific electric conductivity of the fluid in flow anomaly during difference flow logging
Te _f	°C	Measured fracture-specific fluid temperature in flow anomaly during difference flow logging
T _D	m ² /s	Transmissivity of section or flow anomaly based on 2D model for evaluation of formation properties of the test section based on PFL-DIFF
T-meas _{LT}	m ² /s	Estimated theoretical lower measurement limit for evaluated TD. If the estimated TD equals TD-measlim, the actual TD is considered to be equal or less than TD-measlim
T-meas _{LP}	m ² /s	Estimated practical lower measurement limit for evaluated TD. If the estimated TD equals TD-measlim, the actual TD is considered to be equal or less than TD-measlim
T-meas _U	m ² /s	Estimated upper measurement limit for evaluated TD. If the estimated TD equals TD-measlim, the actual TD is considered to be equal or less than TD-measlim
h _i	m	Calculated relative, natural freshwater head for test section or flow anomaly (undisturbed conditions)

Calculation of conductive fracture frequency.

Conductive fracture frequency


Calculation of conductive fracture frequency.

Borehole ID	SecUp (m)	SecLow (m)	Number of fractures, Total	Number of fractures 10–100 (ml/h)	Number of fractures 100–1,000 (ml/h)	Number of fractures 1,000–10,000 (ml/h)	Number of fractures 10,000–100,000 (ml/h)	Number of fractures 100,000–1,000,000 (ml/h)
KLX12A	101.89	106.89	4	1	1	2	0	0
KLX12A	106.89	111.89	5	1	3	1	0	0
KLX12A	111.90	116.90	3	1	2	0	0	0
KLX12A	116.91	121.91	5	1	2	2	0	0
KLX12A	121.92	126.92	4	0	4	0	0	0
KLX12A	126.93	131.93	4	0	4	0	0	0
KLX12A	131.94	136.94	3	0	3	0	0	0
KLX12A	136.94	141.94	4	0	1	2	0	0
KLX12A	141.95	146.95	3	0	0	2	1	1
KLX12A	146.96	151.96	5	0	1	2	2	2
KLX12A	151.97	156.97	4	3	1	0	0	0
KLX12A	156.98	161.98	0	0	0	0	0	0
KLX12A	161.99	166.99	0	0	0	0	0	0
KLX12A	167.00	172.00	0	0	0	0	0	0
KLX12A	172.01	177.01	0	0	0	0	0	0
KLX12A	177.02	182.02	1	1	0	0	0	0
KLX12A	182.02	187.02	2	1	0	1	0	0
KLX12A	187.03	192.03	0	0	0	0	0	0
KLX12A	192.04	197.04	0	0	0	0	0	0
KLX12A	197.04	202.04	1	0	1	0	0	0
KLX12A	202.05	207.05	0	0	0	0	0	0
KLX12A	207.05	212.05	0	0	0	0	0	0
KLX12A	212.06	217.06	0	0	0	0	0	0
KLX12A	217.06	222.06	0	0	0	0	0	0
KLX12A	222.06	227.06	0	0	0	0	0	0
KLX12A	227.07	232.07	0	0	0	0	0	0
KLX12A	232.07	237.07	3	0	1	2	0	0
KLX12A	237.07	242.07	0	0	0	0	0	0
KLX12A	242.08	247.08	3	1	1	1	0	0
KLX12A	247.08	252.08	0	0	0	0	0	0
KLX12A	252.08	257.08	0	0	0	0	0	0
KLX12A	257.08	262.08	2	0	2	0	0	0
KLX12A	262.07	267.07	1	0	1	0	0	0
KLX12A	267.07	272.07	1	0	1	0	0	0
KLX12A	272.07	277.07	2	0	2	0	0	0
KLX12A	277.08	282.08	0	0	0	0	0	0
KLX12A	282.08	287.08	1	0	1	0	0	0
KLX12A	287.08	292.08	0	0	0	0	0	0
KLX12A	292.08	297.08	0	0	0	0	0	0
KLX12A	297.07	302.07	0	0	0	0	0	0


Borehole ID	SecUp (m)	SecLow (m)	Number of fractures, Total	Number of fractures 10–100 (ml/h)	Number of fractures 100–1,000 (ml/h)	Number of fractures 1,000–10,000 (ml/h)	Number of fractures 10,000–100,000 (ml/h)	Number of fractures 100,000–1,000,000 (ml/h)
KLX12A	302.07	307.07	0	0	0	0	0	0
KLX12A	307.07	312.07	0	0	0	0	0	0
KLX12A	312.08	317.08	0	0	0	0	0	0
KLX12A	317.09	322.09	0	0	0	0	0	0
KLX12A	322.10	327.10	1	1	0	0	0	0
KLX12A	327.10	332.10	0	0	0	0	0	0
KLX12A	332.11	337.11	0	0	0	0	0	0
KLX12A	337.11	342.11	0	0	0	0	0	0
KLX12A	342.12	347.12	0	0	0	0	0	0
KLX12A	347.12	352.12	0	0	0	0	0	0
KLX12A	352.12	357.12	0	0	0	0	0	0
KLX12A	357.13	362.13	0	0	0	0	0	0
KLX12A	362.13	367.13	0	0	0	0	0	0
KLX12A	367.13	372.13	0	0	0	0	0	0
KLX12A	372.13	377.13	0	0	0	0	0	0
KLX12A	377.14	382.14	0	0	0	0	0	0
KLX12A	382.14	387.14	0	0	0	0	0	0
KLX12A	387.14	392.14	1	1	0	0	0	0
KLX12A	392.15	397.15	2	0	2	0	0	0
KLX12A	397.15	402.15	2	0	1	1	0	0
KLX12A	402.15	407.15	1	0	0	1	0	0
KLX12A	407.14	412.14	1	0	1	0	0	0
KLX12A	412.13	417.13	0	0	0	0	0	0
KLX12A	417.13	422.13	1	0	1	0	0	0
KLX12A	422.12	427.12	0	0	0	0	0	0
KLX12A	427.12	432.12	0	0	0	0	0	0
KLX12A	432.11	437.11	0	0	0	0	0	0
KLX12A	437.10	442.10	0	0	0	0	0	0
KLX12A	442.10	447.10	0	0	0	0	0	0
KLX12A	447.09	452.09	0	0	0	0	0	0
KLX12A	452.10	457.10	0	0	0	0	0	0
KLX12A	457.10	462.10	0	0	0	0	0	0
KLX12A	462.11	467.11	0	0	0	0	0	0
KLX12A	467.12	472.12	0	0	0	0	0	0
KLX12A	472.12	477.12	0	0	0	0	0	0
KLX12A	477.13	482.13	0	0	0	0	0	0
KLX12A	482.14	487.14	0	0	0	0	0	0
KLX12A	487.14	492.14	0	0	0	0	0	0
KLX12A	492.15	497.15	0	0	0	0	0	0
KLX12A	497.16	502.16	0	0	0	0	0	0
KLX12A	502.16	507.16	0	0	0	0	0	0
KLX12A	502.16	507.16	0	0	0	0	0	0
KLX12A	507.16	512.16	0	0	0	0	0	0
KLX12A	512.17	517.17	0	0	0	0	0	0
KLX12A	517.17	522.17	0	0	0	0	0	0

Borehole ID	SecUp (m)	SecLow (m)	Number of fractures, Total	Number of fractures 10–100 (ml/h)	Number of fractures 100–1,000 (ml/h)	Number of fractures 1,000–10,000 (ml/h)	Number of fractures 10,000–100,000 (ml/h)	Number of fractures 100,000–1,000,000 (ml/h)
KLX12A	522.17	527.17	1	0	1	0	0	0
KLX12A	527.17	532.17	0	0	0	0	0	0
KLX12A	532.17	537.17	0	0	0	0	0	0
KLX12A	537.17	542.17	2	0	1	1	0	0
KLX12A	542.17	547.17	1	0	1	0	0	0
KLX12A	547.17	552.17	0	0	0	0	0	0
KLX12A	552.18	557.18	1	1	0	0	0	0
KLX12A	557.19	562.19	0	0	0	0	0	0
KLX12A	562.19	567.19	0	0	0	0	0	0
KLX12A	567.20	572.20	0	0	0	0	0	0
KLX12A	572.22	577.22	0	0	0	0	0	0
KLX12A	577.27	582.27	0	0	0	0	0	0
KLX12A	582.28	587.28	0	0	0	0	0	0
KLX12A	587.24	592.24	0	0	0	0	0	0
KLX12A	592.25	597.25	0	0	0	0	0	0

Laxemar, borehole KLX12A
Calculation of conductive fracture frequency

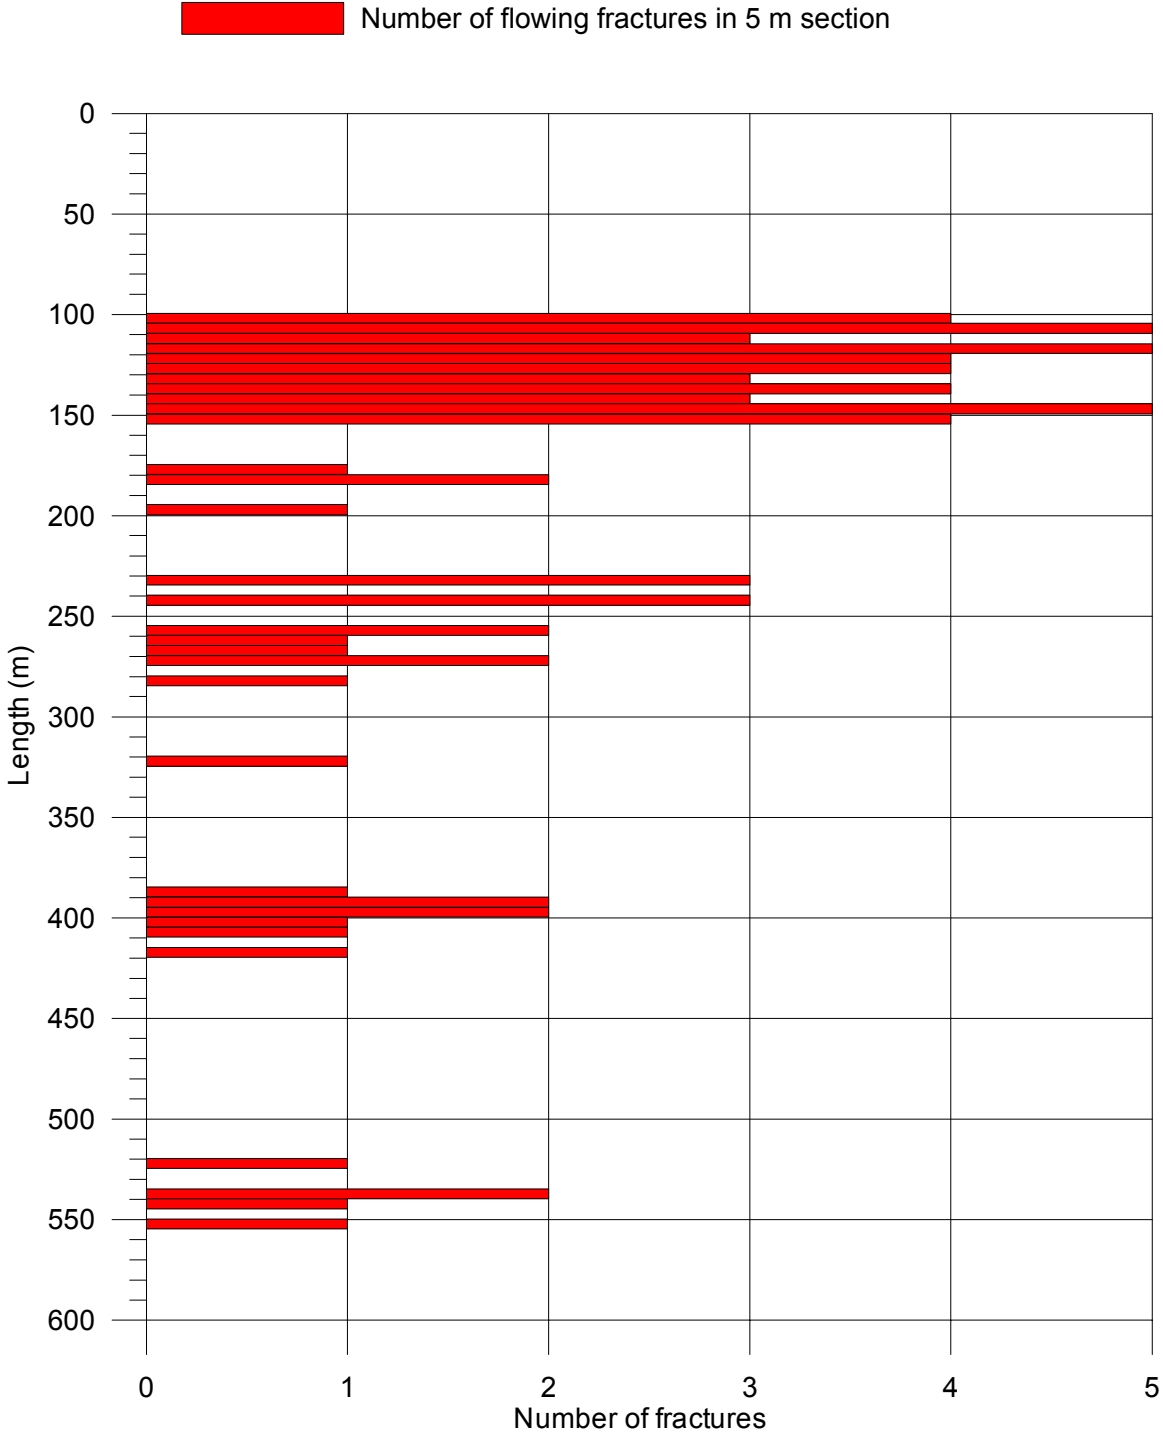


Laxemar, borehole KLX12A
 Comparison between section transmissivity and fracture transmissivity

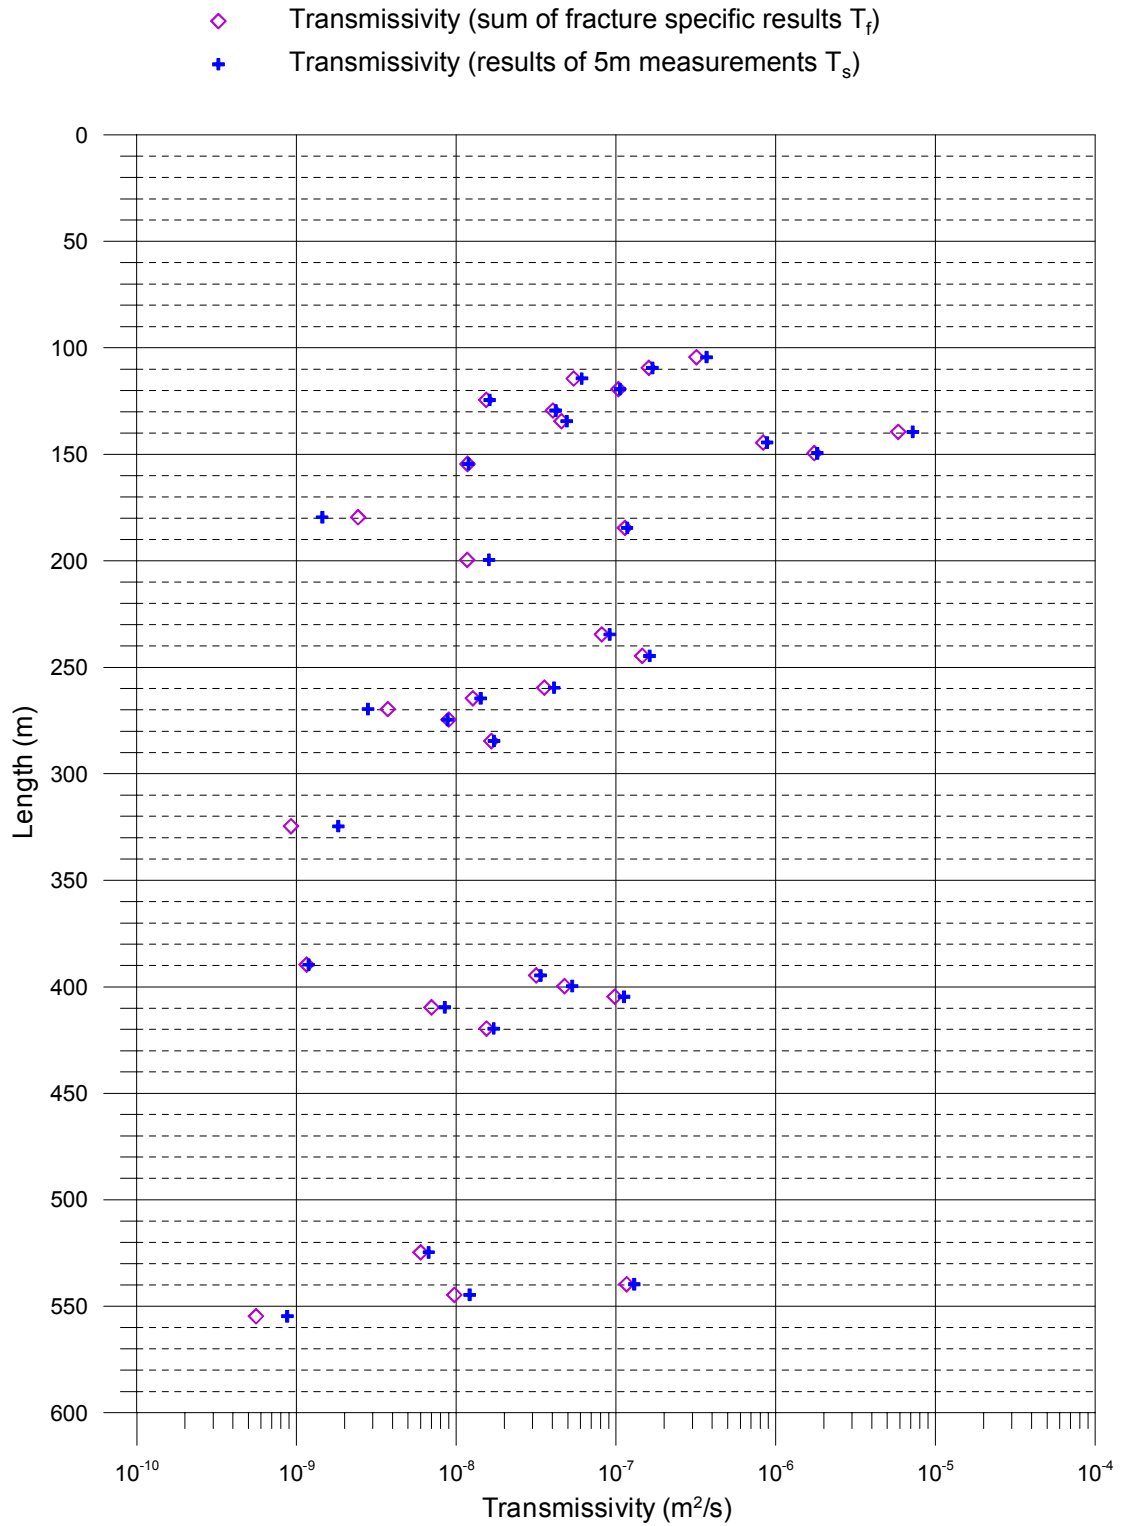

Laxemar, borehole KLX12A
 Head in the borehole during flow logging

Head(masl)= (Absolute pressure (Pa) - Airpressure (Pa) + Offset) / (1000 kg/m³ * 9.80665 m/s²) + Elevation (m)
 Offset = 2460 Pa (Correction for absolut pressure sensor)


- Without pumping (upwards during flow logging, L=5 m, dL=0.5 m), 2006-06-09 - 2006-06-10
- With pumping (upwards during flow logging, L=5 m, dL=0.5 m), 2006-06-11 - 2006-06-12
- With pumping (upwards during flow logging, L=1 m, dL=0.1 m), 2006-06-12 - 2006-06-14
- With pumping (during fracture-EC), 2006-06-14 - 2006-06-15

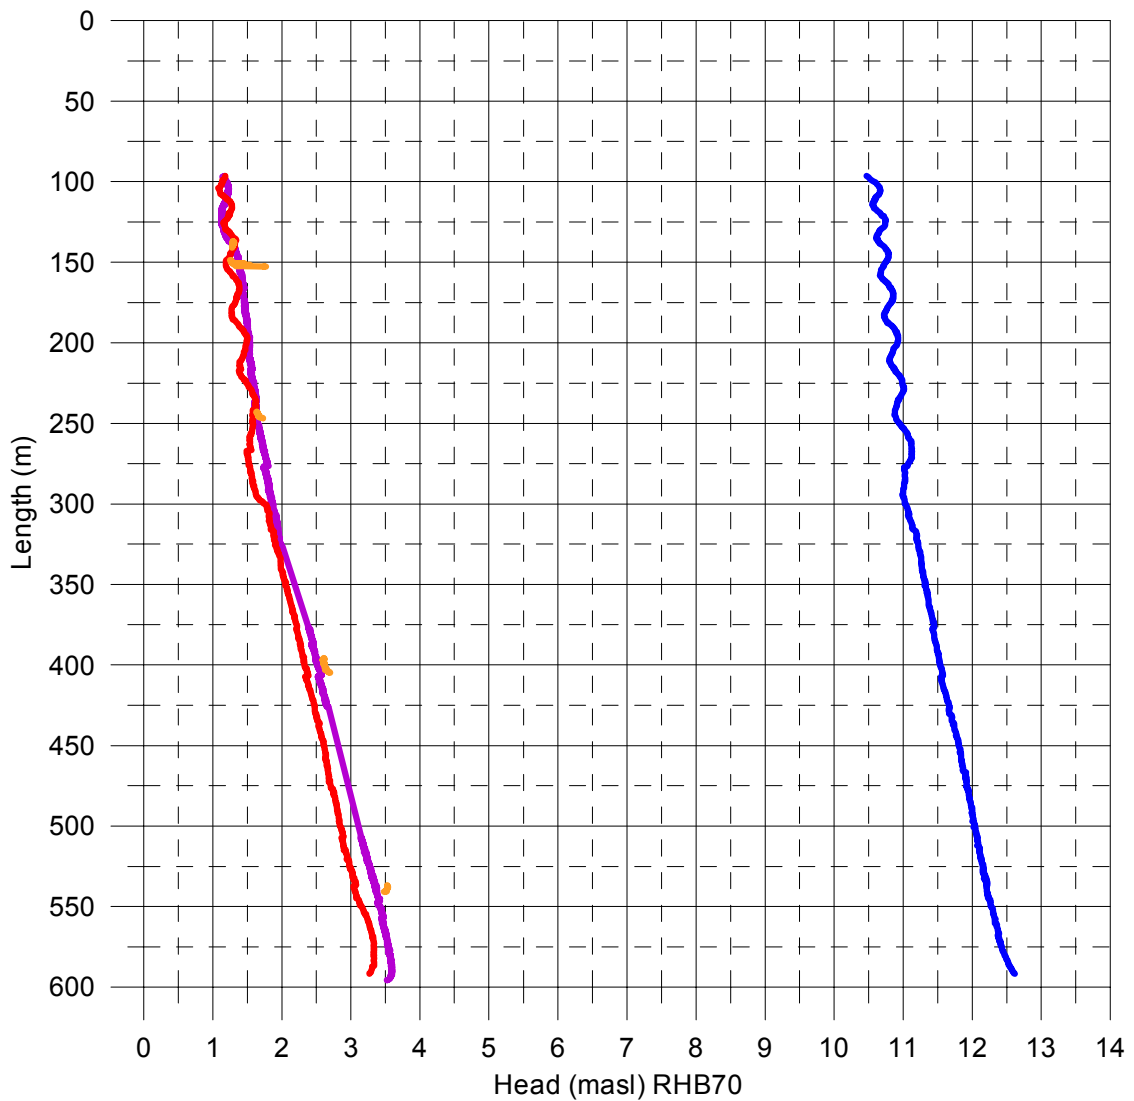

Laxemar, borehole KLX12A

Air pressure, water level in the borehole and pumping rate during flow logging


- Without pumping (downwards during borehole-EC), 2006-06-09
- Without pumping (upwards during borehole-EC), 2006-06-09
- Without pumping (L=5m) (upwards during flow logging), 2006-06-09 - 2006-06-10
- Without pumping (logging of the telescopic part of the borehole), 2006-06-10
- Waiting for steady-state with pumping, 2006-06-10 - 2006-06-11
- With pumping (L=5m) (upwards during flow logging), 2006-06-11 - 2006-06-12
- With pumping (L=1m) (upwards during flow logging), 2006-06-12 - 2006-06-14
- With pumping (during fracture-EC), 2006-06-14 - 2006-06-15
- With pumping (downwards during borehole-EC), 2006-06-15
- With pumping (upwards during borehole-EC), 2006-06-15
- Groundwater recovery after pumping, 2006-06-15 - 2006-06-16
- Groundwater recovery after pumping (measured by SKB), 2006-05-16 - 2006-06-19

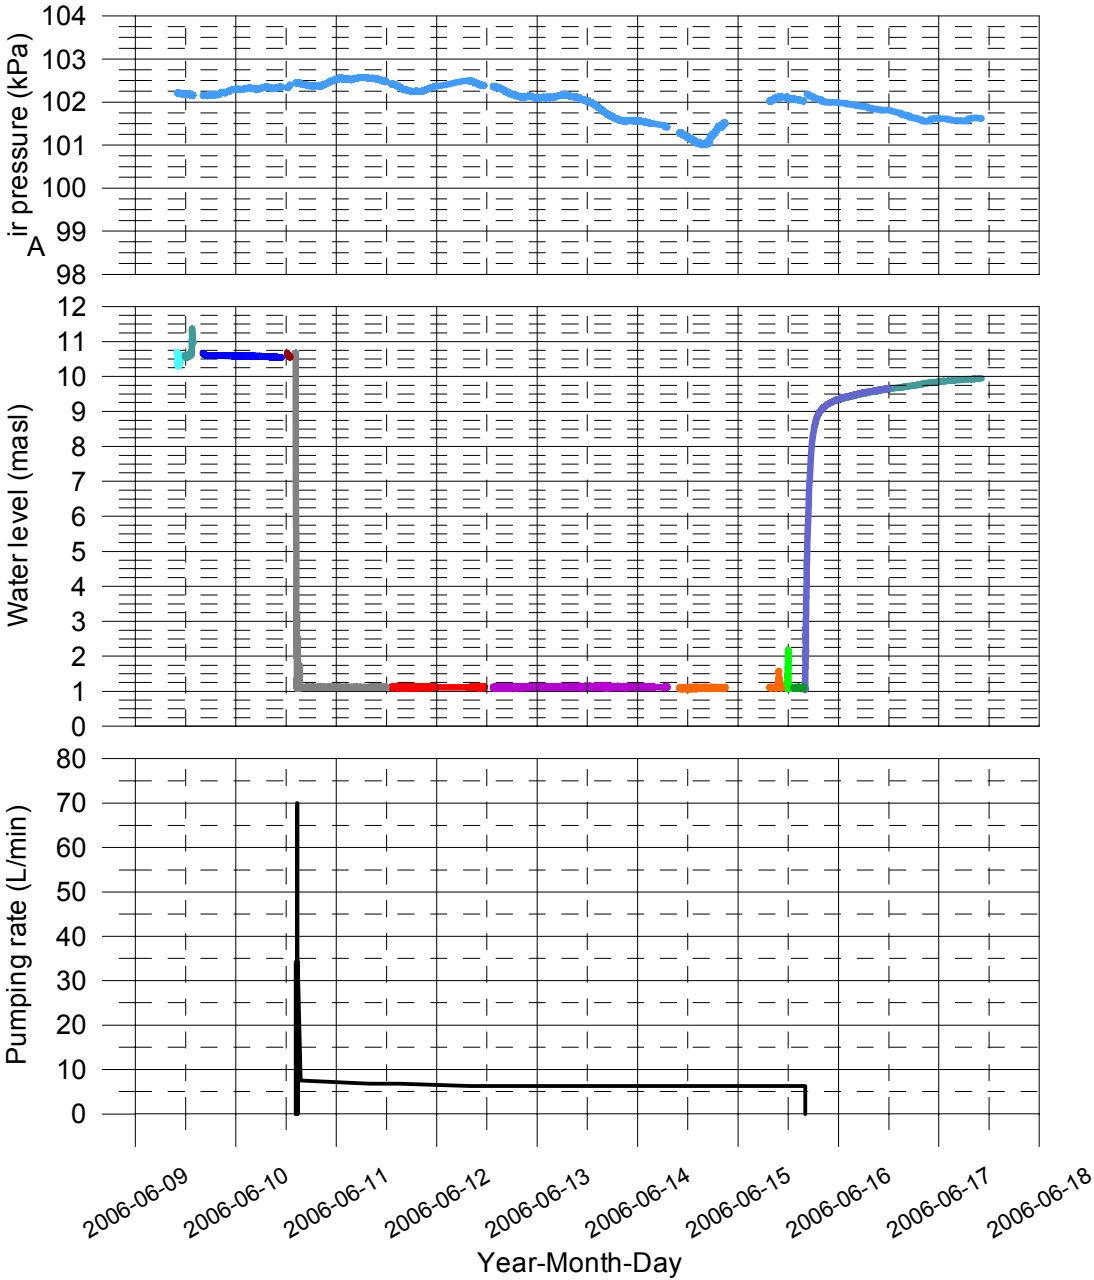


Laxemar, borehole KLX12A Groundwater recovery after pumping

Head(masl) = (Absolute pressure (Pa) - Airpressure (Pa) + Offset) / (1000 kg/m³ * 9.80665 m/s²) + Elevation (m)
 Offset = 2460 Pa (Correction for absolut pressure sensor)

- Measured at the length of 17.61 m using water level pressure sensor
- Corrected pressure measured at the length of 26.32 m using absolute pressure sensor
- Measured by SKB using water level pressure sensor

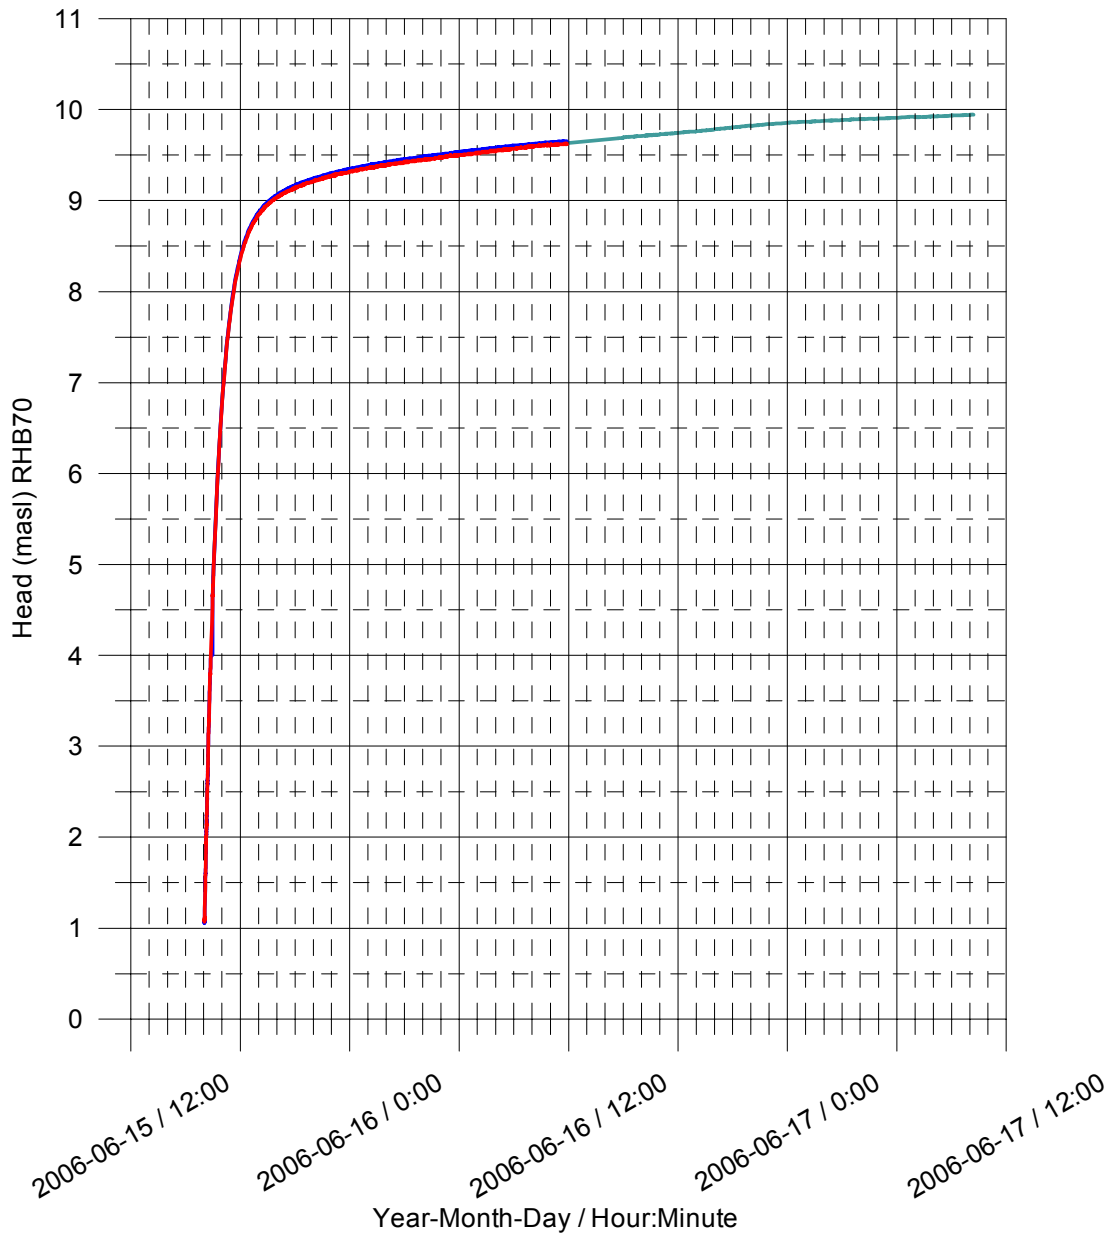

Laxemar, borehole KLX12A
 Vertical flow along the borehole at the length of 102.76 m

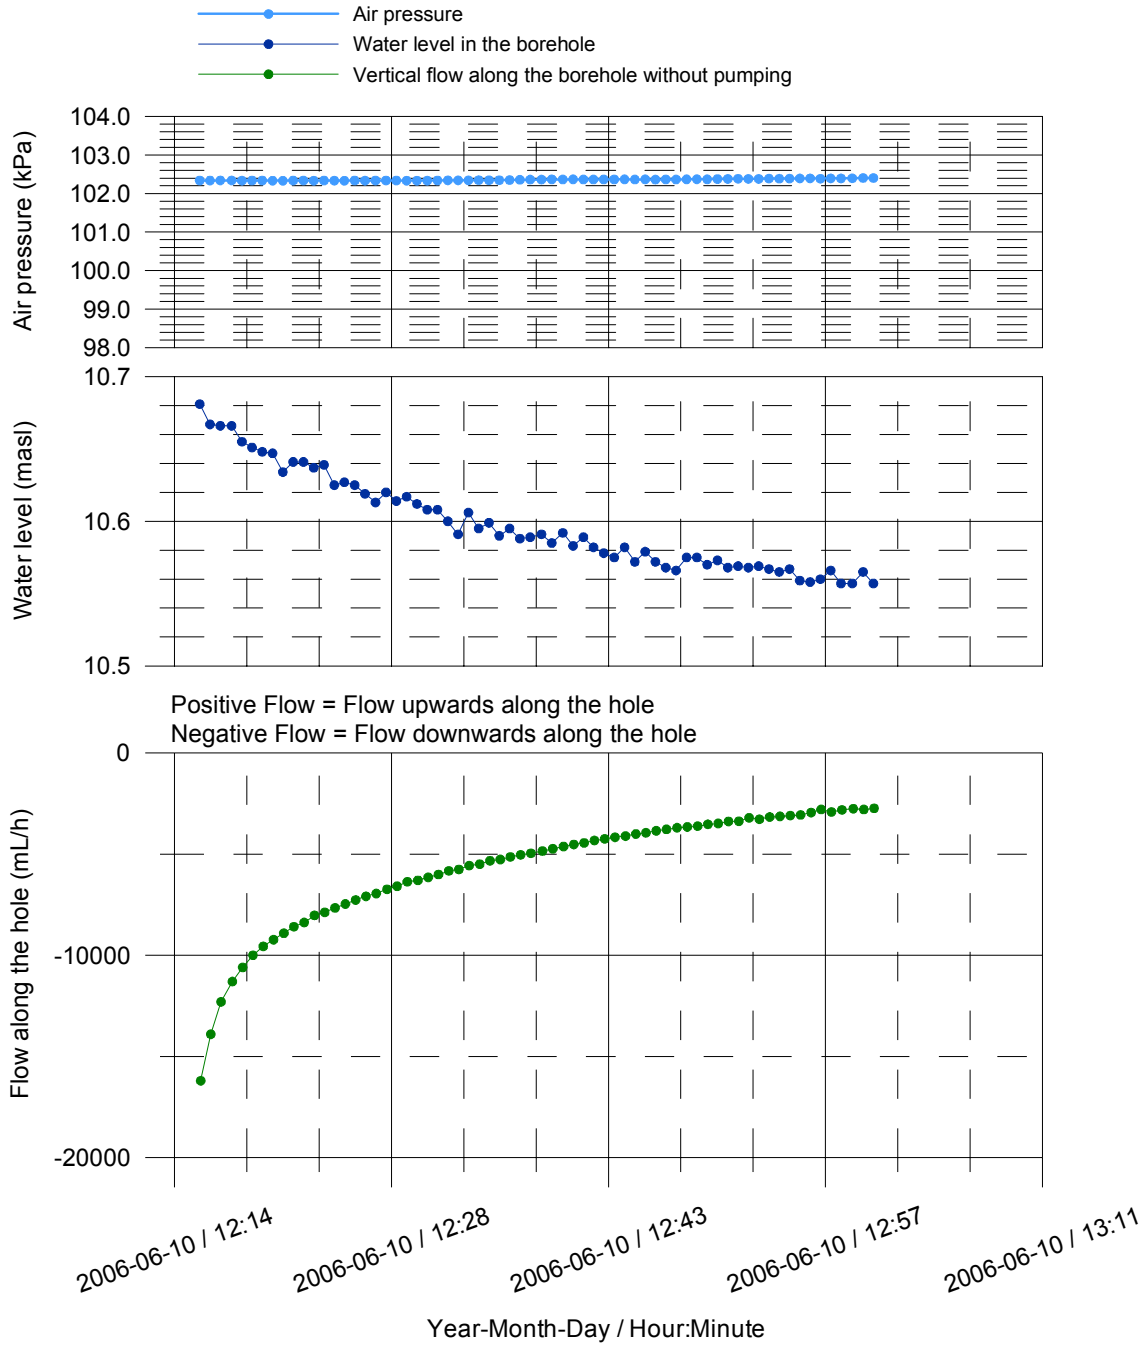

Laxemar, borehole KLX12A
Fracture-specific EC results by date

- EC when the tool is moved
- EC when the tool is stopped on a fracture
- + Last in time series, fracture specific water

